



MAP SHOWING AVAILABILITY OF GROUND WATER, LOCATION OF WELLS AND SPRINGS, AND QUALITY OF WATER

Hydrology by T. W. Lambert, 1964-65

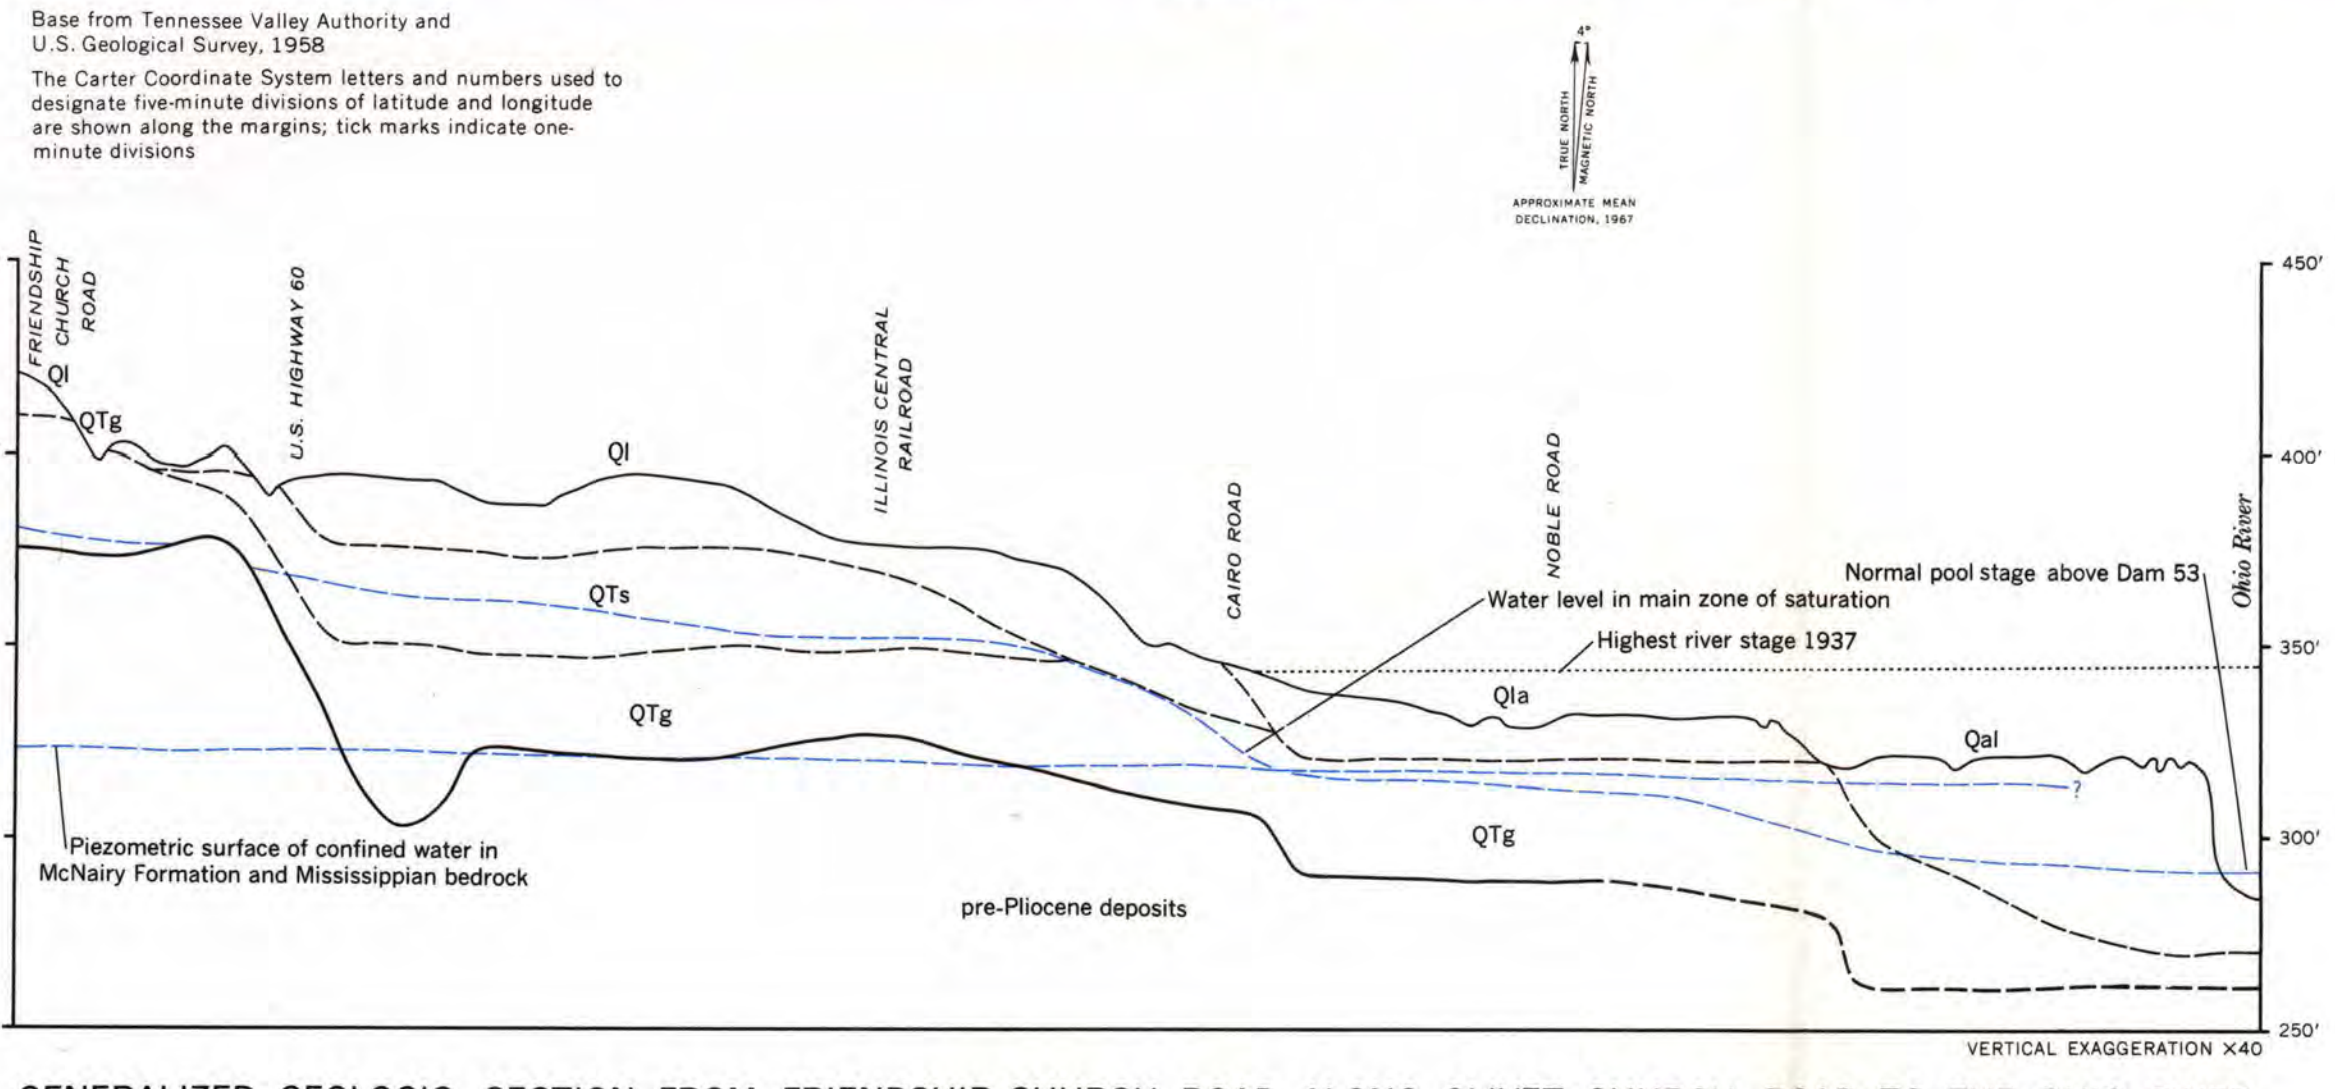

GENERALIZED GEOLOGIC SECTION FROM RIVERVIEW, KY., NORTHWARD TO THE TENNESSEE RIVER AND NORTH-NORTHWEST TO UNIONVILLE, ILL.

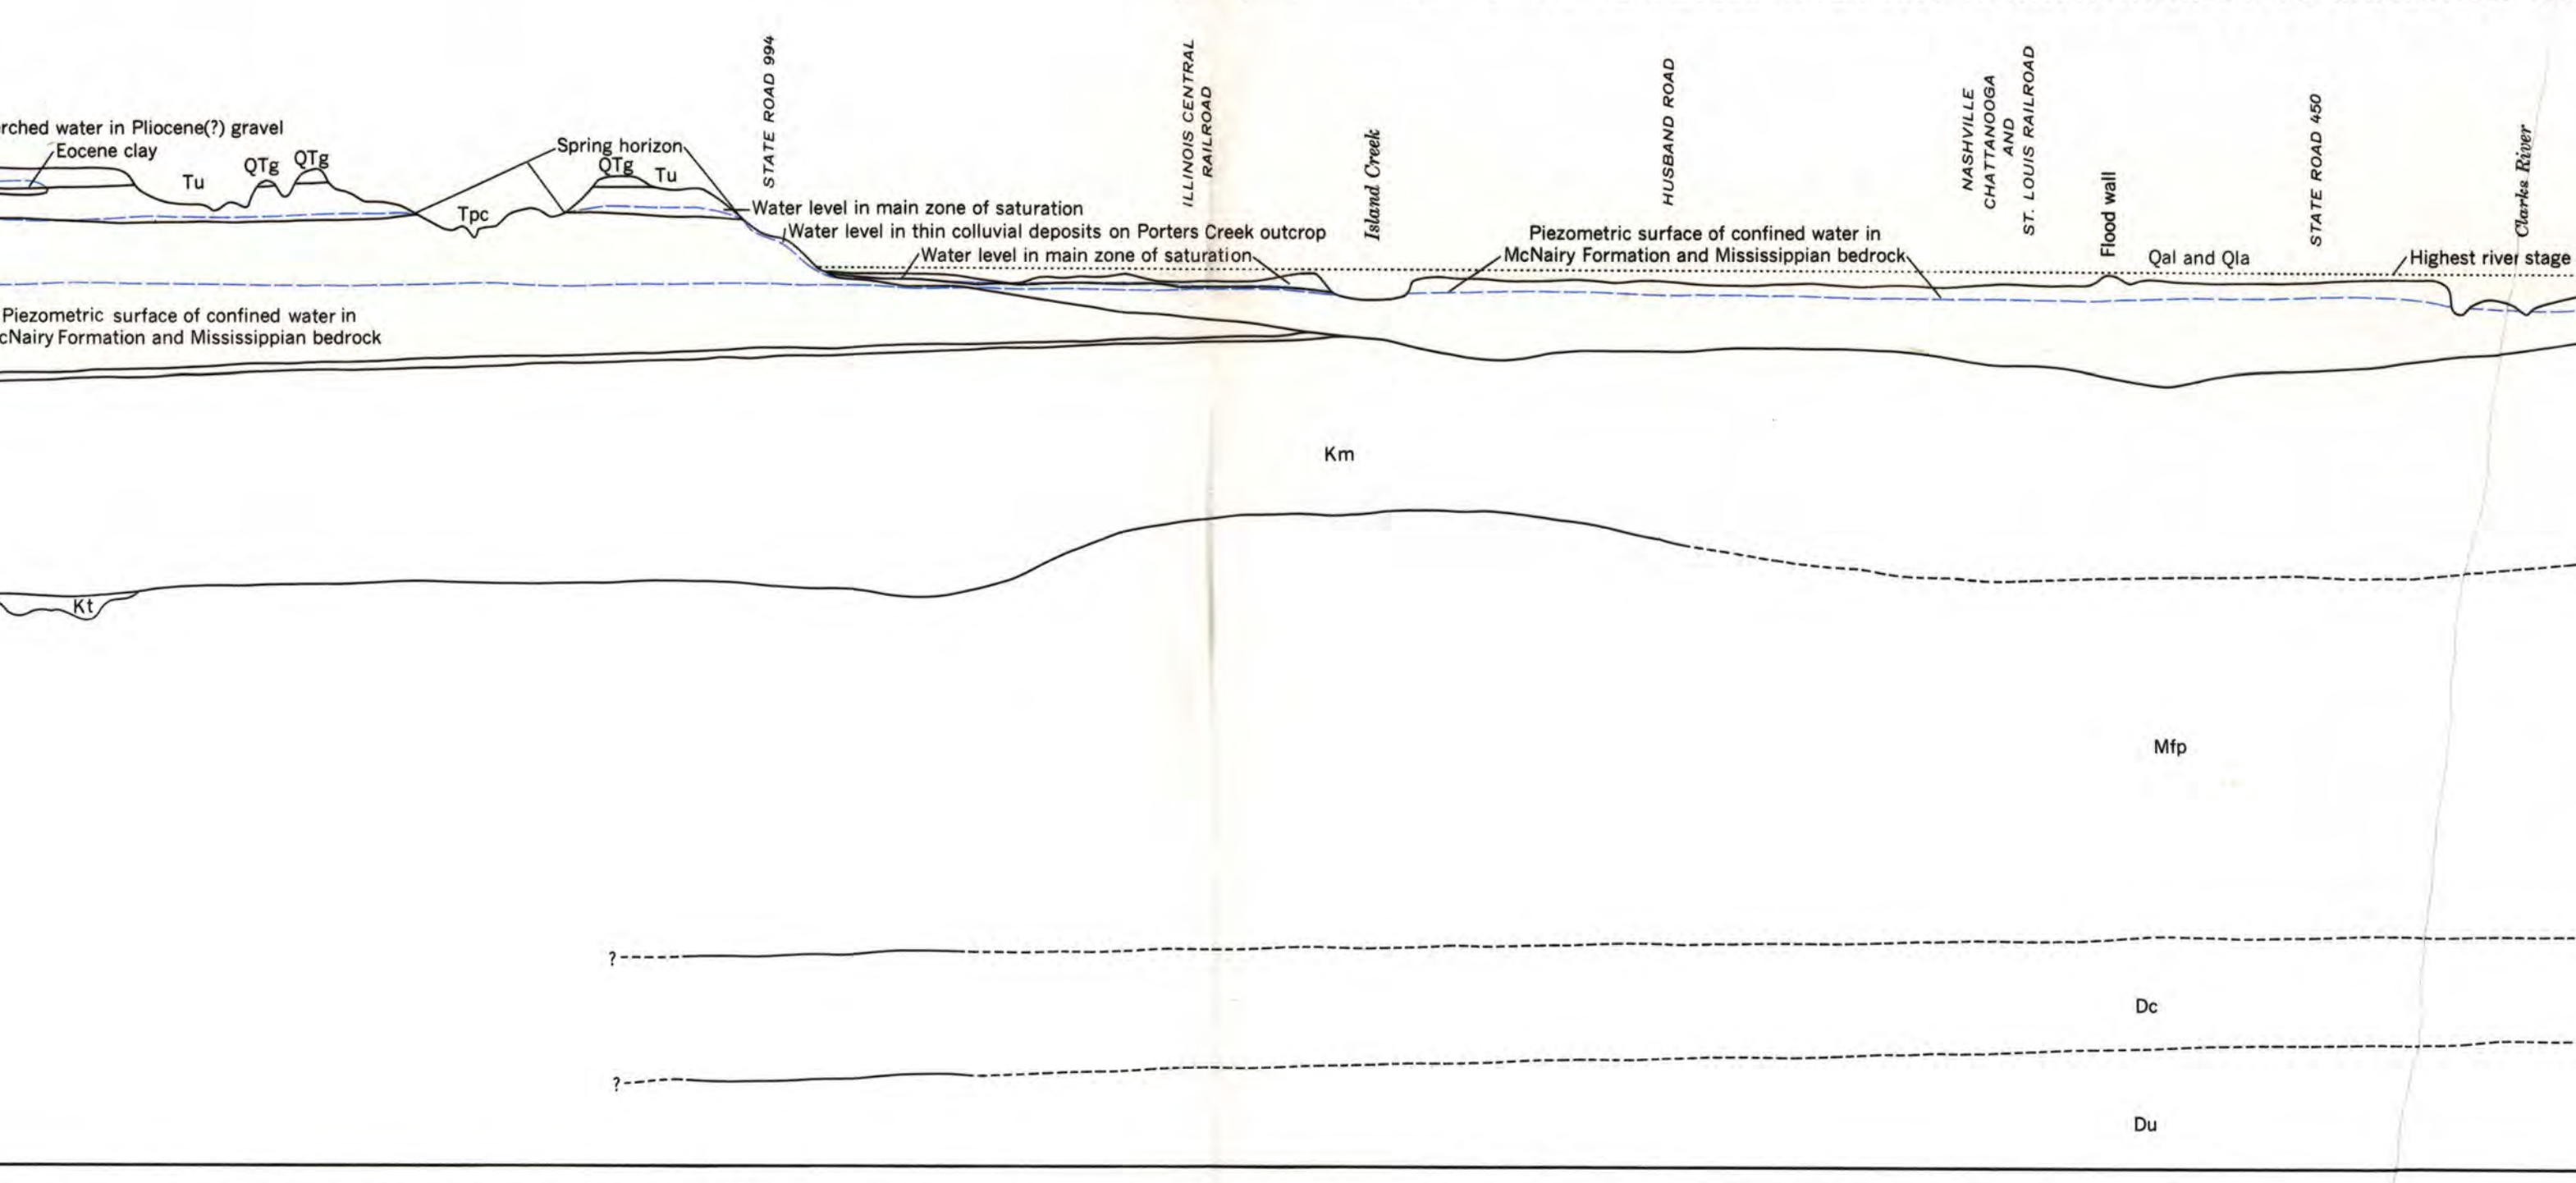

GENERALIZED GEOLOGIC SECTION ALONG EAST-SOUTHEAST-TRENDING LINE FROM ABOUT 2 MILES NORTH OF MASSAC, THROUGH LONE OAK, TO A POINT EAST OF REIDLAND

**EXPLANATION**

The water-availability areas on this map show the occurrence and availability of ground water that may yield adequate amounts of water for domestic use in each area. As indicated in this report, an adequate domestic supply may deliver approximately 500 gallons per day from a well equipped with a power pump and pressure-distribution system. The shallowest aquifer is underlain by deeper aquifers whose geologic and water-bearing properties are described in the generalized columnar section.

**AREA 1**  
Water in Quaternary alluvium  
Bored or dug and drilled wells in area 1 tap the main zone of saturation and supply sufficient water for domestic use except along the edge of area 1 where the alluvium is a lake gravel. Wells tapping this zone for an adequate supply. Water from the alluvium is generally of good quality and is suitable for domestic use. The water level in the alluvium is about 20 feet above the level of annual flooding and is not subject to the seasonal fluctuations of the Ohio River. The main measured flow level of 21.5 feet altitude (1952 feet on Paducah gauge) occurred in 1937.

**AREA 2**  
Water in Quaternary alluvium above the main zone of saturation  
Shallow bored or dug wells in area 2 tap perched water in the alluvium above the main zone of saturation. The water level in the alluvium is about 20 feet above the level of annual flooding and is not subject to the seasonal fluctuations of the Ohio River. The main measured flow level of 21.5 feet altitude (1952 feet on Paducah gauge) occurred in 1937.

**AREA 3**  
Water in Pliocene(?) gravel  
Large-diameter bored wells as deep as 51 feet tap the Pliocene(?) gravel and generally yield sufficient water for domestic use. Generally, north of U.S. Highway 89 west of Paducah yields of more than 200 gpm may be obtained from properly constructed wells. Shallow-diameter bored wells north of State Road 22 (Cairo Road) yield sufficient water for domestic use from State Road 22. The water level in the alluvium is about 20 feet above the level of annual flooding and is not subject to the seasonal fluctuations of the Ohio River. The main measured flow level of 21.5 feet altitude (1952 feet on Paducah gauge) occurred in 1937.

**AREA 4**  
Perched water in the Pliocene(?) gravel  
Shallow large-diameter dug wells tap perched water in the Pliocene(?) gravel above the main zone of saturation. The water level in the alluvium is about 20 feet above the level of annual flooding and is not subject to the seasonal fluctuations of the Ohio River. The main measured flow level of 21.5 feet altitude (1952 feet on Paducah gauge) occurred in 1937.

**AREA 5**  
Perched water in sand of Boone age  
Water is perched above a lignitic clay parting with forming a minor spring horizon. Shallow bored or dug wells near Massac and south of St. Matthews Cemetery tap the perched zone and may yield sufficient water for domestic use. Some dug wells do not penetrate sufficient saturated thickness and are inadequate for peak domestic demand. Water perched in the Boone sand is soft and contains a low concentration of dissolved solids.

**AREA 6**  
Water in sand of Boone age  
Many shallow bored or dug wells yield sufficient water for domestic use and generally yield sufficient water for domestic use. The maximum depth to the water table is about 20 feet. This irregularly occurring sand beds above the Boone sand may be thick enough to supply water to drilled wells. However, large-diameter bored wells penetrate the Boone sand and yield sufficient water for domestic use. The water from thick sand beds contains a high concentration of dissolved solids and a high iron content. The objectionable amounts of iron may be the result of chemical reaction between iron and water. Dissolved iron is precipitated as iron hydroxide and iron sulfide. Large concentrations of iron are reported in water from wells that have plastic casing and steel well casing and pump equipment. Large concentrations of iron are reported in water from wells that have plastic casing and steel well casing.

**AREA 7**  
Water in Porters Creek Clay  
The Porters Creek Clay generally yields water, although sand beds in upper part of the formation may yield a small amount of water to shallow wells. The water is generally of good quality and is suitable for domestic use. The water level in the clay is about 20 feet above the level of annual flooding and is not subject to the seasonal fluctuations of the Ohio River. The main measured flow level of 21.5 feet altitude (1952 feet on Paducah gauge) occurred in 1937.

**AREA 8**  
Water in McNary Formation  
The McNary Formation yields sufficient water for domestic use in most areas. The water level in the McNary is about 20 feet above the level of annual flooding and is not subject to the seasonal fluctuations of the Ohio River. The main measured flow level of 21.5 feet altitude (1952 feet on Paducah gauge) occurred in 1937.

**Area boundary**  
— 1250  
Figure below line is depth of test well

**Q1-Q100**  
Saturated thickness of Quaternary gravel in area 1 and of Pliocene(?) gravel in area 3  
Depth to geologic unit. Where saturated thickness is given, depth is to the base of the Quaternary or Pliocene(?) gravels  
Depth of test hole  
Wells  
D. Drilled or pitied well, generally steel or plastic casing with well screen  
B. Bored or dug well, generally 12-inch, concrete-tile casing or rock  
C. Driven well, generally 1 1/2-inch pipe with a sand point on lower end  
A. Aquifer (see below)  
Water level, in feet below land surface, if measured, 1, if reported  
Yield, in gallons per minute, or adequacy (see below)  
Depth of well, in feet below land surface  
Spring

**Sampling site for quality of surface water**

**AQUIFER SYMBOLS**  
Q1 Alluvium of Quaternary age  
Q2 Perched water in alluvium of Quaternary age  
Q3 Lake deposits of Quaternary age  
Q4 Gravel of Pliocene(?) age  
Q5 Perched water in gravel of Pliocene(?) age  
Q6 Sand of Boone age  
Q7 Sand in sand of Boone age  
Q8 Sand in the Porters Creek Clay of Pliocene age  
Km Sand in the McNary Formation of Cretaceous age  
Mn Mississippian rocks, undifferentiated  
Mm Mississippian rocks, undifferentiated  
Mm Brackish indicates probable aquifers where not definitely known  
YIELD OR ADEQUACY  
(165) Minimum yield in gallons per minute  
(P) Well reported adequate for power pump for domestic and (or) stock supply  
(F) Well reported adequate for hand pump or bucket  
(A) Abandoned or destroyed  
(O) Observation well

**Water-level contour**  
(Dashed line indicates water level in perched zone)  
Shore altitude of the water level in the main zone of saturation. Contour interval of 10 feet, datum is mean sea level. Where topographic readings occur in the subsurface at the altitude of the contour, the water is perched above the underlying saturated zone. The depth to water in the differentials, feet, between the altitude of the water level and the land surface. Water-level measurements made in early 1964, on a scale from 100 feet to 10 feet, were used for the 1964 map. Water-level contours do not match those of U.S. Geological Survey Hydrologic Atlas HA-177 (1964) because measurements were made at a different season and year.

**QUALITY**  
Chemical composition of dissolved solids  
Figure between circular diagram and well symbol refers to analysis number or table at end of report. Figure above line at center of circle is carbonate hardness (calcium magnesium hardness, as CaCO<sub>3</sub>) in ppm (parts per million). Figure below line is dissolved solids in ppm. Hardness of water is classified by the U.S. Geological Survey as follows: 0 to 75 ppm, soft; 75 to 150 ppm, moderately hard; 150 to 300 ppm, hard. Dissolved solids in perched aquifers are computed from specific conductance and are only approximate values. Areas of high specific conductance are proportional to the mineral components in the dissolved solids in the water. Percentages are computed from equivalent per cent of the sodium and calcium. Chloride and magnesium are shown as one percent in perched aquifers. Nitrate shown separately if present in amounts greater than 2 ppm.

GENERALIZED COLUMNAR SECTION AND WATER-BEARING CHARACTER OF GEOLOGIC FORMATIONS

Table with columns: SYSTEM (QUATERNARY, Pleistocene and Recent; Pleistocene; Pleistocene(?); Eocene, unindiverted; Pliocene; Pliocene(?); Miocene; Oligocene; Cretaceous; Devonian; Carboniferous; Mississippian; Devonian), FORMATION, THICKNESS IN FEET, LITHOLOGY, TOPOGRAPHY AND GEOLOGIC SETTING, and HYDROLOGY.


AVAILABILITY OF GROUND WATER IN THE PADUCAH WEST AND EAST QUADRANGLES, ILLINOIS AND JACKSON PURCHASE REGION, KENTUCKY

Water is one of man's most important natural resources. Since early time, man has used water from rivers and lakes. In contrast, sources of underground water are largely undeveloped because they are hidden from view and little is known about them. The people of the Paducah area are fortunate to have large supplies of water readily available to them, both on the surface and under the ground. Although surface water is the most used water resource in this area, because of its abundance and ready availability, ground water is a valuable unused resource which can be developed to a much greater extent in the future. This report, one of a series that includes the entire Jackson Purchase region, provides detailed information concerning the ground water in the Paducah West and East quadrangles.

The sands of the Eocene deposits are important aquifers, supplying many homes and several subdivisions southwest of Paducah.

Along the west edge of the valley of Clarke River, the water table in the alluvium is higher than the piezometric surface of the McNairy Formation and the Mississippian bedrock (see geologic section). Eastward from Island Creek and the Porters Creek Clay this outcrop, the piezometric surface in the McNairy and Mississippian aquifers may be a few feet higher than the water level in the Quaternary alluvium. The chemical quality of ground water is generally good except that the concentration of iron in the water from some aquifers is more than 0.3 ppm (part per million). More than 0.3 ppm of iron may cause staining of textiles and porcelain, imparts a disagreeable taste, and limits the use of untreated water for some industrial uses.

References list including Davis, R. W., 1965, Availability of ground water in the Symons quadrangle, Kentucky; U.S. Geol. Surv. Hydro. Inv. Atlas HA-157; Finch, W. L., Olive, W. W., and Wolfe, E. W., 1964, Ancient lake in western Kentucky and southern Illinois; U.S. Geol. Surv. Paper 501-C, p. C130-133; MacCary, L. M., and Lambert, T. W., 1962, Re-commissioning of ground-water resources of the Jackson Purchase region, Kentucky; U.S. Geol. Surv. Hydro. Inv. Atlas HA-15, 9 p.; Morgan, J. H., 1965, Availability of ground water in parts of the Little Cypress and Culvert City quadrangles in the Jackson Purchase region, Kentucky; U.S. Geol. Surv. Hydro. Inv. Atlas HA-155; Prentiss, H. W., Walker, W. H., and MacCary, L. M., 1957, Geology and ground-water resources of the Paducah area, Kentucky; U.S. Geol. Surv. Water-Supply Paper 1417, 214 p., 11 pls.; Ross, C. A., 1963, Structural framework of southernmost Illinois; Illinois State Geol. Survey Circ. 351, 28 p.; Smithland quadrangles in Illinois; Illinois State Geol. Survey Circ. 360, 32 p.

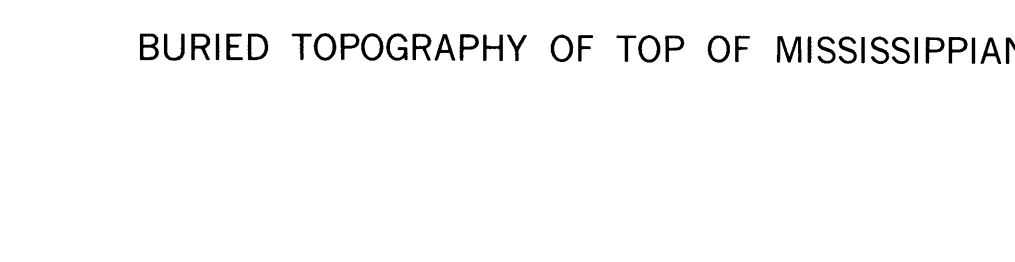

AVAILABILITY OF GROUND WATER IN THE PADUCAH WEST AND EAST QUADRANGLES, ILLINOIS AND JACKSON PURCHASE REGION, KENTUCKY