

THIS REPORT MUST BE FILED WITH A SUPPLY SEARCH WITHIN THIRTY DAYS AFTER COMPLETION OF THIS WELL TO DETERMINE IF THERE IS A PROBLEM WITH THE WELL.

INDICATION OF WELL FROM TOWN (CIRCLE ONE)



INDICATION OF RELATION TO ROADS AND UTILITIES

TO HOUSE, PROPERTY LINE, OR INCLUDE SUITABLE PLAN

PERMIT NO.

75938

ONLY

Formation _____
Local ID _____
Tax ID 5-31-77-31

AFTER A PERMITS IS ISSUED AND ADVICE AND SUBJECT TO THESE REGULATIONS GOVERNING WELL FOLLOWED.

75938

STATE OF DELAWARE
DEPARTMENT OF NATURAL RESOURCES AND ENVIRONMENTAL CONTROL
WATER SUPPLY BRANCH
DIVISION OF ENVIRONMENTAL CONTROL
P.O. BOX 1401
DOVER, DELAWARE 19803

WELL COMPLETION REPORT
BE RETURNED TO DATE OF CONSTRUCTION DATE

WELL COMPLETION REPORT

PERMIT NO. 75938 LOCAL ID 101

OWNER DONALD CLARK SAUNDERS
Rte. 43, Box 286-H, Seaford, DE

CONSTRUCTION DATE 9-22-88
PURPOSE TEST PERMANENT

USE DOMESTIC AGRICULTURAL
 COMMERCIAL INDUSTRIAL
 IRRIGATION PUBLIC
 MONITOR DEWATERING
 HEAT PUMP RECHARGE HEAT PUMP SUPPLY
 OTHER (Specify) _____

IS THIS A REPLACEMENT WELL? YES NO
ABANDONMENT DATE FOR OLD WELL _____
ABANDONMENT METHOD _____

DRILLING METHOD
 AUGERED BORED CABLE TOOL
 DRIVEN JETTED AIR ROTARY
 MUD ROTARY REVERSE WASHED
 OTHER (Specify) _____
TOTAL DEPTH DRILLED 60

CASING SEQUENCE

DEPTH	DIAMETER
+1	
50	
4	
PVC	

SCREEN SEQUENCE

DEPTH	DIAMETER
50	
60	
4	
PVC	

GROUT TYPE: CEMENT BENTONITE CLAY

OTHER _____
FROM 0 TO 30 FEET

NON-GROUT BACKFILL OF WELL ANNULAR SPACE
TYPE Sand/Clay FROM 30 TO 60 FEET

GRAVEL PACK: TYPE GRIT
FROM 30 TO 60 FEET

STATIC WATER LEVEL: DATE 9-22-88
8 FT. (Below/above) GROUND SURFACE
PUMPING WATER LEVEL: 20 FT. BELOW GRADE
AFTER 5 HOURS AT 20 GPM.

WELL HEAD COMPLETION:
TYPE: RITLESS ADAPTOR
OTHER
12 INCHES ABOVE GRADE.


TYPE OF PERMANENT PUMP INSTALLED:

PUMP MANUFACTURE _____
RATED CAPACITY (GPM) _____
PUMP INTAKE SETTING _____ FT. BELOW GRADE

THE COMPLETED WELL IS?

	YES	NO
A. AT LEAST 15' FROM ANY FOUNDATION	<input type="checkbox"/>	<input type="checkbox"/>
B. AT LEAST 50' FROM ANY SEPTIC TANK	<input type="checkbox"/>	<input type="checkbox"/>
C. AT LEAST 10' FROM TOWN SEWER LINE	<input type="checkbox"/>	<input type="checkbox"/>
D. AT LEAST 100' FROM THE NEAREST EDGE OF ANY TILE FIELD	<input type="checkbox"/>	<input type="checkbox"/>

THE NEAREST NEIGHBORS (CIRCLE ONE)
SEPTIC TANK FIELD CESSPOOL OR PRIVY
IS _____ FROM COMPLETED WELL.
IS COMPLETED WELL LOCATED AS SHOWN ON APPLICATION FORM?
IF NO, DESCRIBE LOCATION CHANGE OR OTHER COMMENTS.

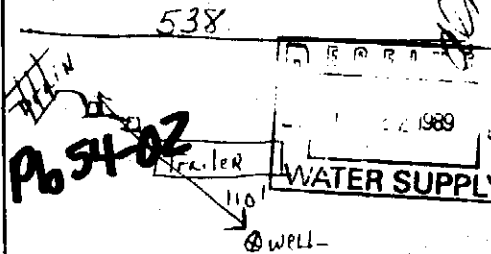

DRILLERS LOG DESCRIPTION TOP OF STRATA BOTTOM OF STRATA

TAN SAND	0	5
TAN CLAY	5	10
TAN SAND	10	60

SUPPLEMENTAL DRILLERS LOG ATTACHED YES NO
PAGE 1 OF 1 PAGES
COMPANY NAME LIFETIME WELL DRILLING CO.
SIGNATURE OF DRILLER IN CHARGE [Signature] DATE _____
WELL LOG NUMBER 75938