

63933

LOCAL ID 101

Moore Bros.

INSTALLATION DATE 3-5-86

TEST PERMANENT

DOMESTIC AGRICULTURAL
COMMERCIAL INDUSTRIAL
IRRIGATION PUBLIC
MONITOR DEWATERING
HEAT PUMP RECHARGE HEAT PUMP SUPPLY

OTHER (Specify)
REPLACEMENT WELL? YES NO

INSTALLMENT DATE FOR OLD WELL
INSTALLMENT METHOD

DRILLING METHOD

BORED CABLE TOOL
JETTED AIR ROTARY
REVERSE WASHED

DEPTH DRILLED 85

CASING SEQUENCE

Table with 2 columns: INNER, OUTER. Row 1: 1 20, 4 PVC

SCREEN SEQUENCE

Table with 2 columns: INNER, OUTER. Row 1: 20, 85, 27 PVC

WRITTEN APPROVAL FOR SCREENING/ GRAVEL PACKING MORE THAN ONE AQUIFER MUST BE OBTAINED FROM DNREC.

CEMENT BENTONITE CLAY

3 TO 20 FEET

BACKFILL OF WELL ANNULUS FROM 20 TO 20 FEET

CHECK TYPE 0 TO 85 FEET

TEST LEVEL: DATE 3-5-86

TEST LEVEL: 30 FT. BELOW GRADE
22 HOURS AT 100 GPM.

AD COMPLETION:

CESS ADAPTOR

ABOVE GRADE

TYPE OF PERMANENT PUMP INSTALLED:

PUMP MANUFACTURE
RATED CAPACITY (GPM)
PUMP INTAKE SETTING FT. BELOW GRADE

THE COMPLETED WELL IS?

- A. AT LEAST 5' FROM ANY OVERHANG
B. AT LEAST 50' FROM ANY SEPTIC TANK
C. AT LEAST 10' FROM TOWN SEWER LINE
D. AT LEAST 100' FROM THE NEAREST EDGE OF ANY TILE FIELD

THE NEAREST NEIGHBORS (CIRCLE ONE)

SEPTIC TILE FIELD OR PRIVY
IS FROM COMPLETED WELL
IS COMPLETED WELL LOCATED AS SHOWN ON APPLICATION FORM?
IF NO, DESCRIBE LOCATION CHANGE OR OTHER COMMENTS.

Rc 23-02

HEB

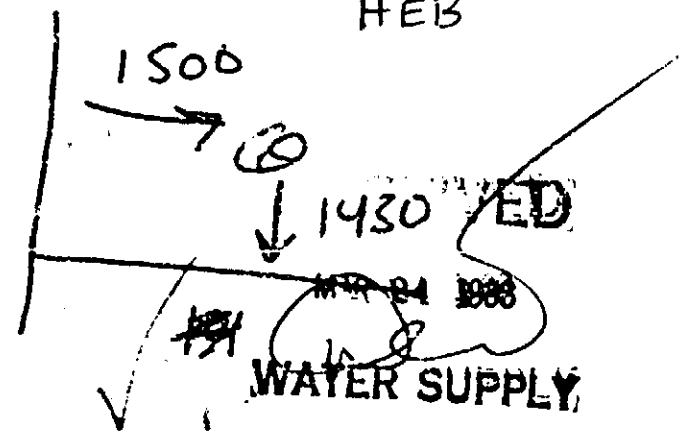


Table with 3 columns: DRILLERS LOG DESCRIPTION, TOP OF STRATA, BOTTOM OF STRATA. Rows include Topsoil, White Clay, Fine Med White Sand, Coarse White Sand, Coarse Tan Sand, White Sand - Fine, Coarse Light Tan Sand, Coarse Gravel, Coarse White Sand, Coarse Tan Sand, and Hard heavy Basalt.

SUPPLEMENTAL DRILLERS LOG ATTACHED YES NO

PAGE 1 OF PAGES

COMPANY NAME

SIGNATURE OF DRILLER IN CHARGE DATE