
Dc53-79

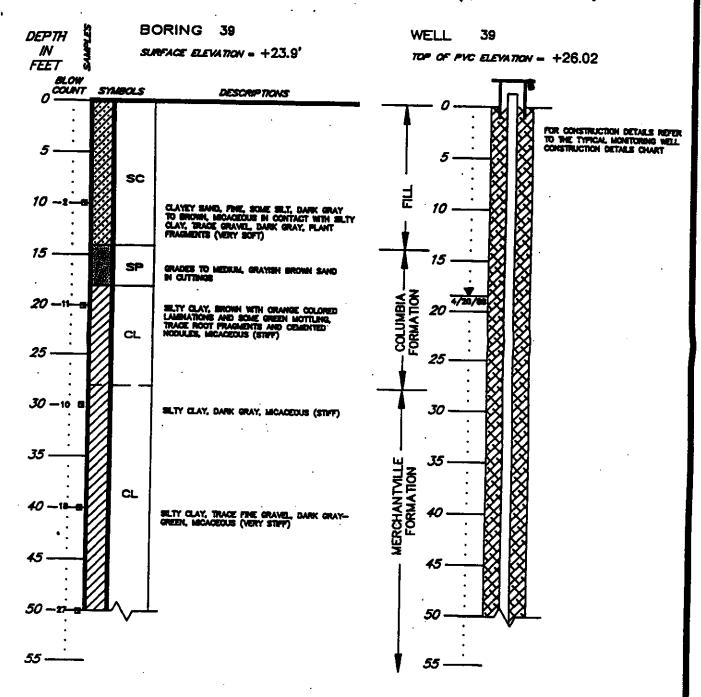

SHEET 1 OF 2

LOG OF BORING AND MONITORING WELL DETAIL TEXACO REFINERY DELAWARE CITY, DELAWARE

DAMES & MOORE

WELL 39 Dc53-79 BORING 39 DEPTH FEET DESCRIPTIONS 50 FOR CONSTRUCTION DETAILS AS TO THE TYPICAL MONITORING IN CONSTRUCTION DETAILS CHART SELTY CLAY, DANK GRAY, MICAGEOUS (MARS) 65 BAND, FRE, LIBRT BIAY WITH TH PLACES (VERY DEPOSE) SW 900 PED 8440 N CUTI SLTY CLAY, LIGHT GRAY VANGEBATED WITH PURPLE, RED, AND YELLOW (NAVE) GRADES TO CEMENTED SAVE CL NOTES: 1. DRILLING COMPLETED TO A DEPTH OF 102 FEET ON 4/12/88. 105 2. BENTONITE DRILLING MUD USED. 3. CAVE IN FROM 77 TO 102 FEET. 4. 4° PVC CASING WITH 0.010 INCH SLOTS FROM 68 FEET TO 73 FEET. 5. GROUND WATER ELEVATION AT +5.87 FEET (ABOVE M.S.L.) OR 18.25 FEET BELOW GROUND SURFACE ON 4/20/88.

SHEET 2 OF 2

LOG OF BORING AND
MONITORING WELL DETAIL
TEXACO REFINERY
DELAWARE CITY, DELAWARE

DAMES & MOORE