

SAMPLES,  
PHOTOS

NOTED BY  
# →

DGS ID PC54-08

DEPTH INTERVAL  
ft

SYMBOL DESCRIPTION

DESCRIPTION, COMMENTS

ADK

hard drilling, dry


26-43' huck-a-buck  
throughout

43' had spot, maybe Fe ore

83' huck-a-buck

tight

tight

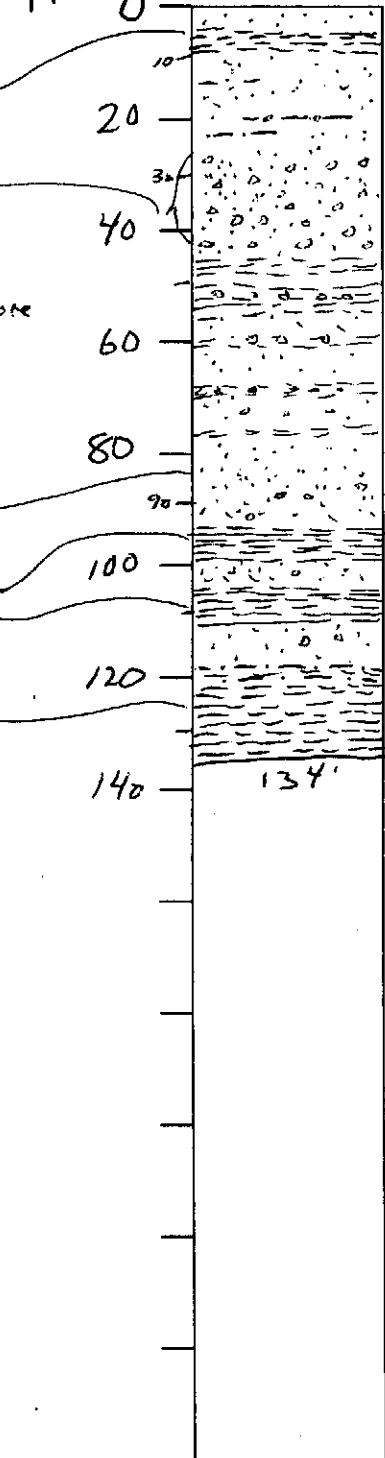

0-1' topsoil  
1-4' yel gry f-md sd, sm slt-silty, sm  
cs, tr f gvl, dk or lys

4-9' lt gry f-md sd and cly  
less cly by 9'

9-12' yel gry v clyay f sd

12-26' yel gry f-md sd, sm-lt slt, sm  
cs stringers w/ f gvl

26-43' gravelly zone

43-83' intbed yel f-md/cs sd that  
coarsens w/ depth (1-5' beds) and  
or-yel gry-dk gry cly (1-5' beds)  
- occasional gvl stringers in cly

83-119' yel-br f sd, sm f-md gvl  
and or-flesh (peach) cly  
93-100 and 104-112'

sands turn dk gry by 120'  
at surface (cuttings)

119-123' dk gry f-vf silty sd

123-134' gry slty cly

**WATER-LEVEL DATA**

Date

Water Level

Device Used 

A	M	O	R	S	T	W
air line	m-scope	other	reported	static level	tape down	water-level recorder