

DGSID

PF53-03

LOCALID

MSB-2

Start Depth

0

Stop Depth

20

Coring Start Time

9:40

Coring Stop Time

Drilling Notes:

Date

10/7/09

Described by


KWR

Blow Counts

Feet

PF 53-03

Core Description

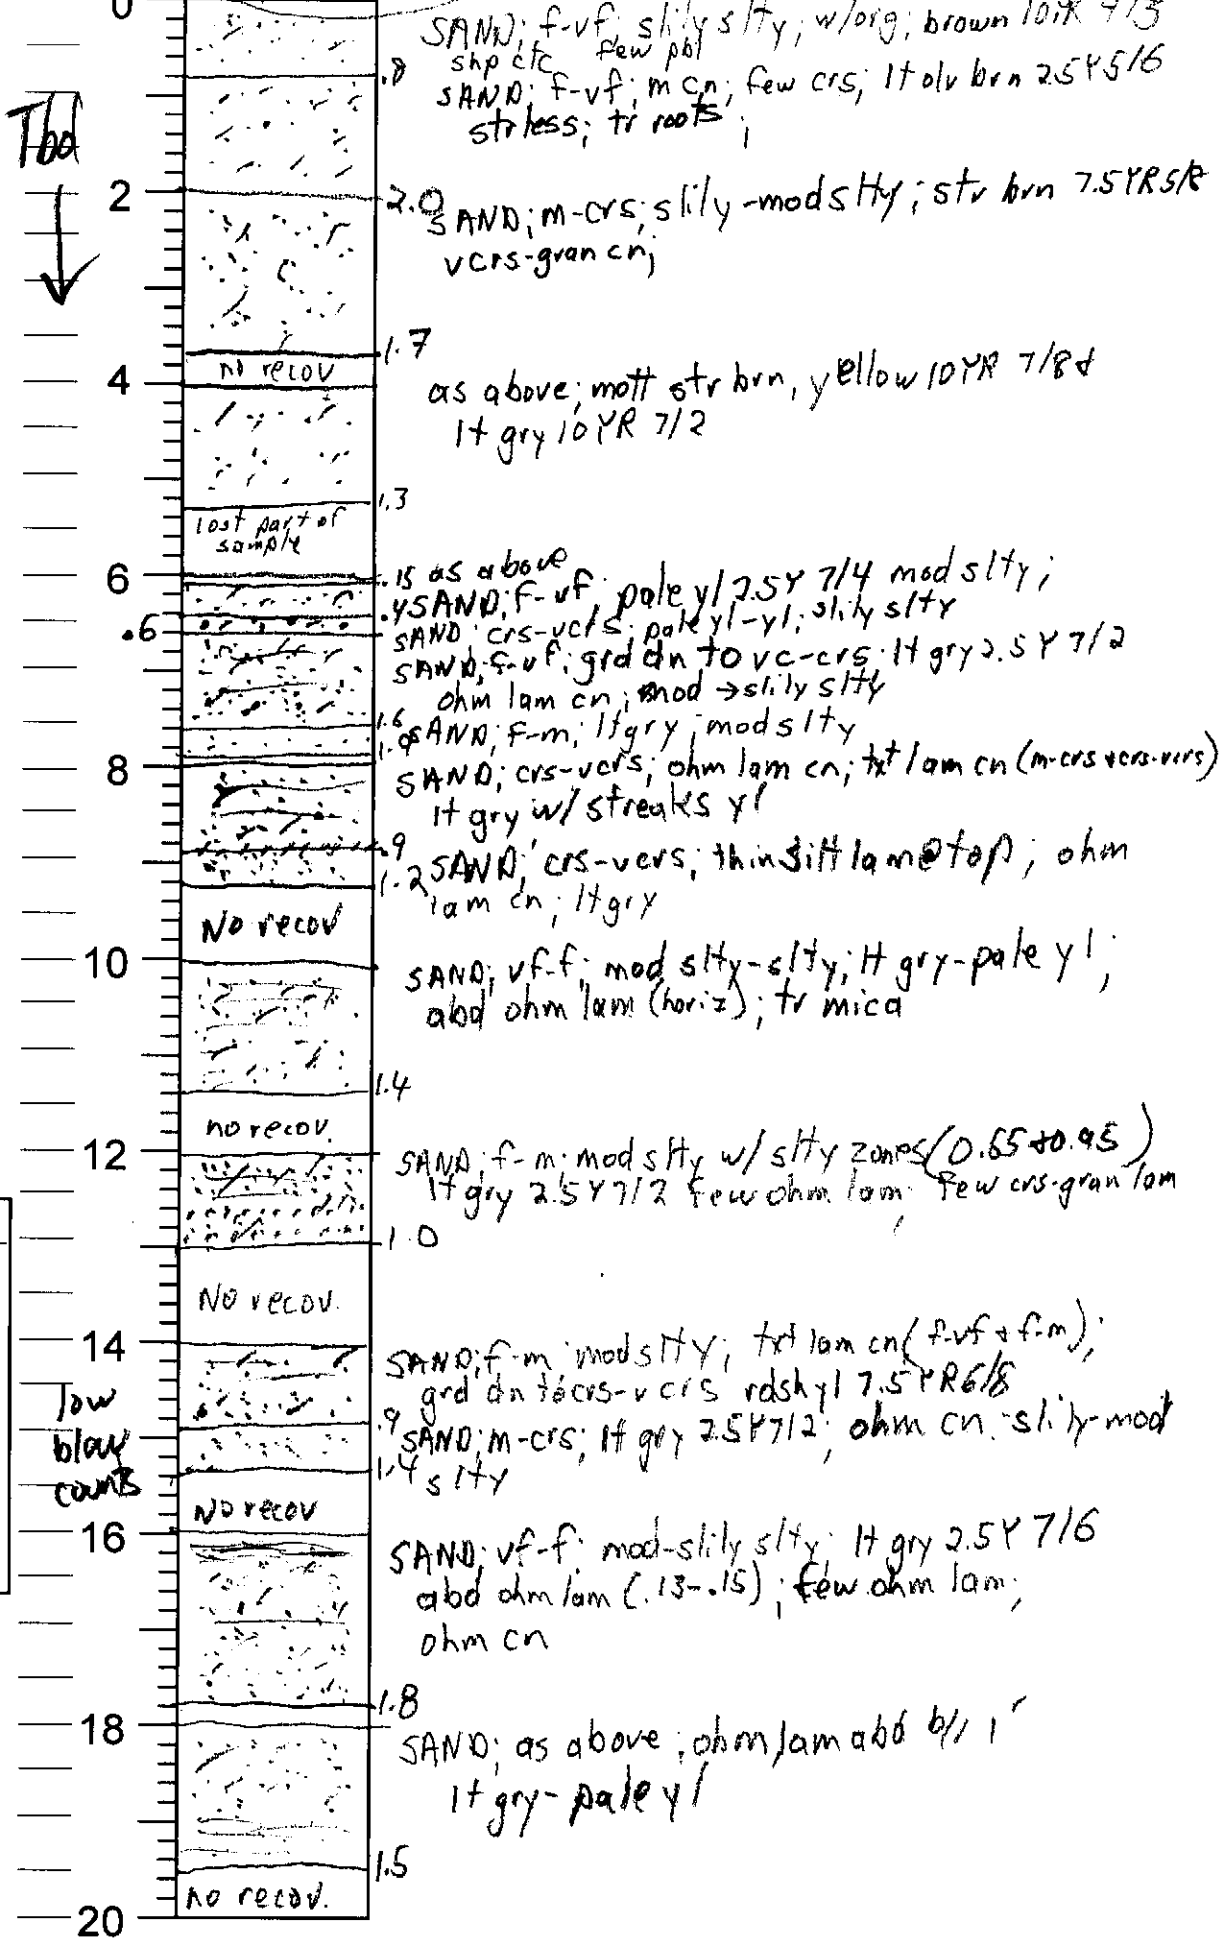

Pf 53-03

DGSID

Pf53-03

LOCALID

MSB-2

Start Depth

0

Stop Depth

20

Coring Start Time

10:45

Coring Stop Time

Drilling Notes:

Date

10/7/09

Described by

KWR

Blow Counts  
Feet

Core Description

20		SAND; f-vf pale y/ 5Y 7/3; few ohm lam, slily-mod slty
	1.6	
22		as above
	.35	
		SAND; vcrs-gran; lt gry-ylsh brn 10YR 5/8 pk gran cn, txt lam
	1.3	
		SAND; crs-m; y/ sh brn
24		no recov.
		SAND; gran-vcrs; gry-blk; abd Mn conc.
	.5	
		SAND; m-crs; y/ 2.5Y 7/6; w/ vcrs-gran lam vcrs-gran 1.4-1.5
	1.5	
26		no recov.
		SAND; vcrs-crs; gran cn; lt gry-pale y/
	.9	
	1.3	SAND; vcrs-crs; few vcrs-gran lam pale y/
28		no recov.
		SAND; vcrs-gran; txt lam (vcrs-crs + vcrs-gran); few Mn conc; pale y/
	.75	
	1.25	SAND; m-crs; ord dn to vcrs-gran pale y/ ohm cn-abd
30		no recov.
		skip
31		SAND; f-vf; slily slty; pale y/; few ohm lam few m-vcrs lam
32		
	1.55	
33		no recov.
35		skip
36		SAND; gran-vcrs; pale y/; txt lam (vcrs-gran + gran)
	.8	
		Inter lam SAND; crs-vcrs + crs-m; pale y/
38		
	1.8	
41		skip
		SAND; m-crs w/ few gran lam; ppl lam 0.8-brnsh y/ 10YR 5/8
42		SAND; vf-ylsh brn 10YR 5/8; w/ thin ohm lam
	1.7	
43		
20		