

DGSID

Re35-08

LOCALID

PTS-2

Start Depth

0

Stop Depth

20

Coring Start Time

Coring Stop Time

Drilling Notes:

Date

5/4/06


Described by

KWR

Blow Counts

Feet

Core Description

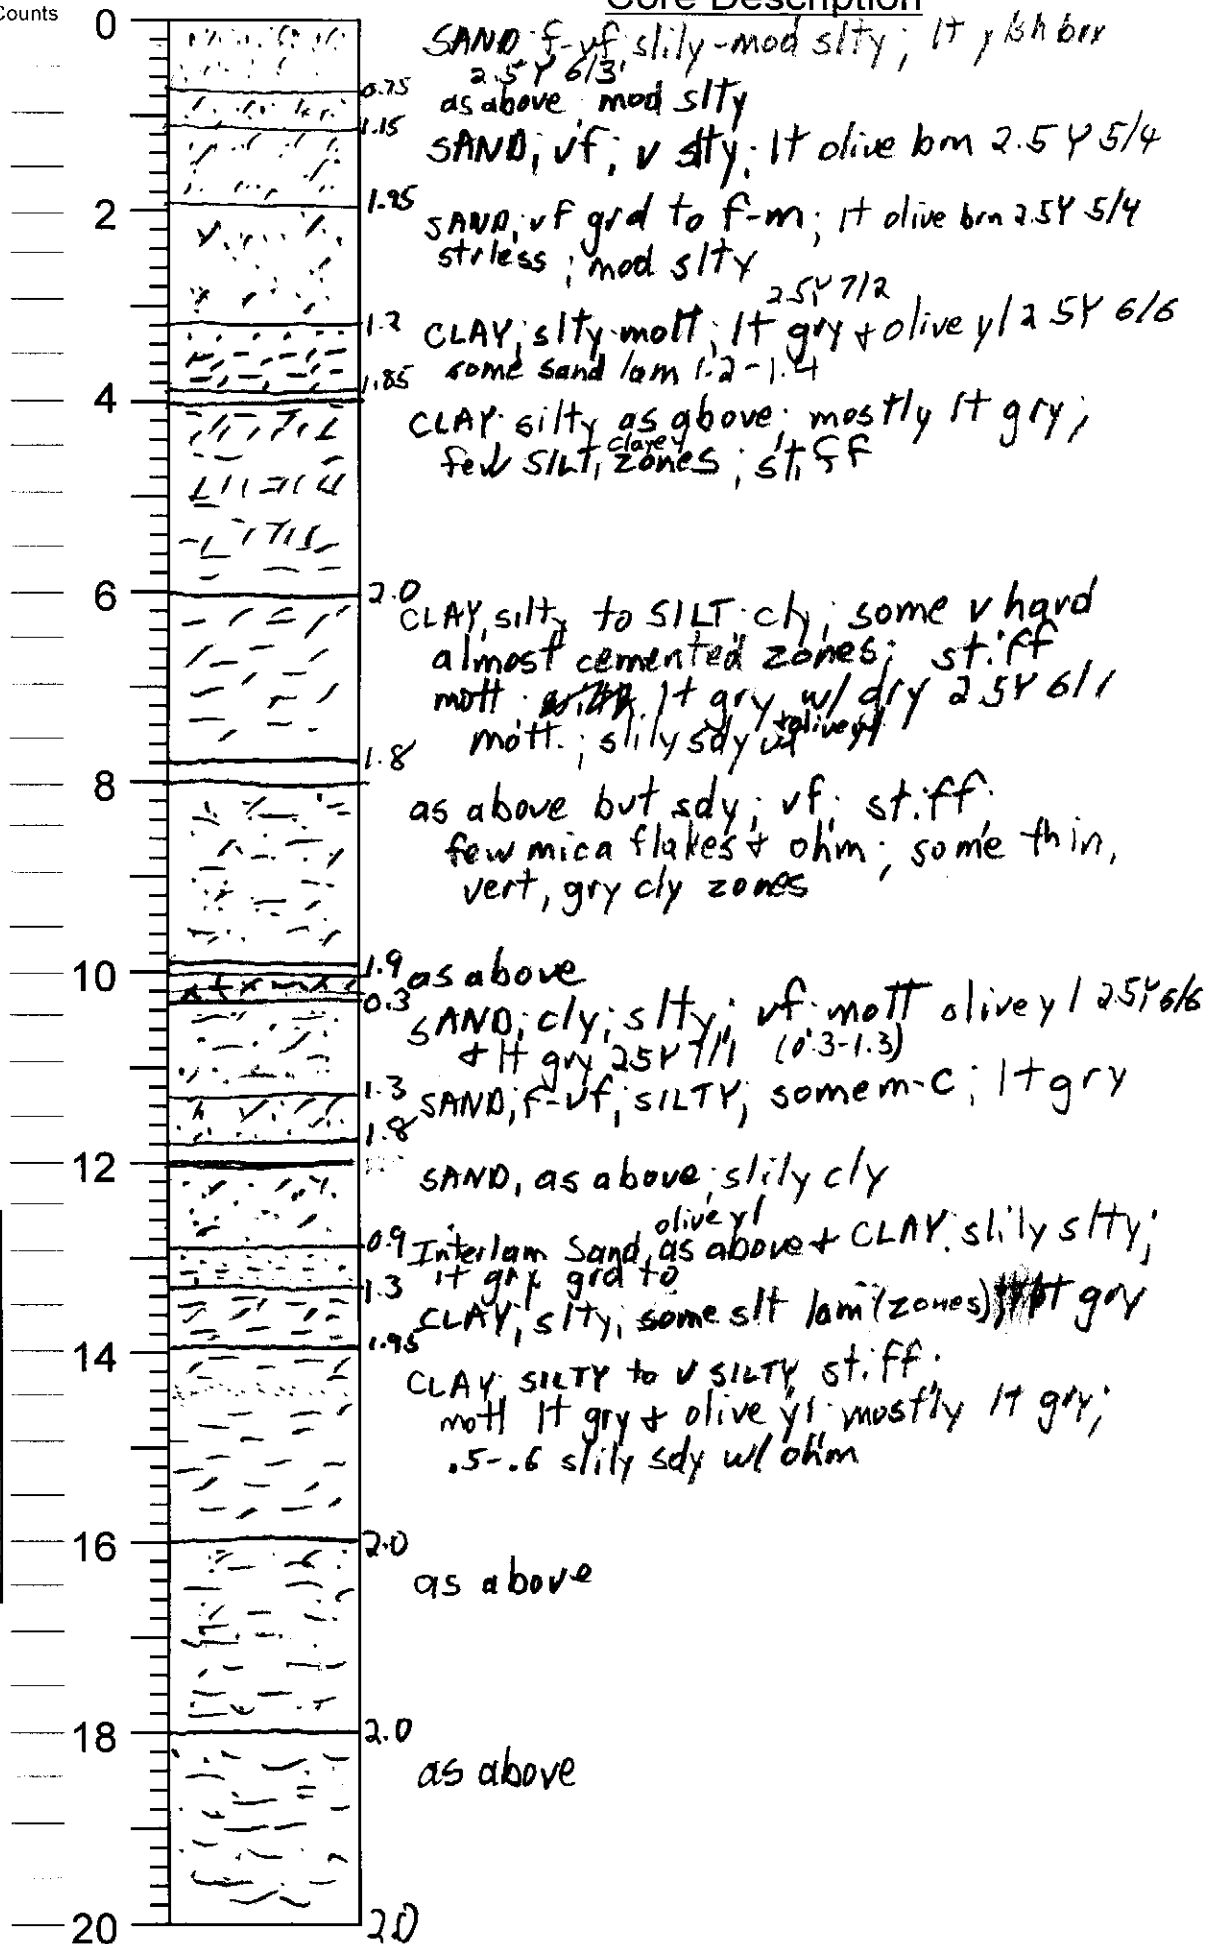

DGSID

Re35-08

LOCALID

PTS-2

Start Depth

20

Stop Depth

36

Coring Start Time

Coring Stop Time

Drilling Notes:


Date

5/4/06

Described by

KWR

Blow Counts
Feet

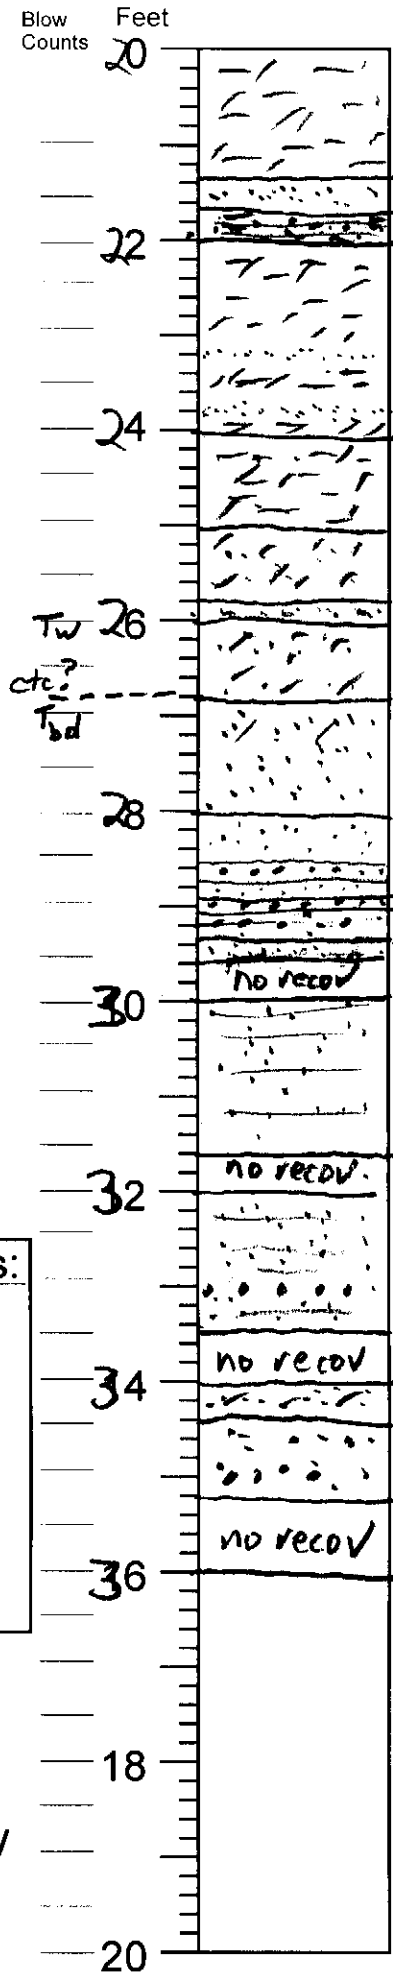

Core Description

CLAY, SILTY. lt gry 2.5Y 7/1; few silt lam; stiff

1.35 SAND; vf; silty olive y 2.5Y 6/6

1.65 20 CLAY, silty w/ vf SAND lam. lt gry as above; getting soft & gummy vf SAND lam; 1.2-1.3, 1.7-1.9 lt gry & olive y

20 CLAY, SILTY to SILT, clayey; silty sdy, vf lt gry

SILT, cly; sdy vf; lt gry; silty cly

18 20 SAND, SILTY; vf. lt gry; ohm on SILT, sdy; vf; soft; lt gry; v silty cly

0.8 SAND; f; thinly lam; silty silt; ohm lam; few f-m lam; grad ch to f-m w/c by 1.8

20 brush y 10YR 6/8 SAND; f-m interlam w c-vc (.5-.7, .9-1.35) brush y

30 no recov SAND; f-m; brush y to lt gry 10YR 7/1 to wh 10YR 8/1; scat ohm lam

32 no recov SAND; f-m; silty silt; wh c lam 1-1.1; scat ohm lam

1.45 34 no recov SAND f-m as above

SAND; c-vc; lam; ohm lam on; 1.2 pink grains

36 no recov