

692880

1



# PUMPING TEMPERATURE FLUID RESISITIVITY


## FLORIDAN MONITOR WELL

880

COMPANY : DIVERSIFIED DRILLING	OTHER SERVICES:	
WELL : FLORIDAN MONITOR WELL	FLOW	
LOCATION/FIELD : WEST PALM BEACH WTP	CALIPER	
COUNTY : PALM BEACH		
STATE : FLORIDA		
SECTION :	TOWNSHIP :	RANGE :
DATE : 09/04/96	PERMANENT DATUM : PL	ELEVATIONS
DEPTH DRILLER : 1290	ELEV. PERM. DATUM: N/A	KB : N/A
LOG BOTTOM : 1279.70	LOG MEASURED FROM: PL	DF : N/A
LOG TOP : 843.40	DRL MEASURED FROM: PL	GL : N/A
CASING DRILLER : 975	LOGGING UNIT : 1	
CASING TYPE : STEEL	FIELD OFFICE : DFB	
CASING THICKNESS: .375	RECORDED BY : M. SCHILLING	
BIT SIZE : 11	BOREHOLE FLUID : WATER	FILE : ORIGINAL
MAGNETIC DECL. :	RM :	TYPE : 9041A
MATRIX DENSITY :	RM TEMPERATURE :	LOG : 2
FLUID DENSITY :	MATRIX DELTA T :	PLOT : MARK 4
NEUTRON MATRIX :	FLUID DELTA T :	THRESH:
REMARKS :		

OBSERVER: MURDOCK MONROE - BARNES, FERLAND & ASSOCIATES  
 LOGGED ON WELL BEING PUMPED AT 740 GPM  
 ALL SERVICES PROVIDED SUBJECT TO STANDARD TERMS AND CONDITIONS

CHART NO. 00  
MADE IN U.S.A.

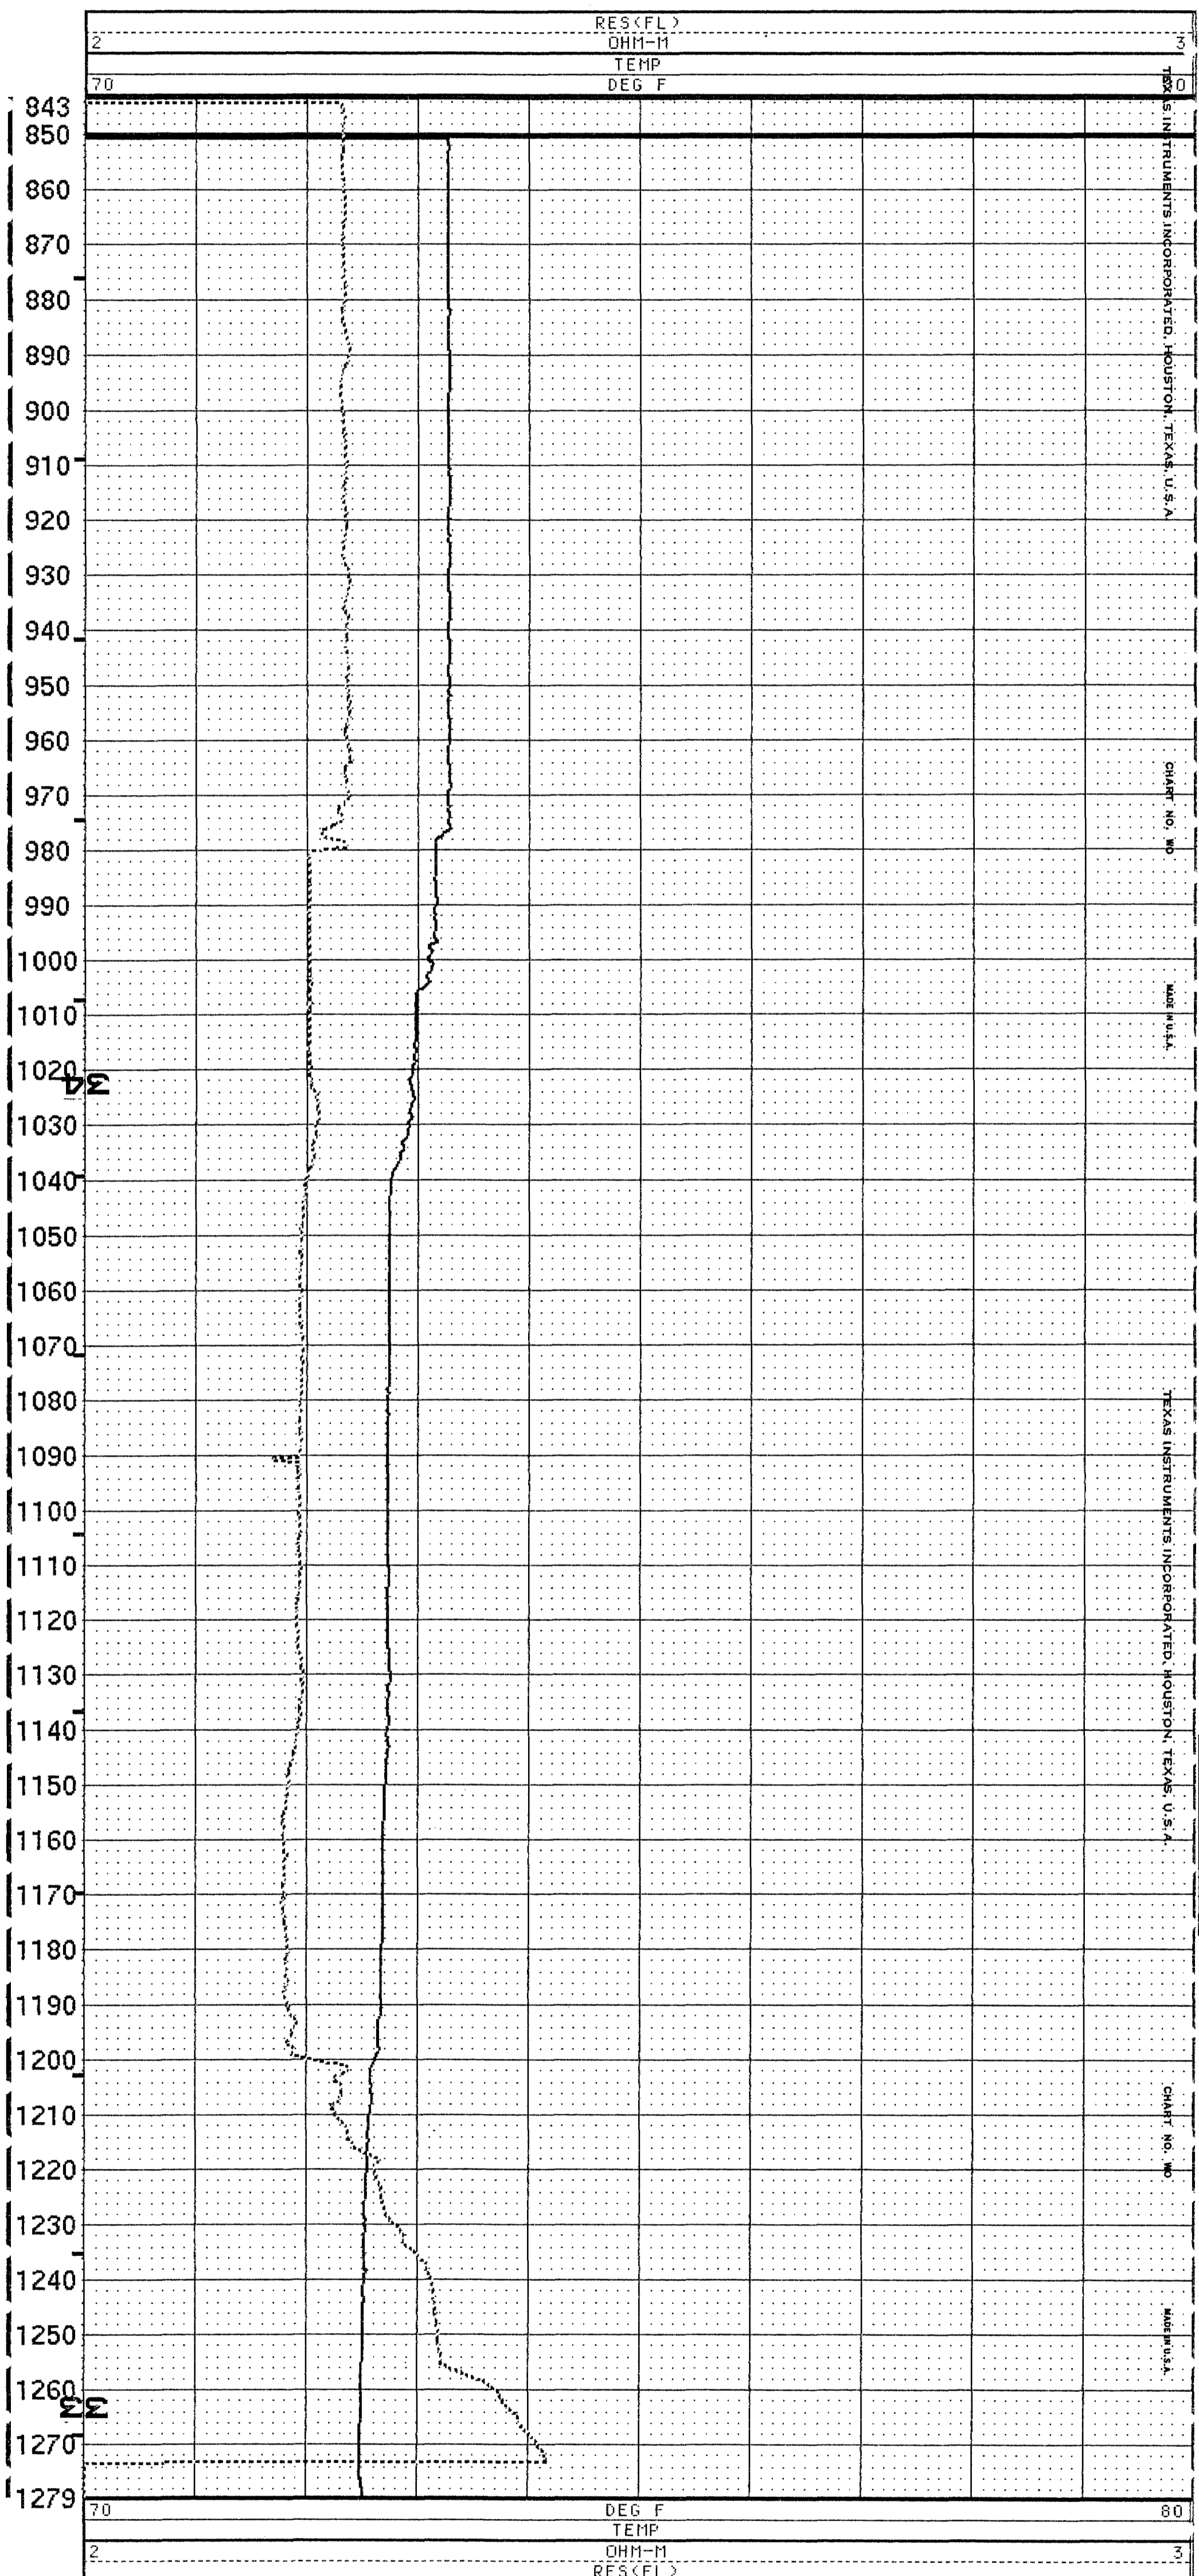

### REPEAT SECTION

