


694082

Sheet 3 of 3



GEOPHYSICAL WELL SURVEY

CLIENT: Miami-Dade Water & Sewer Authority Date: 4/29/79
 Well No.: I-6 Project No.: BC55900.92

Location: State: Florida County: Dade
 NE 1/4 NE 1/4 NE 1/4 Sec. 21 T. 56 N R. 40 E
 S W

Logged by: J. Lehnen Observer:

Owner: Miami-Dade Water & Sewer Authority
 Well: I-6
 Driller: Aisay-Pippin Corp. Date Drilled: 1979
 Surface Elevation: 9.42 ft. Estimated Measured Above MSL
 T.D. Logged: 960' T.D. Driller: 1004'

Hole Dia: 12-1/4" from 128' To 960' Dia: From To
 Casing I.D. 54" From 0' To 128' Dia: From To
 Finish: Open hole Screen Gravel Other
 Water Level: ft. Above Below MP. Above Below Land Surface
 Yield: Flow gpm Pump gpm
 Drawdown: ft. after hours pumping @ gpm
 Use: Dom. Stock PS Ind. Irr. Test
 Heating or cooling Drainage Disposal Obs.

Water Quality:
 Temp. °F Sp. Cond. Iron ppm
 Cl⁻ ppm; SO₄⁻² ppm; Total Hardness ppm
 Color Odor Taste

Remarks: All depths measured from top of concrete pad.
 Temperature log run 18 hours after cementing

- Electric
- Gamma Ray
- Temperature
- Caliper
- Fluid Resistivity
- Fluid Velocity


Log Scales

Electric Log SP 25 millivolts/inch Res. 10 ohms/inch	Fluid Resistivity ohm-meters/inch @ °F
Gamma Ray Log 10 Counts/sec/in. Time Constant 4 sec. Logging speed 30 FPM	Fluid Velocity Counts/min/inch (stationary) FPM (continuous) Q = gpm
Temperature 5 °F/inch Logging speed 20+ FPM	Caliper inches to inches Logging speed FPM

Water Samples
Depths sampled:




CH2M HILL
Water Resources Division
P.O. Box 1647
Gainesville, Florida 32602
(904) 377-2442

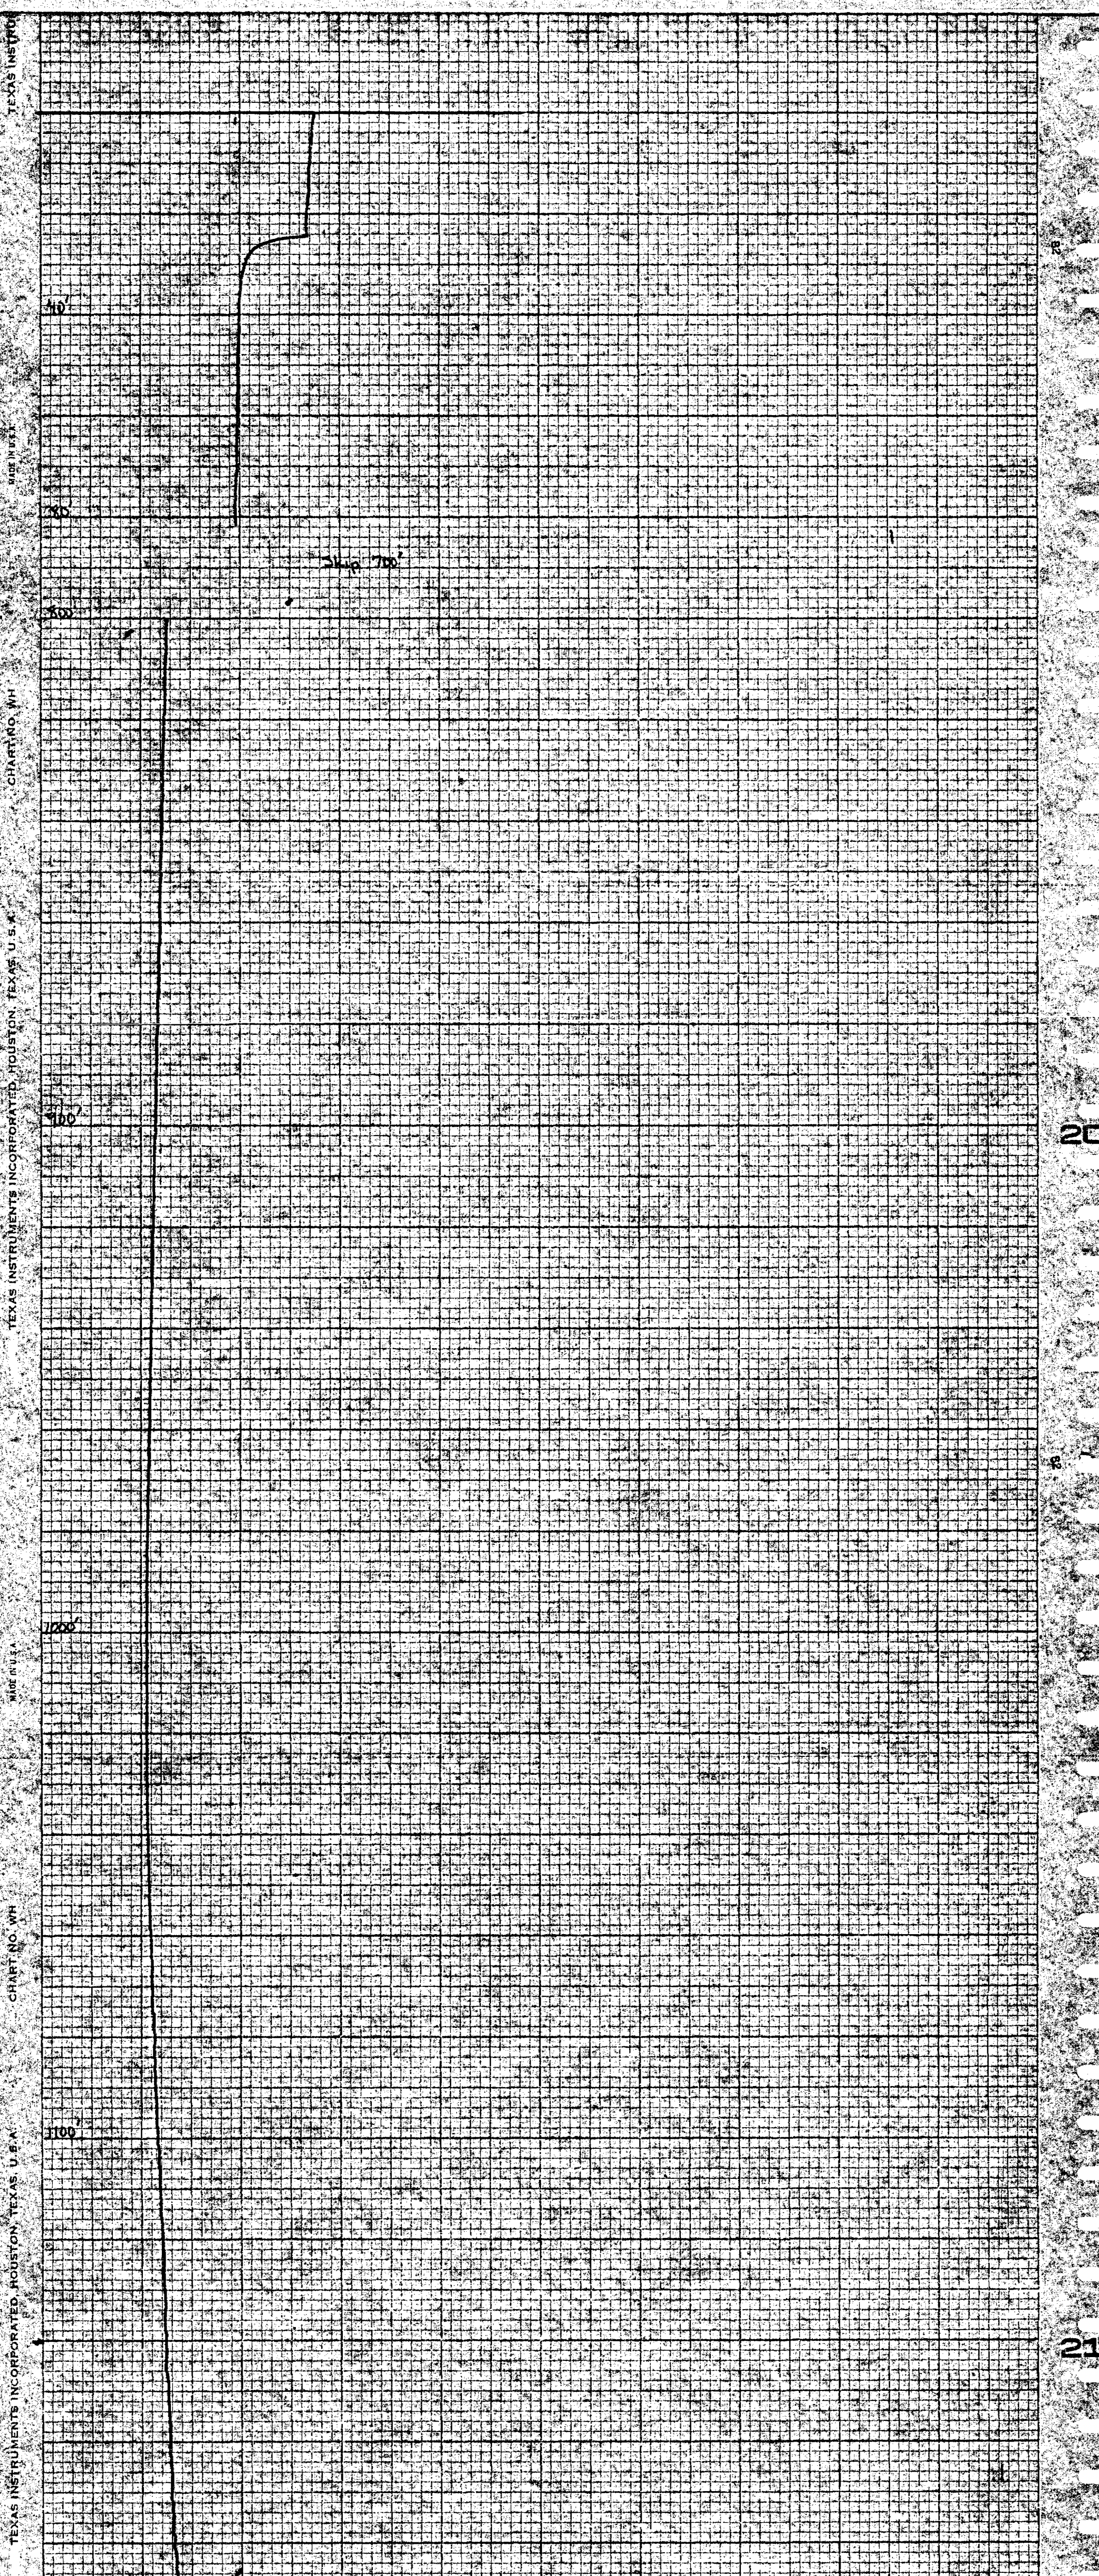

TEXAS INSTRUMENTS INCORPORATED, HOUSTON, TEXAS U.S.A. CHART NO. WH

20
21

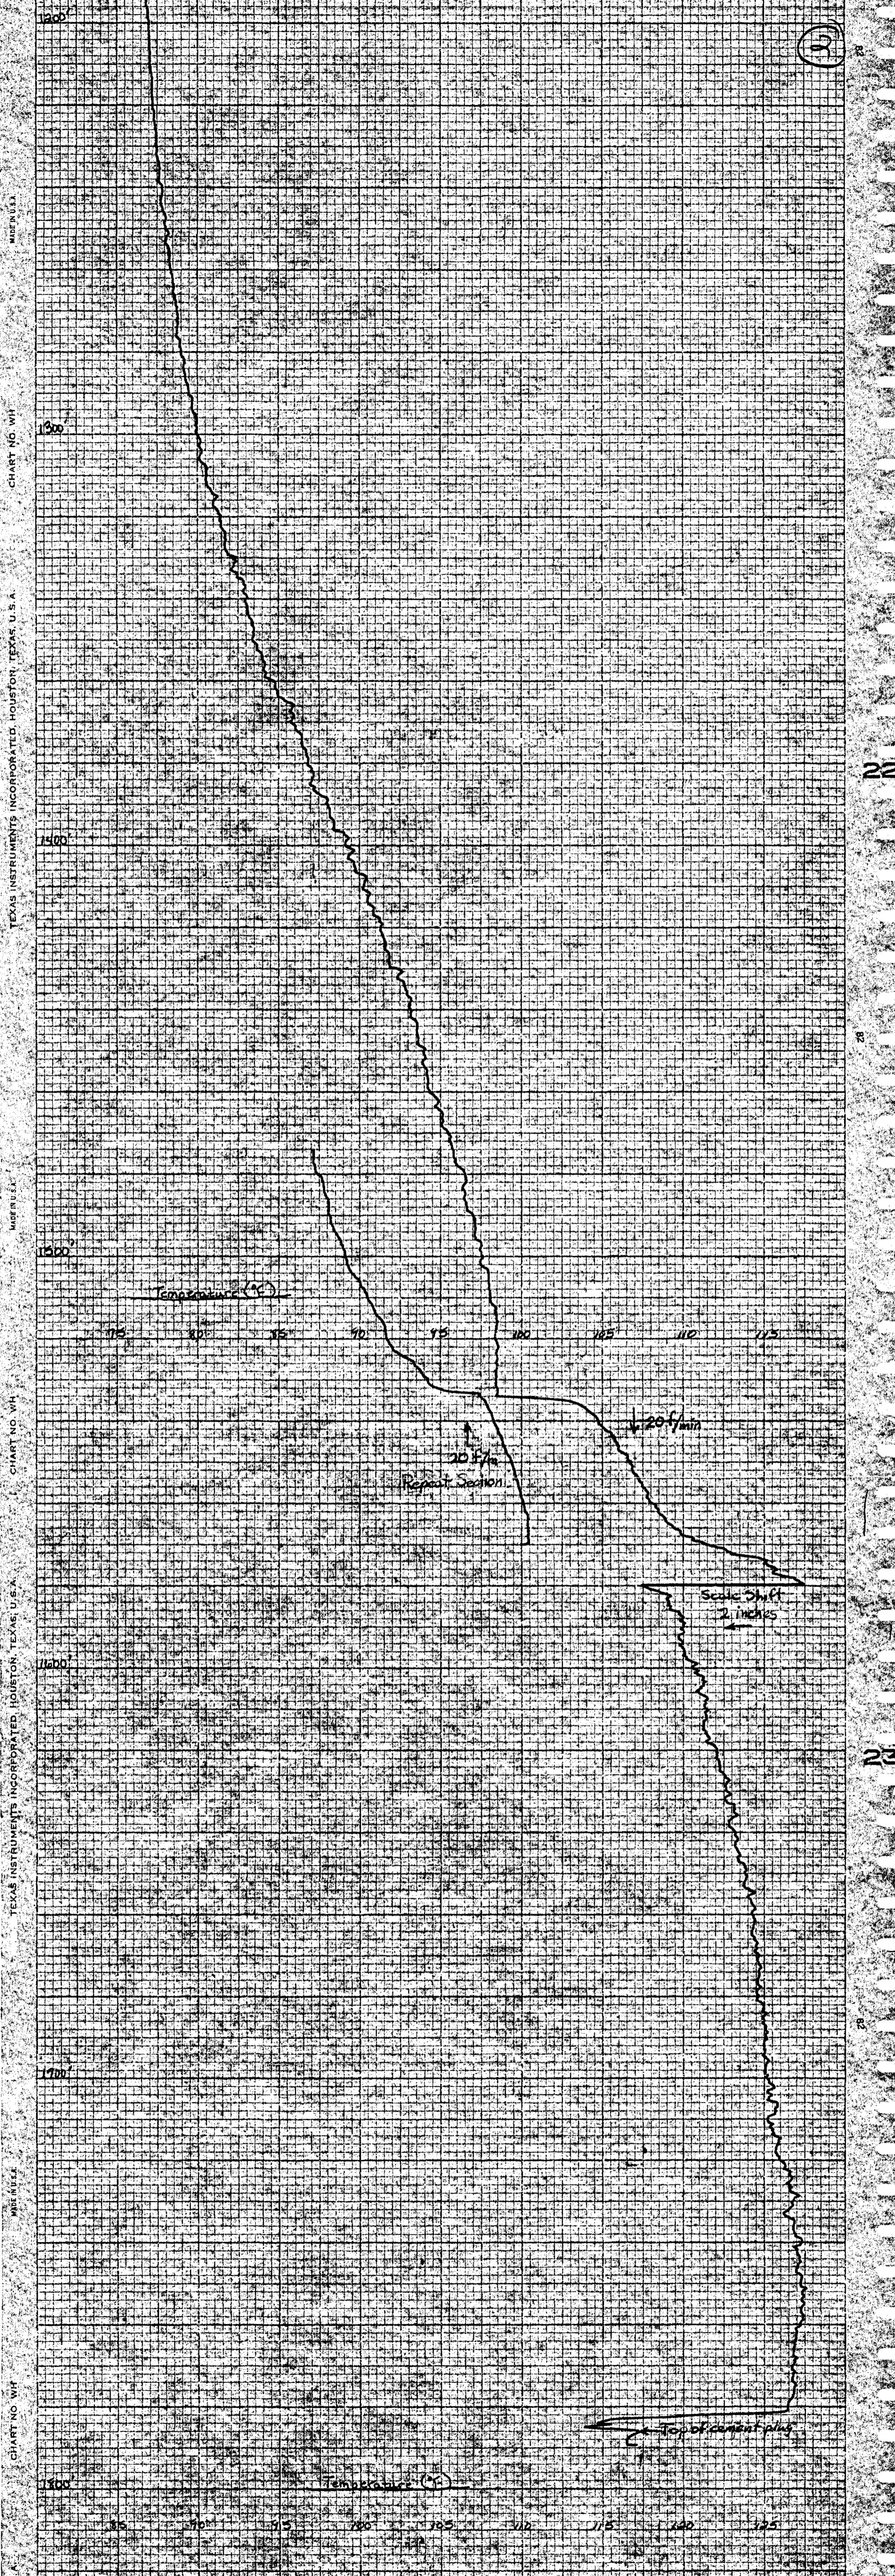

U.S.A. CHART NO. WH MADE IN U.S.A. TEXAS INSTRUMENTS INCORPORATED, HOUSTON, TEXAS, U.S.A. CHART NO. WH

22 23 24