

692898



PUMPING TEMPERATURE FLUID RESISITIVITY

FLORIDAN MONITOR WELL

TEXAS INSTRUMENTS INCORPORATED, HOUSTON, TEXAS, U.S.A. CHART NO. WO

898

COMPANY : DIVERSIFIED DRILLING
 WELL : FLORIDAN MONITOR WELL
 LOCATION/FIELD : WEST PALM BEACH WTP
 COUNTY : PALM BEACH
 STATE : FLORIDA
 SECTION :

OTHER SERVICES:
 FLOW
 CALIPER

TOWNSHIP : RANGE :

DATE : 09/02/96
 DEPTH DRILLER : 1190
 LOG BOTTOM : 1196.10
 LOG TOP : 843.30
 CASING DRILLER : 975
 CASING TYPE : STEEL
 CASING THICKNESS : .375

PERMANENT DATUM : PL
 ELEV. PERM. DATUM: N/A
 LOG MEASURED FROM: PL
 DRL MEASURED FROM: PL
 LOGGING UNIT : 1
 FIELD OFFICE : DFB
 RECORDED BY : M. SCHILLING


ELEVATIONS
 KB : N/A
 DF : N/A
 GL : N/A

BIT SIZE : 11
 MAGNETIC DECL. :
 MATRIX DENSITY :
 FLUID DENSITY :
 NEUTRON MATRIX :
 REMARKS :

BOREHOLE FLUID : WATER
 RM :
 RM TEMPERATURE :
 MATRIX DELTA T :
 FLUID DELTA T :

FILE : ORIGINAL
 TYPE : 9041A
 LOG : 2
 PLOT : MARK 4
 THRESH:

OBSERVER: MURDOCK MONROE - BARNES, FERLAND & ASSOCIATES
 LOGGED ON WELL BEING PUMPED AT 585 GPM
 ALL SERVICES PROVIDED SUBJECT TO STANDARD TERMS AND CONDITIONS

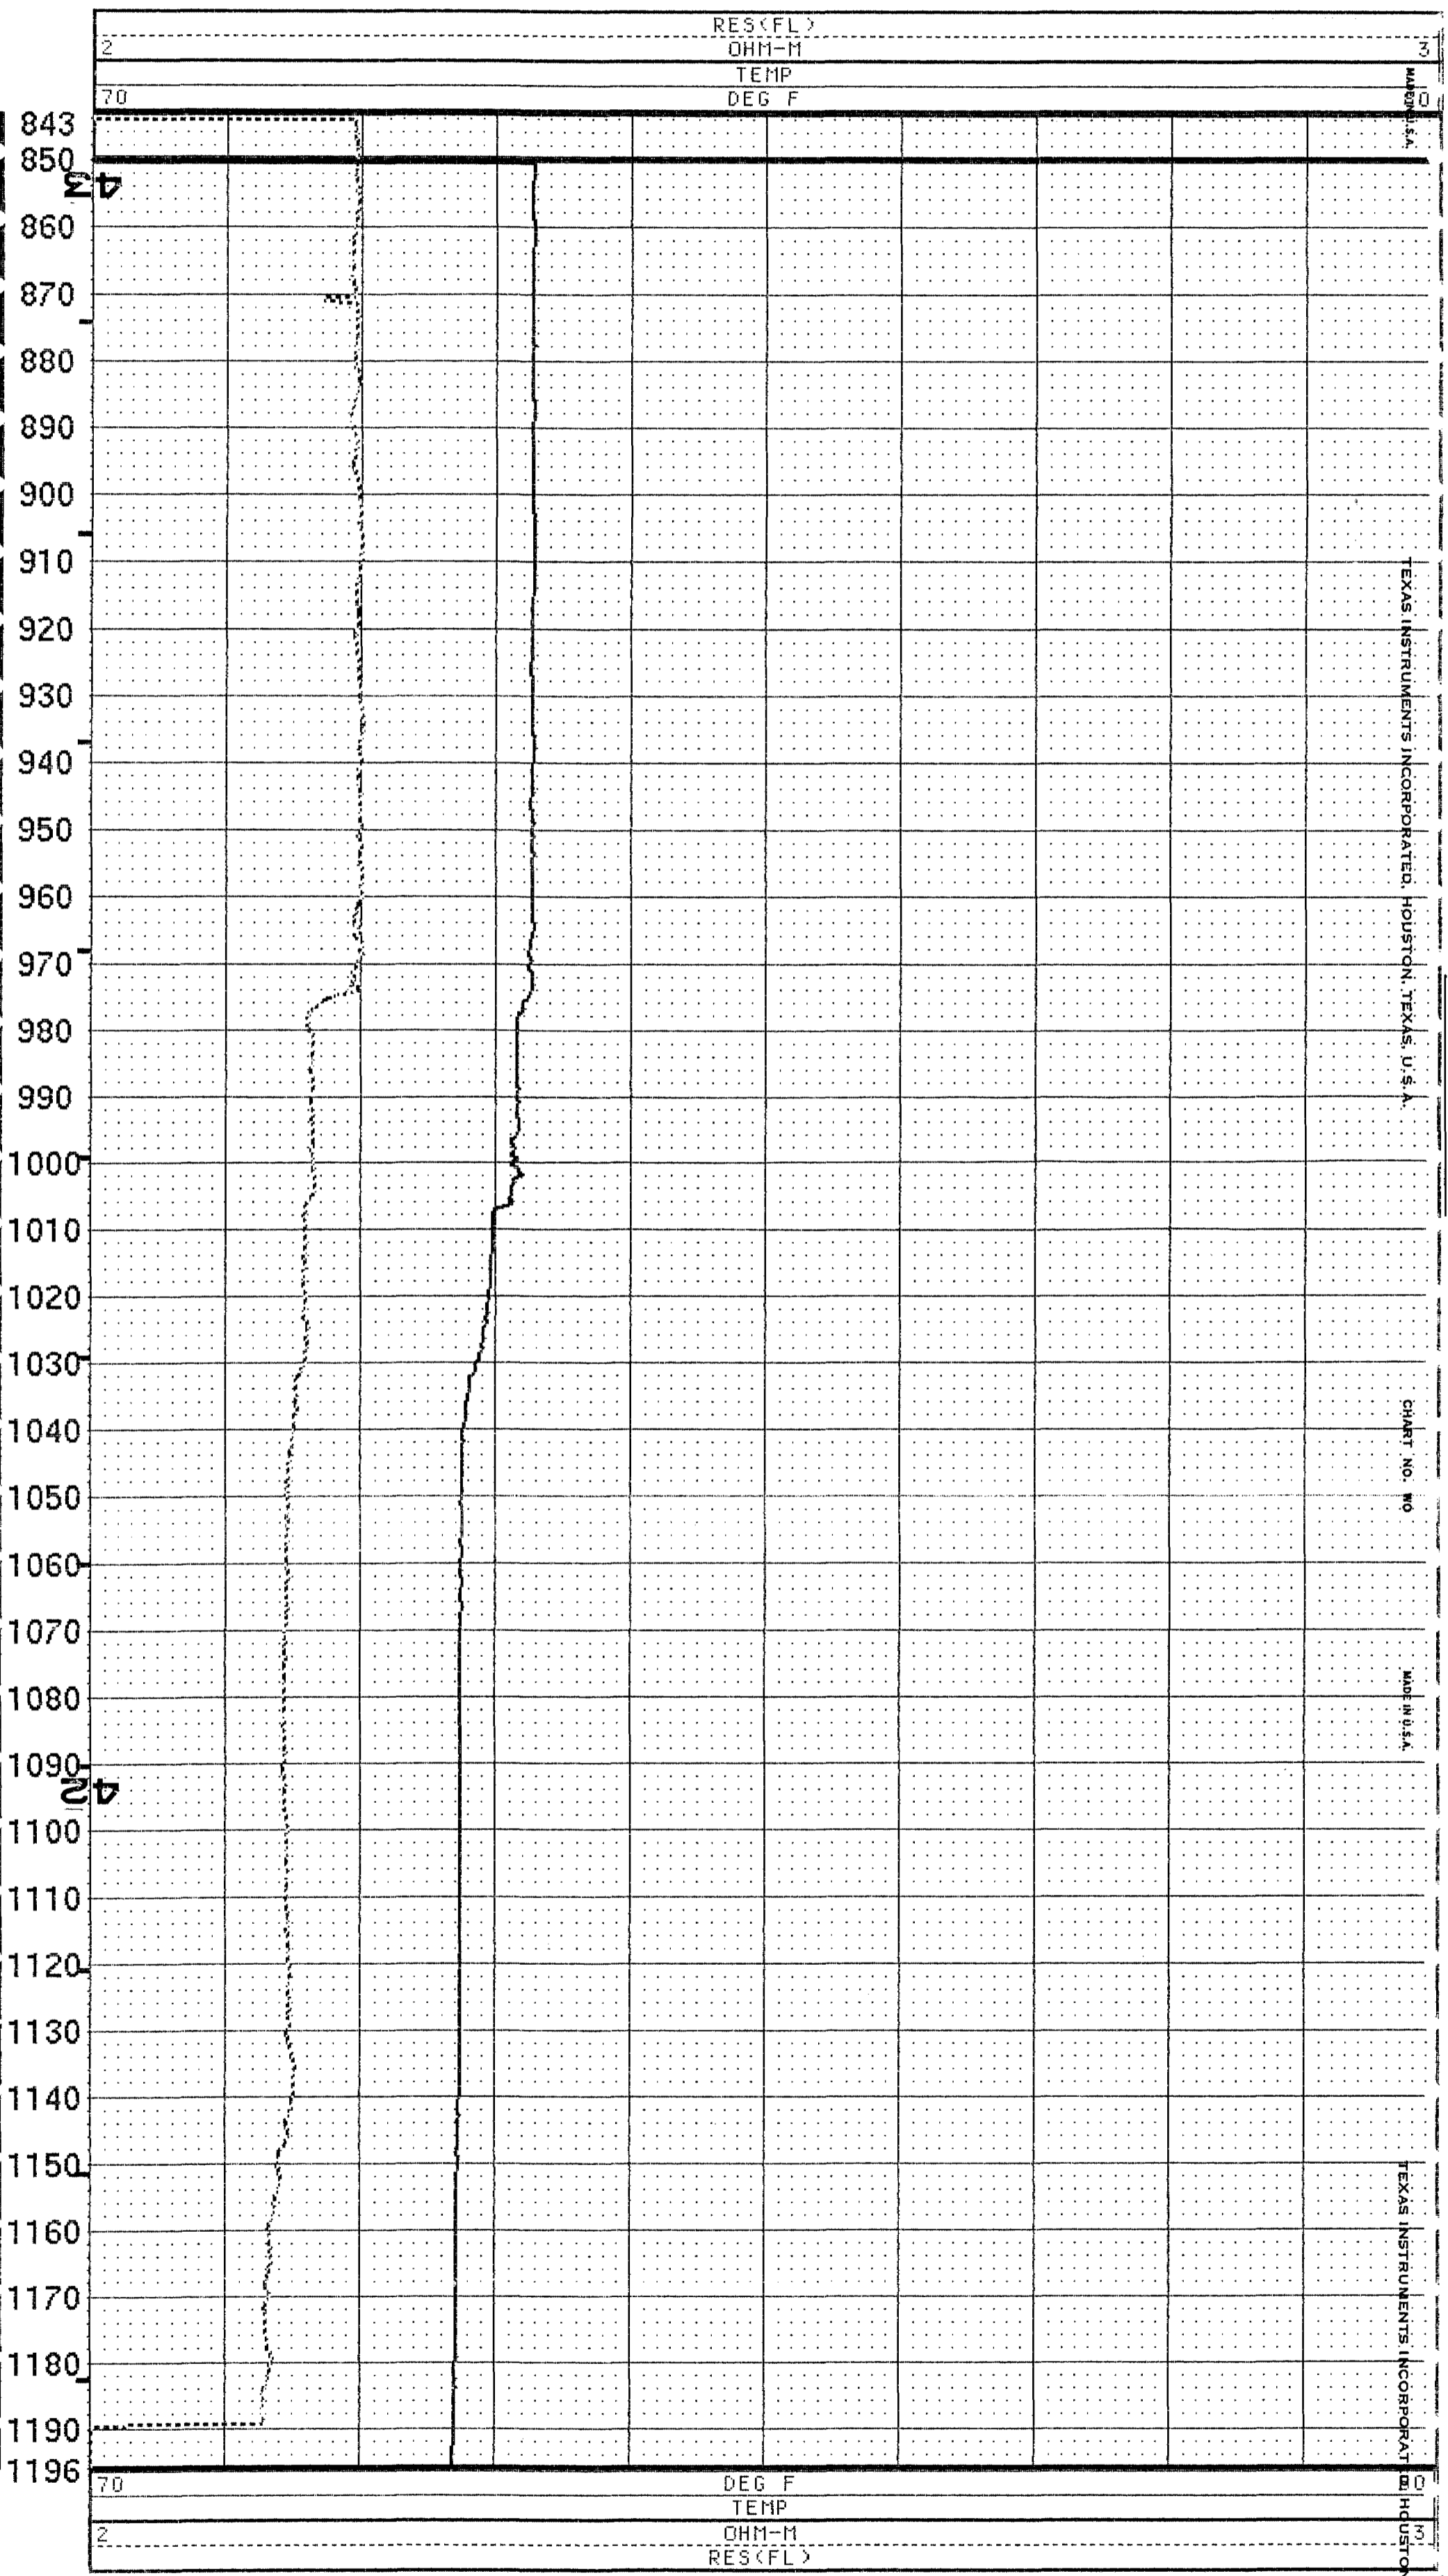

REPEAT SECTION

