

696112

1

0050-0046

Sheet 6 of 6



CLIENT Pratt & Whitney Aircraft Date 11/2/84  
 Well No. Injection Well Project No. FC17623.B2

Location: State Florida County Palm Beach  
 \_\_\_\_\_ 1/4 \_\_\_\_\_ 1/4 SE \_\_\_\_\_ 1/4 Sec. 14 T. 41 \_\_\_\_\_  
 N  S R 40  E  W  
 Logged by R. Petersen Observer \_\_\_\_\_

Owner: Pratt & Whitney Aircraft  
 Well: Injection Well  
 Driller: Alsay-Pippin Date Drilled: Nov 1984

Surface Elevation: 25 ft.  Estimated  Measured Above MSL  
 T.D. Logger: 1,870' T.D. Driller: 1,872'  
 Hole Dia. 14-3/4" to 1,872'  
 Casing Dia. 30" to 970'

Finish:  Open hole  Screen  Gravel  Other  
 Water Level: \_\_\_\_\_ ft.  Above MP, At  Above  Below  Below  Surface Pad Surface  
 Yield: Flow \_\_\_\_\_ gpm Pump \_\_\_\_\_ gpm  
 Drawdown: \_\_\_\_\_ ft. after \_\_\_\_\_ hours pumping @ \_\_\_\_\_ gpm  
 Use:  Dom.  Stock  PS  Ind.  Irr.  Test  
 Heating or cooling  Drainage  Disposal  Oils.

Water Quality:  
 Temp. \_\_\_\_\_ °F; Sp. Cond. \_\_\_\_\_; Iron \_\_\_\_\_ ppm  
 Cl<sup>-</sup> \_\_\_\_\_ ppm; SO<sub>4</sub> \_\_\_\_\_ ppm; Total Hardness \_\_\_\_\_ ppm  
 Color \_\_\_\_\_ Odor \_\_\_\_\_ Taste \_\_\_\_\_

Electric  16" Normal  Caliper  
 64" Normal  Fluid Resistivity  
 Single Point  Fluid Velocity  
 S.P.  Gamma Ray  Temperature

Log Scales

Electric Log SP 40 millivolts/inch Fluid Resistivity See Log ohm meters/inch  
 Res. 20 ohm meters/inch @ 82 °F  
 Res. \_\_\_\_\_ ohms/inch

Gamma Ray Log \_\_\_\_\_ Counts/sec/inch Fluid Velocity \_\_\_\_\_ Counts/min/inch  
 Time Constant 4 sec. \_\_\_\_\_ FPM Continuous  
 Logging speed 30 FPM Q = \_\_\_\_\_ gpm


Temperature \_\_\_\_\_ °F to \_\_\_\_\_ °F Caliper \_\_\_\_\_ inches to \_\_\_\_\_ inches  
 Logging speed \_\_\_\_\_ FPM Logging speed 35 FPM

Water Samples  
 Depths sampled: \_\_\_\_\_

CH2M HILL  
 Water Resources Division  
 P.O. Box 1647  
 Gainesville, Florida 32602  
 904/377-2442


GEOPHYSICAL WELL SURVEY

Remarks: \_\_\_\_\_

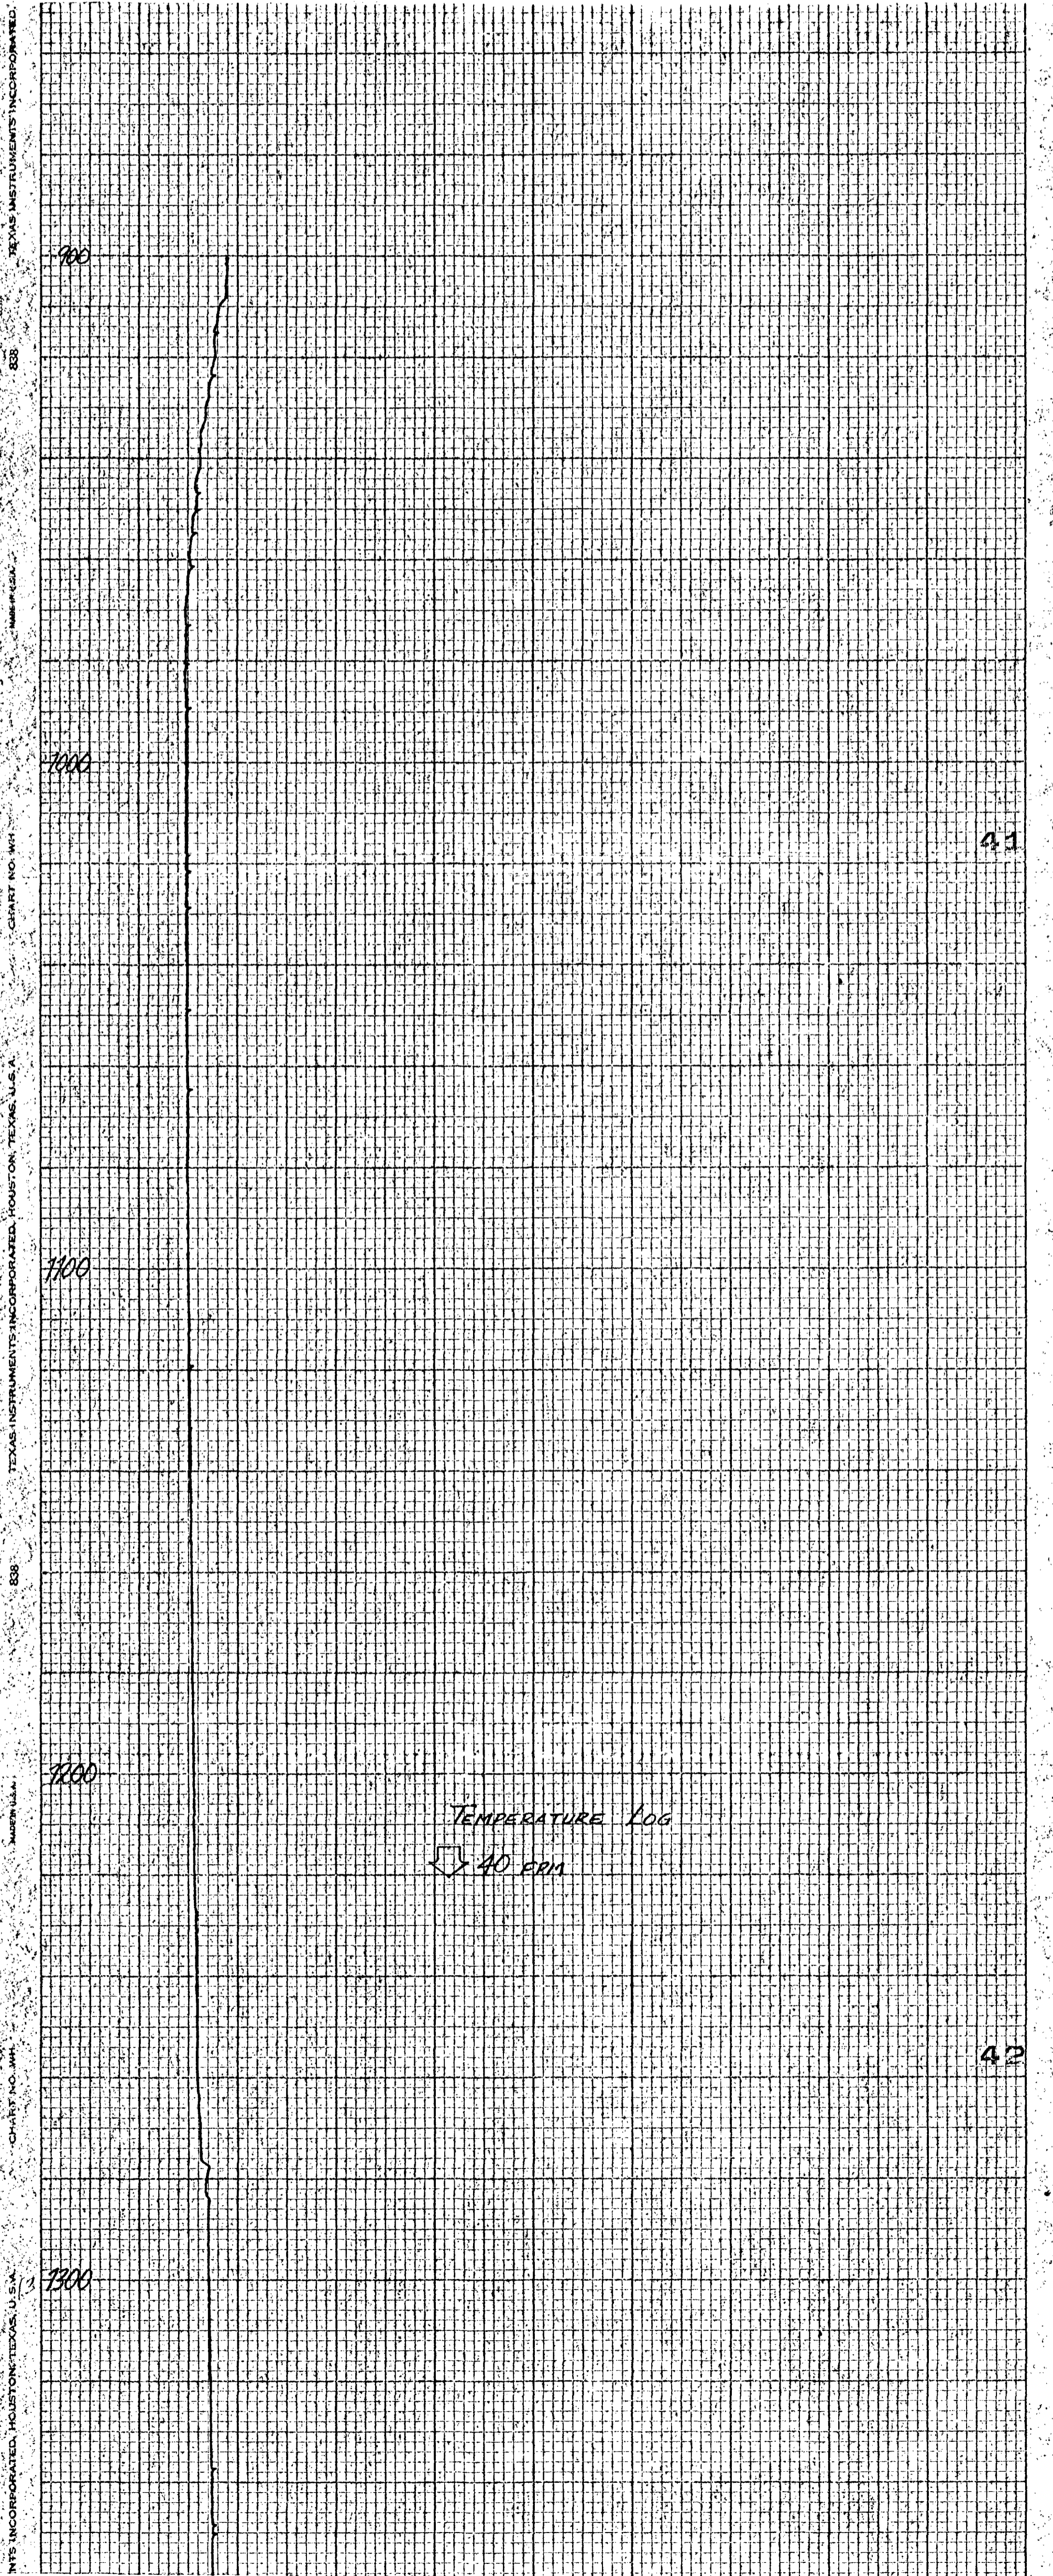

TEXAS INSTRUMENTS INCORPORATED HOUSTON TEXAS U.S.A. CHART NO. WH-838

4

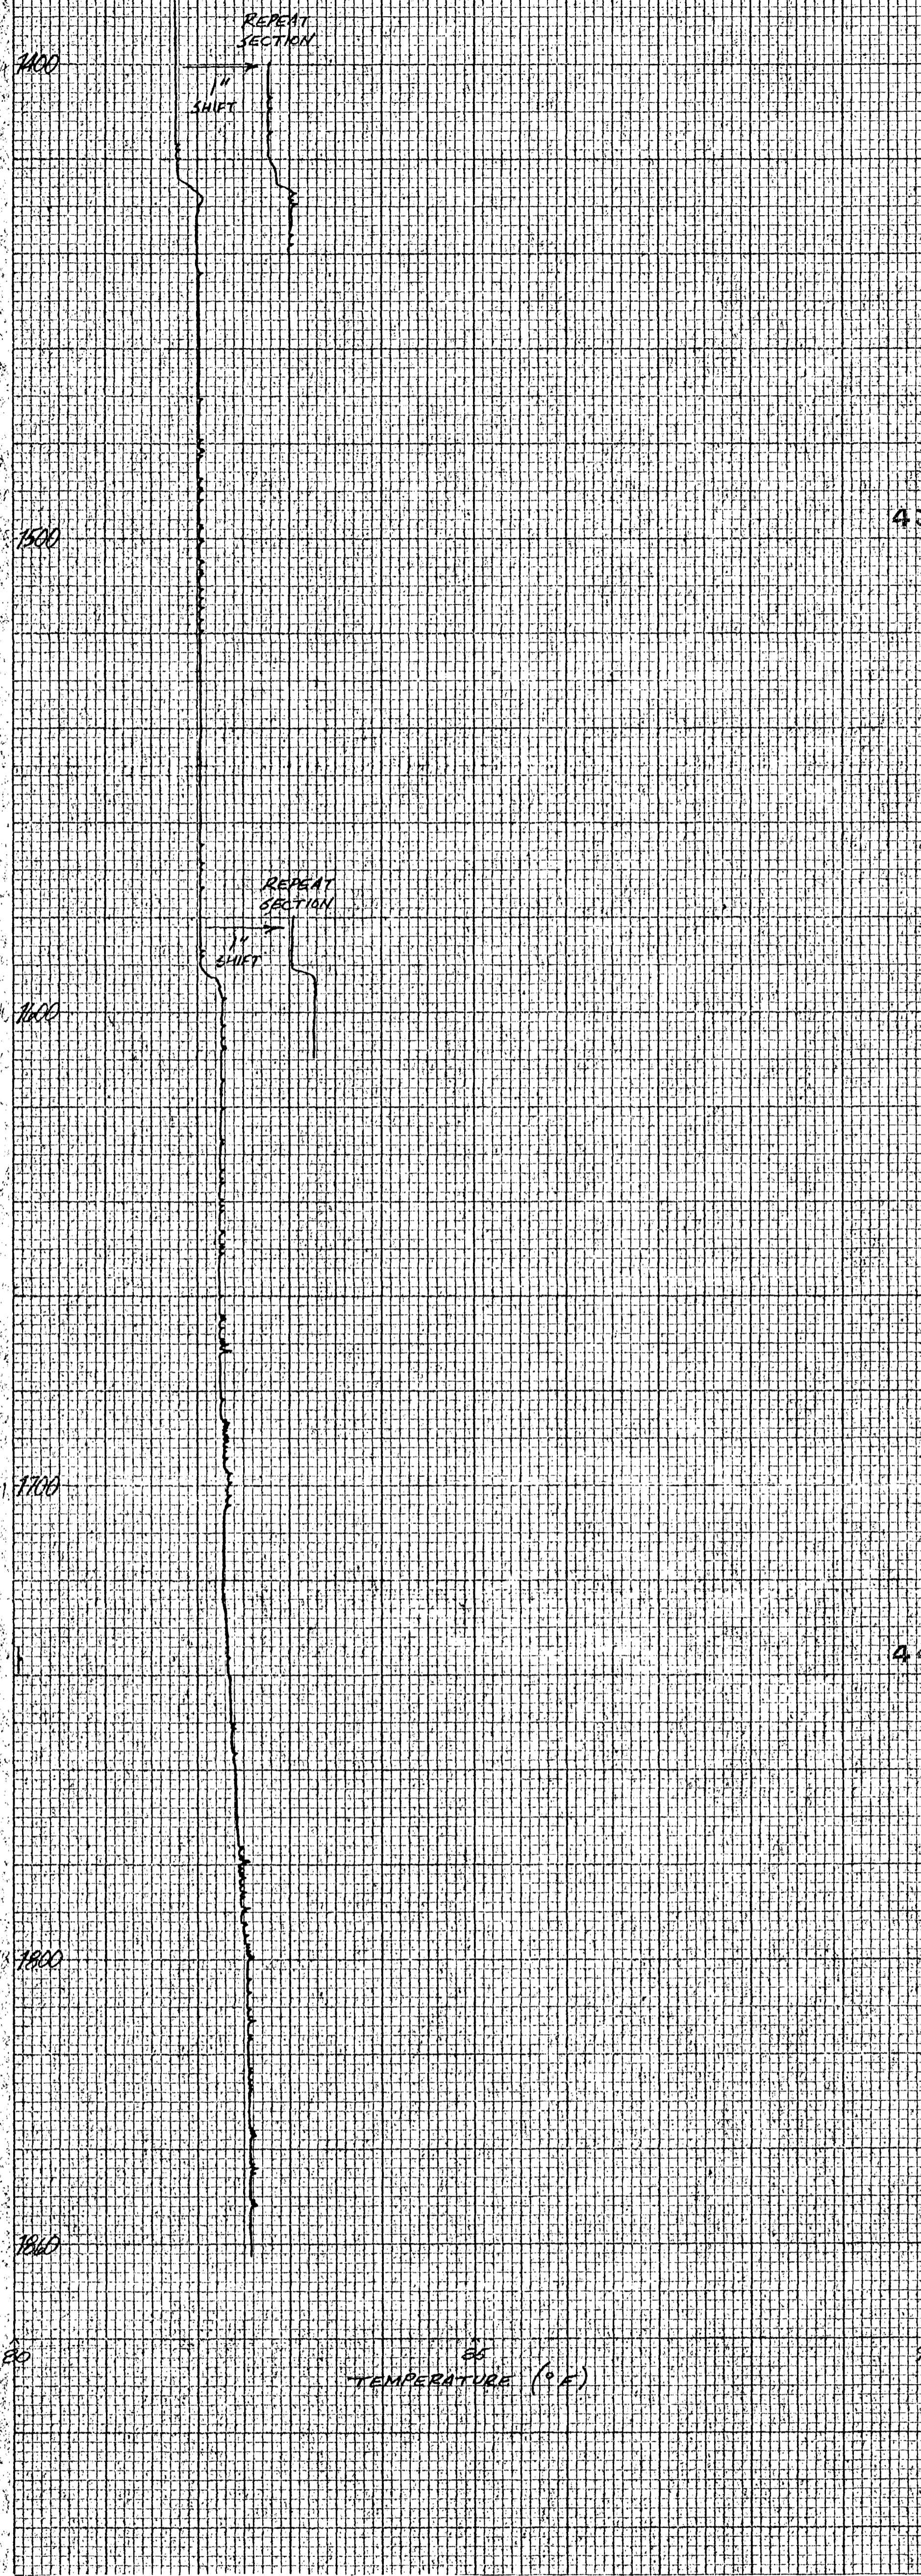

7100

REPEAT SECTION  
1/2" SHIFT

7500

43

REPEAT SECTION

1/2" SHIFT

7600

7700

44

7800

7860

80

TEMPERATURE (°F)

90