

Schlumberger

TEMPERATURE LOG

COUNTY	LEE		
FIELD	N. FT. MYERS		
LOCATION	N FT. MYERS UTILITY IW		
WELL	N FT. MYERS UTILITY IW		
COMPANY	DRILLERS INC.		
Permanent Datum	PAD LEVEL	Elev.	Elev. K.B.
Log Measured From	PAD LEVEL		D.F.
Drilling Measured From	PAD LEVEL		Q.L.
Date	19-NOV-87		
Run No.	5		
Depth Driller	2340.0 F		
Depth Logger (Sohl.)	2279.0 F		
Btm. Log Interval	2279.0 F		
Top Log Interval	40.0 F		
Casing-Driller	12.78	20	1880.0 F
Casing-Logger			
Bit Size	24 30		
Type Fluid In Hole	FRESH WATER		
Dens.	Visc.		
PH	Fld. Loss		
Source of Sample			
Rm @ Meas. Temp.	⊙		
Rmf @ Meas. Temp.	⊙		
Rmo @ Meas. Temp.	⊙		
Source: Rmf/ Rmo	⊙		
Rm @ BHT	⊙		
Rotation Ended			
Logger on Bottom	1300		
Max. Rec. Temp.			
Equip. Location	8193 FT MYERS		
Recorded By	BUCHTEL		
Witnessed By	PITT FRATARCANGELI		

FOLD HERE - The well name, location and borehole reference data were furnished by the customer.

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretations made by any of our officers, agents or employees. These interpretations are also subject to Clause 4 of our General Terms and Conditions as set out in our current Price Schedule.

Run No.	5
Service Order No.	
Drilling Fluid Level	
Salinity	
Rmf @ BHT	⊙
Rmo @ BHT	⊙
Logging Speed	3600.0 F/HR
Equipment Data	
Tool Number 1	HTTB
Tool Number 2	HTM 35
Tool Number 3	
Tool Number 4	
Tool Number 5	
Tool Number 6	
Tool Number 7	
Tool Number 8	
Tool Number 9	
Tool Number 10	
Tool Number 11	
Tool Number 12	

REMARKS:

THANK YOU FOR USING SCHLUMBERGER!!!

PARAMETERS

NAME VALUE UNIT
 BS 24.0000 IN

NAME VALUE UNIT
 BHS OPEN

SENSOR MEASURE POINT TO TOOL ZERO

TEMP 1.3 FEET
 CVEL 0.0 FEET
 EXP 0.0 FEET


CCL 6.3 FEET
 TENS 6.3 FEET



0.0	-200.0	-1.000	1.0000
	CVEL(F/MN)		DTEM(DF/F)
0.0	200.00	80.000	100.00
	CVEL(F/MN)		TEMP(DEGF)
-19.00	1.0000		
	CCL		
0.0	150.00		
	TEMP(DEGF)		


CP 27.772


FILE 1

19-NOV-87 13:09

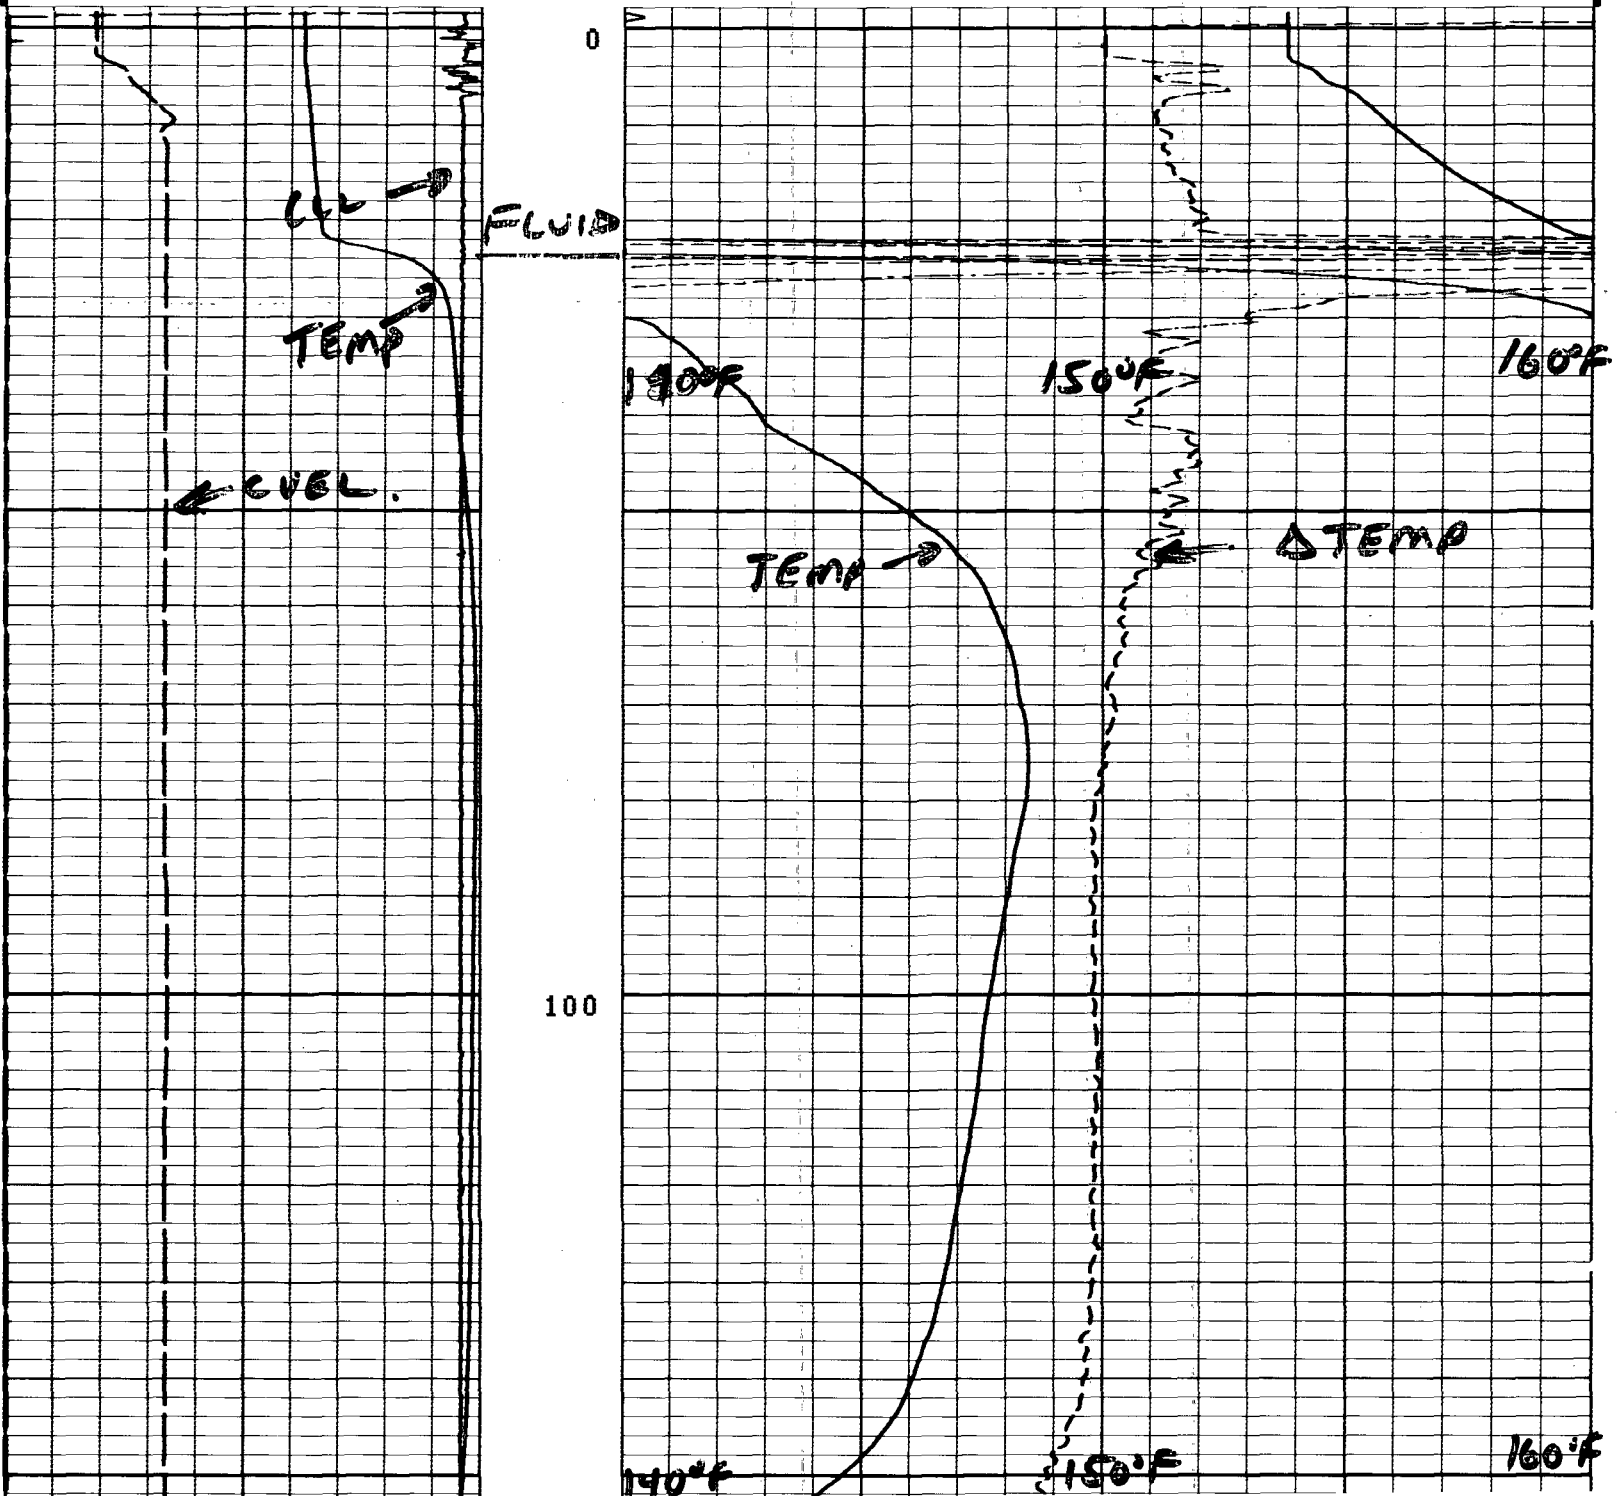

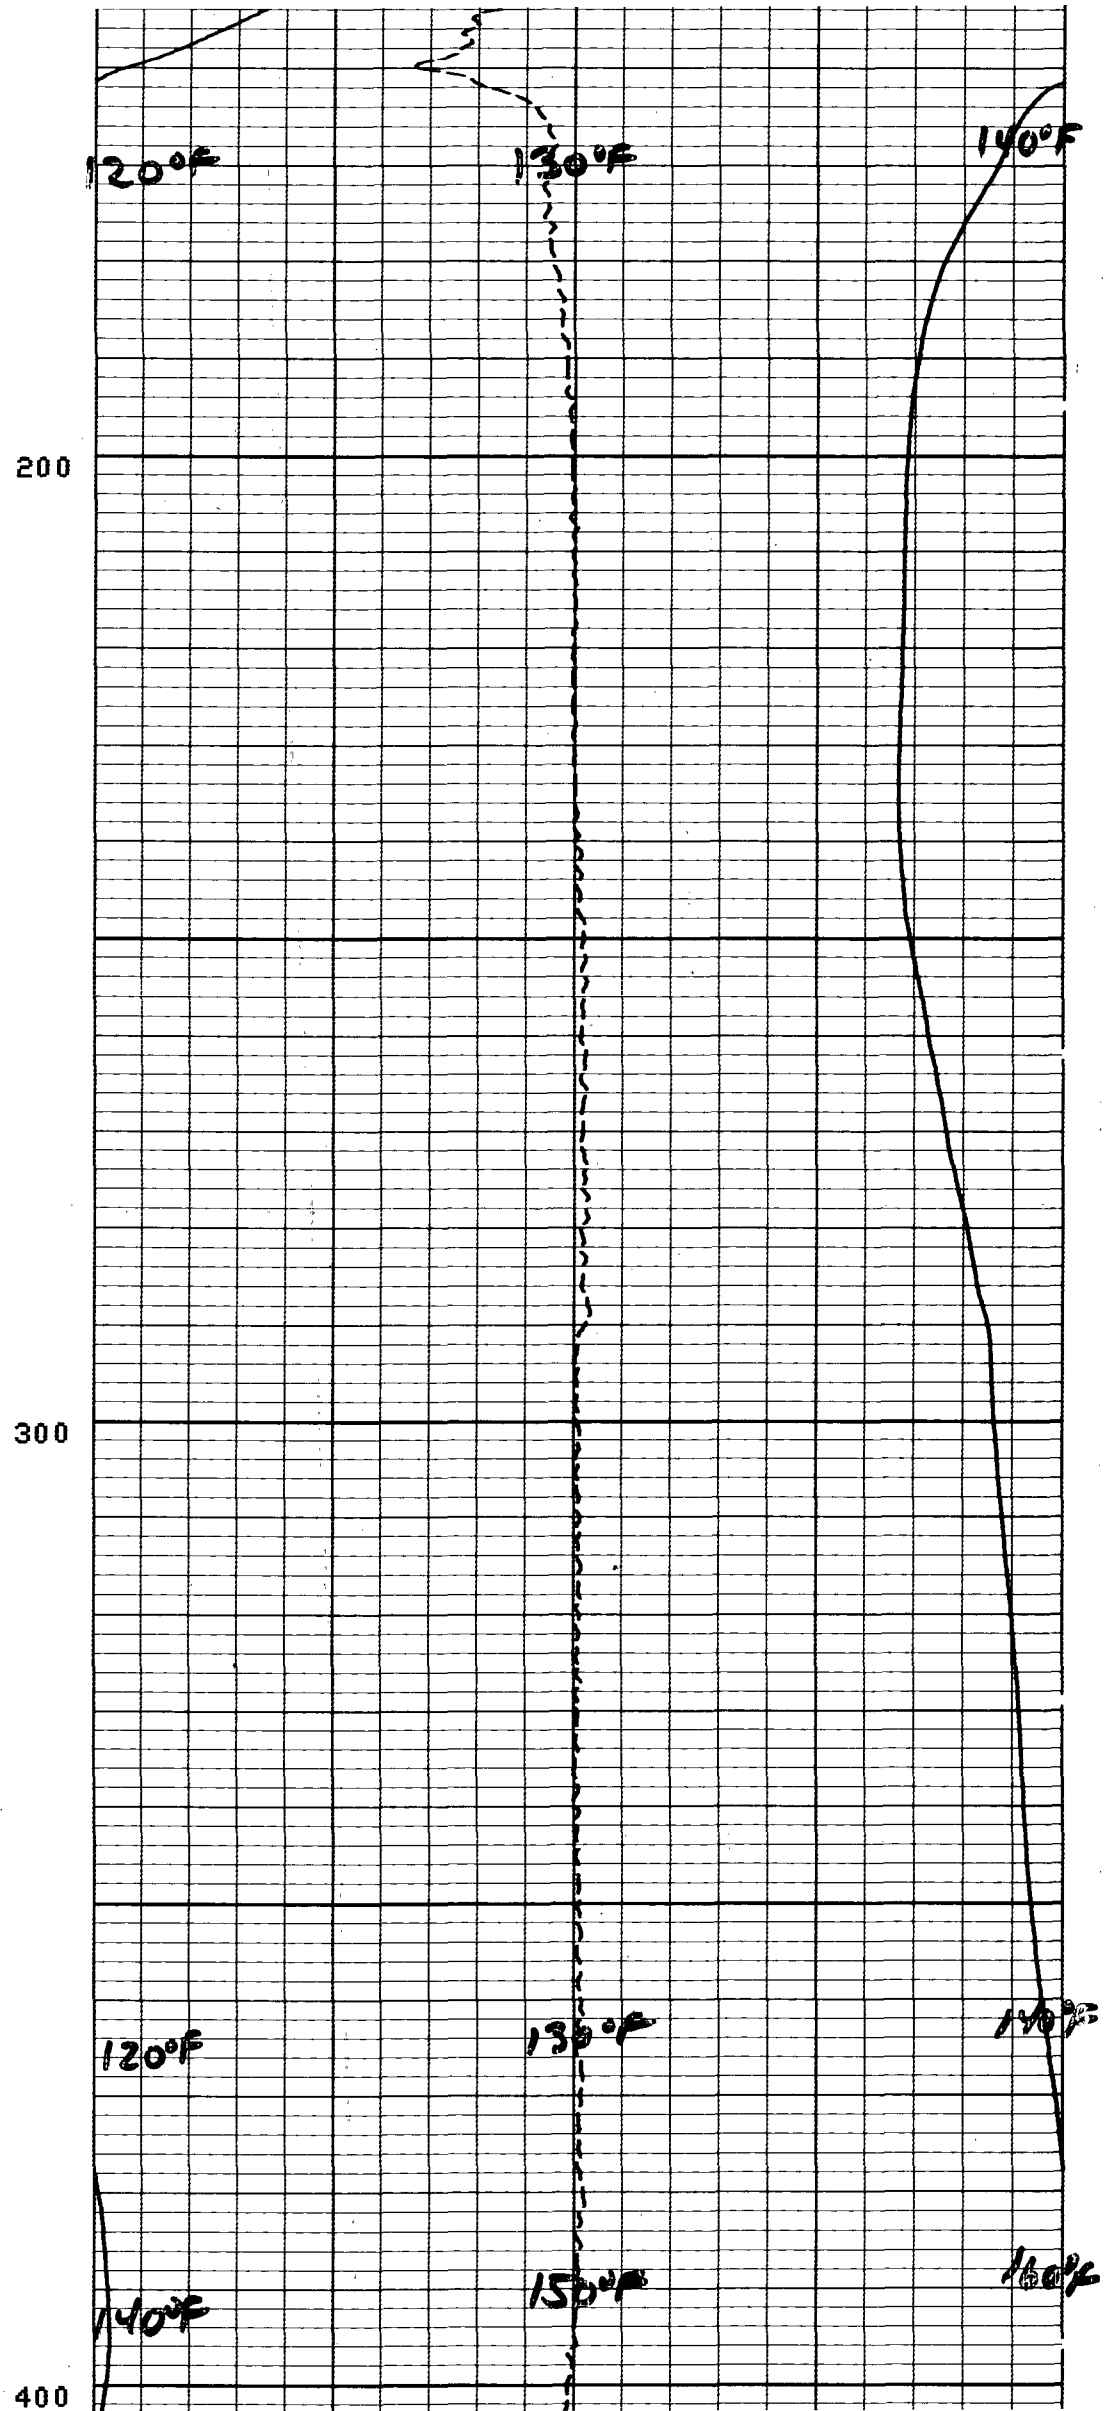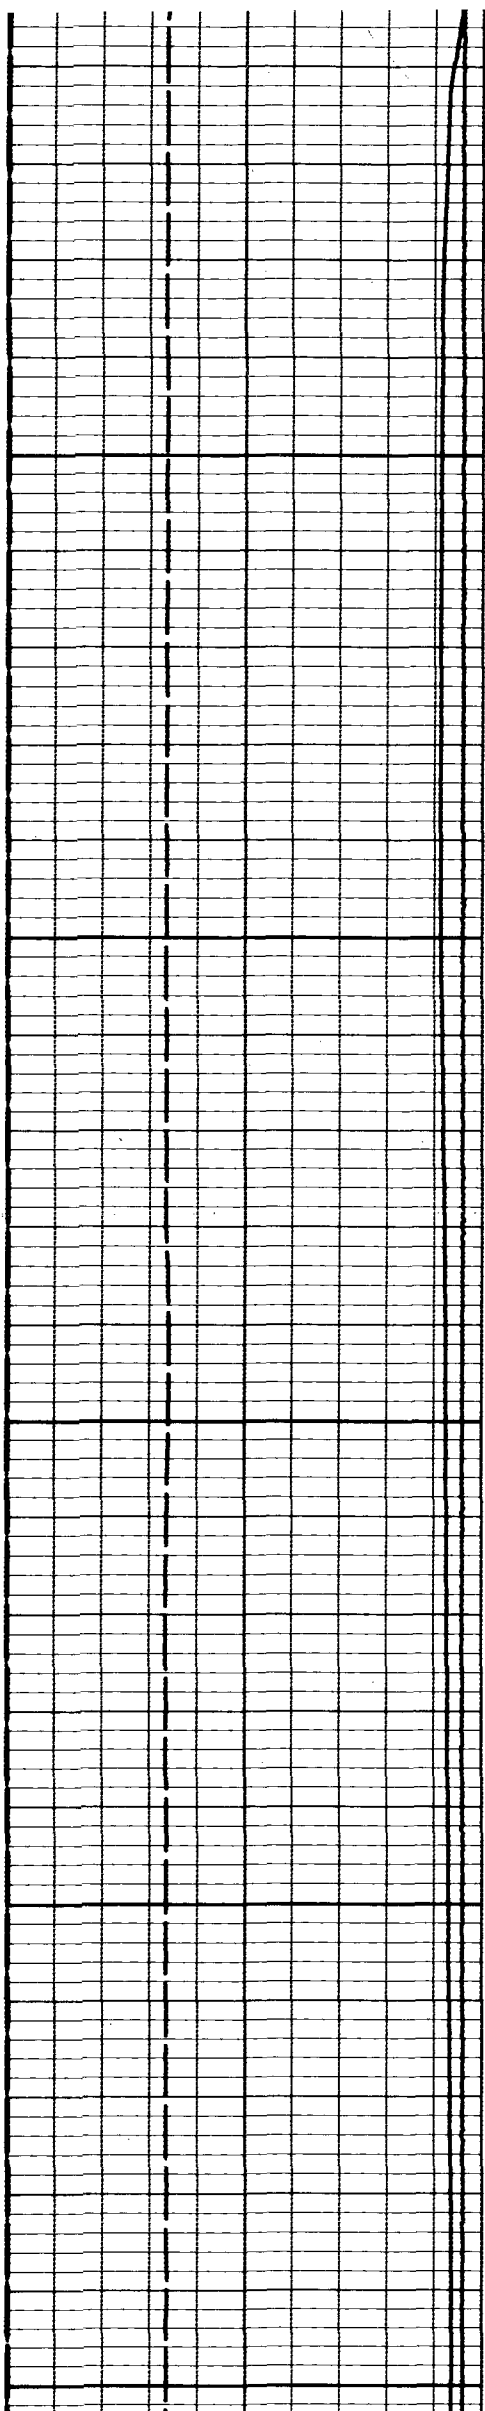

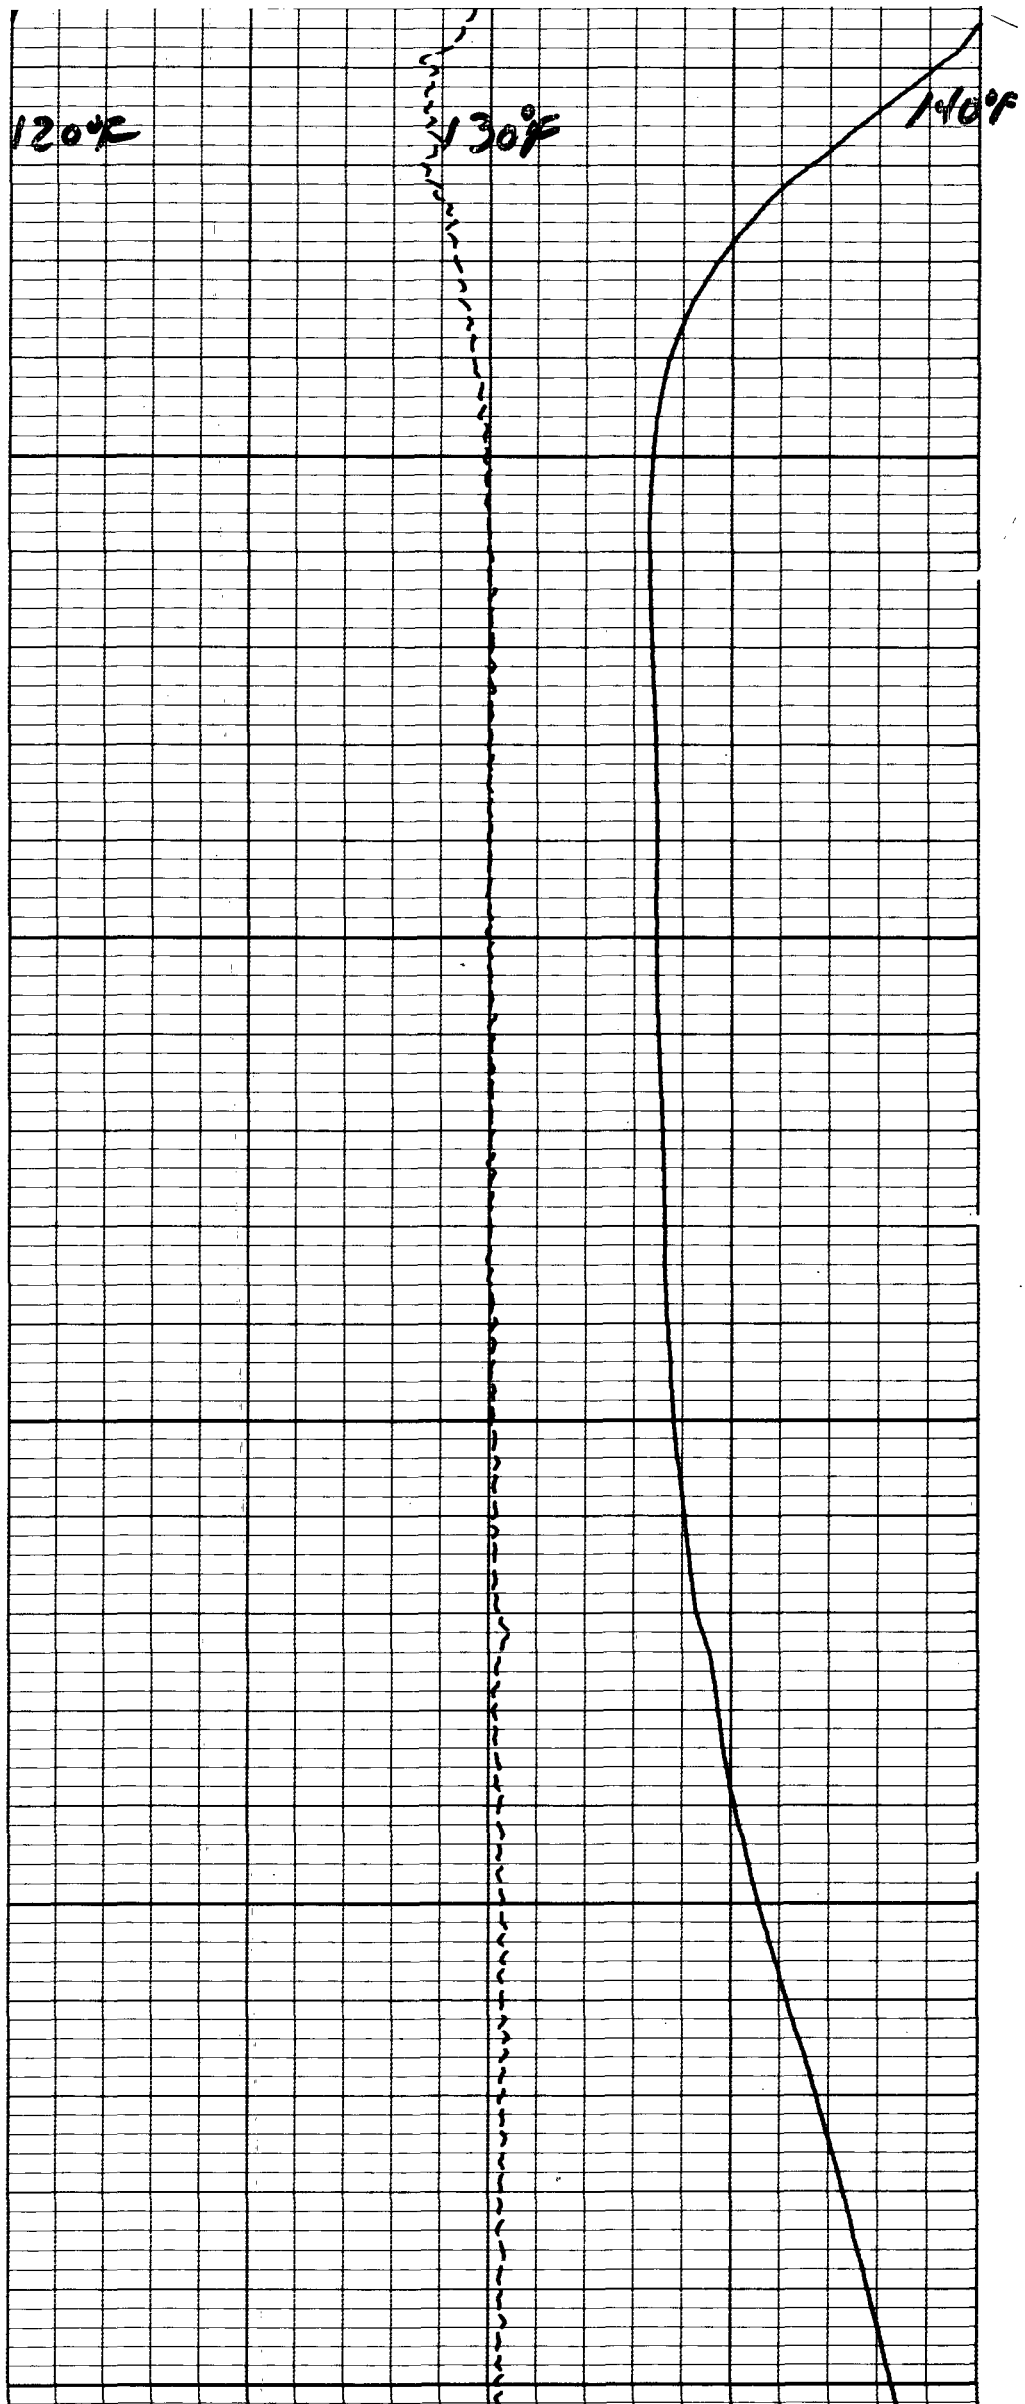

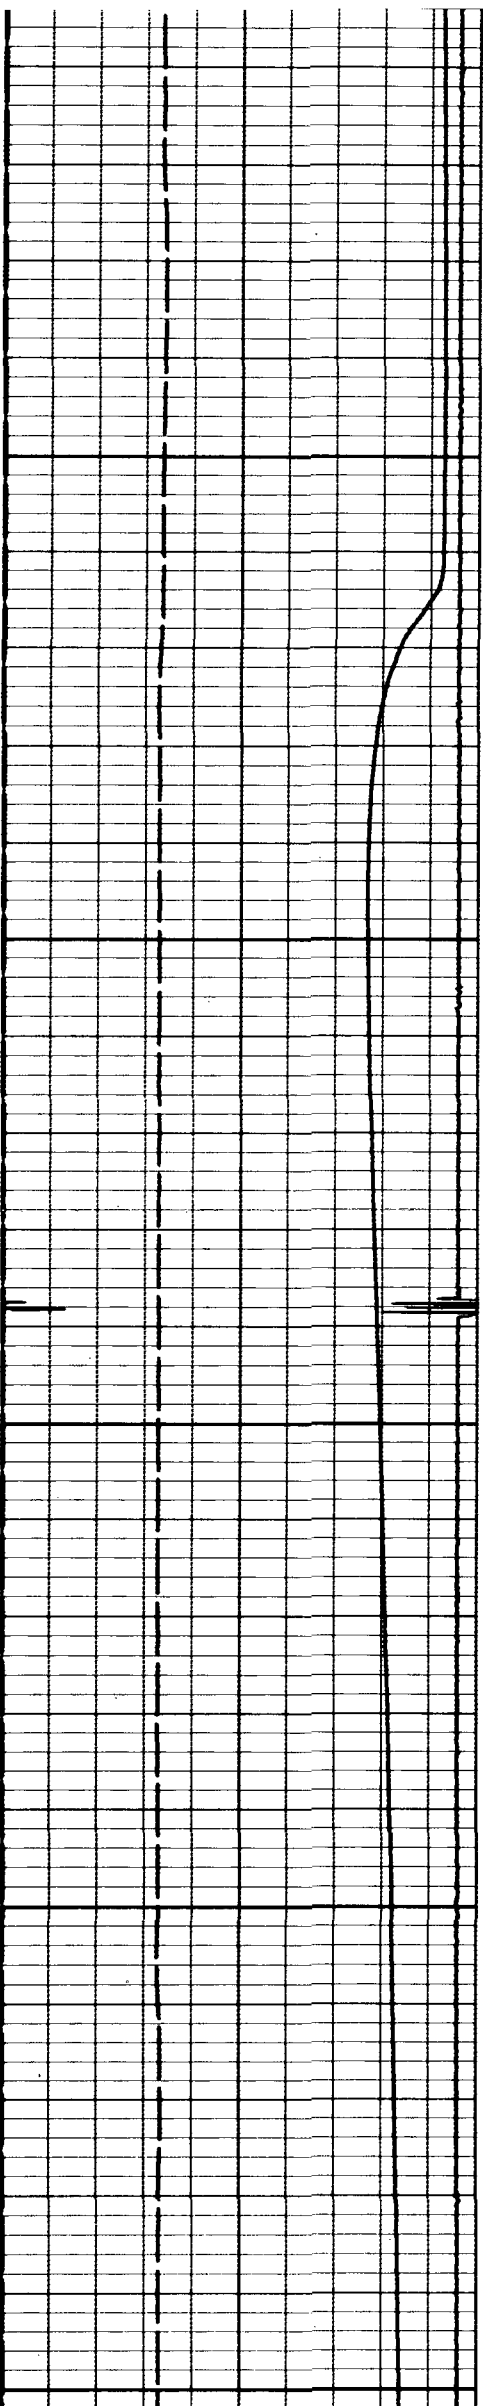

700

120°F

130°F

140°F

100°F

110°F

120°F

800

100°F

110°F

120°F

120°F

130°F


140°F


900





1000

1100

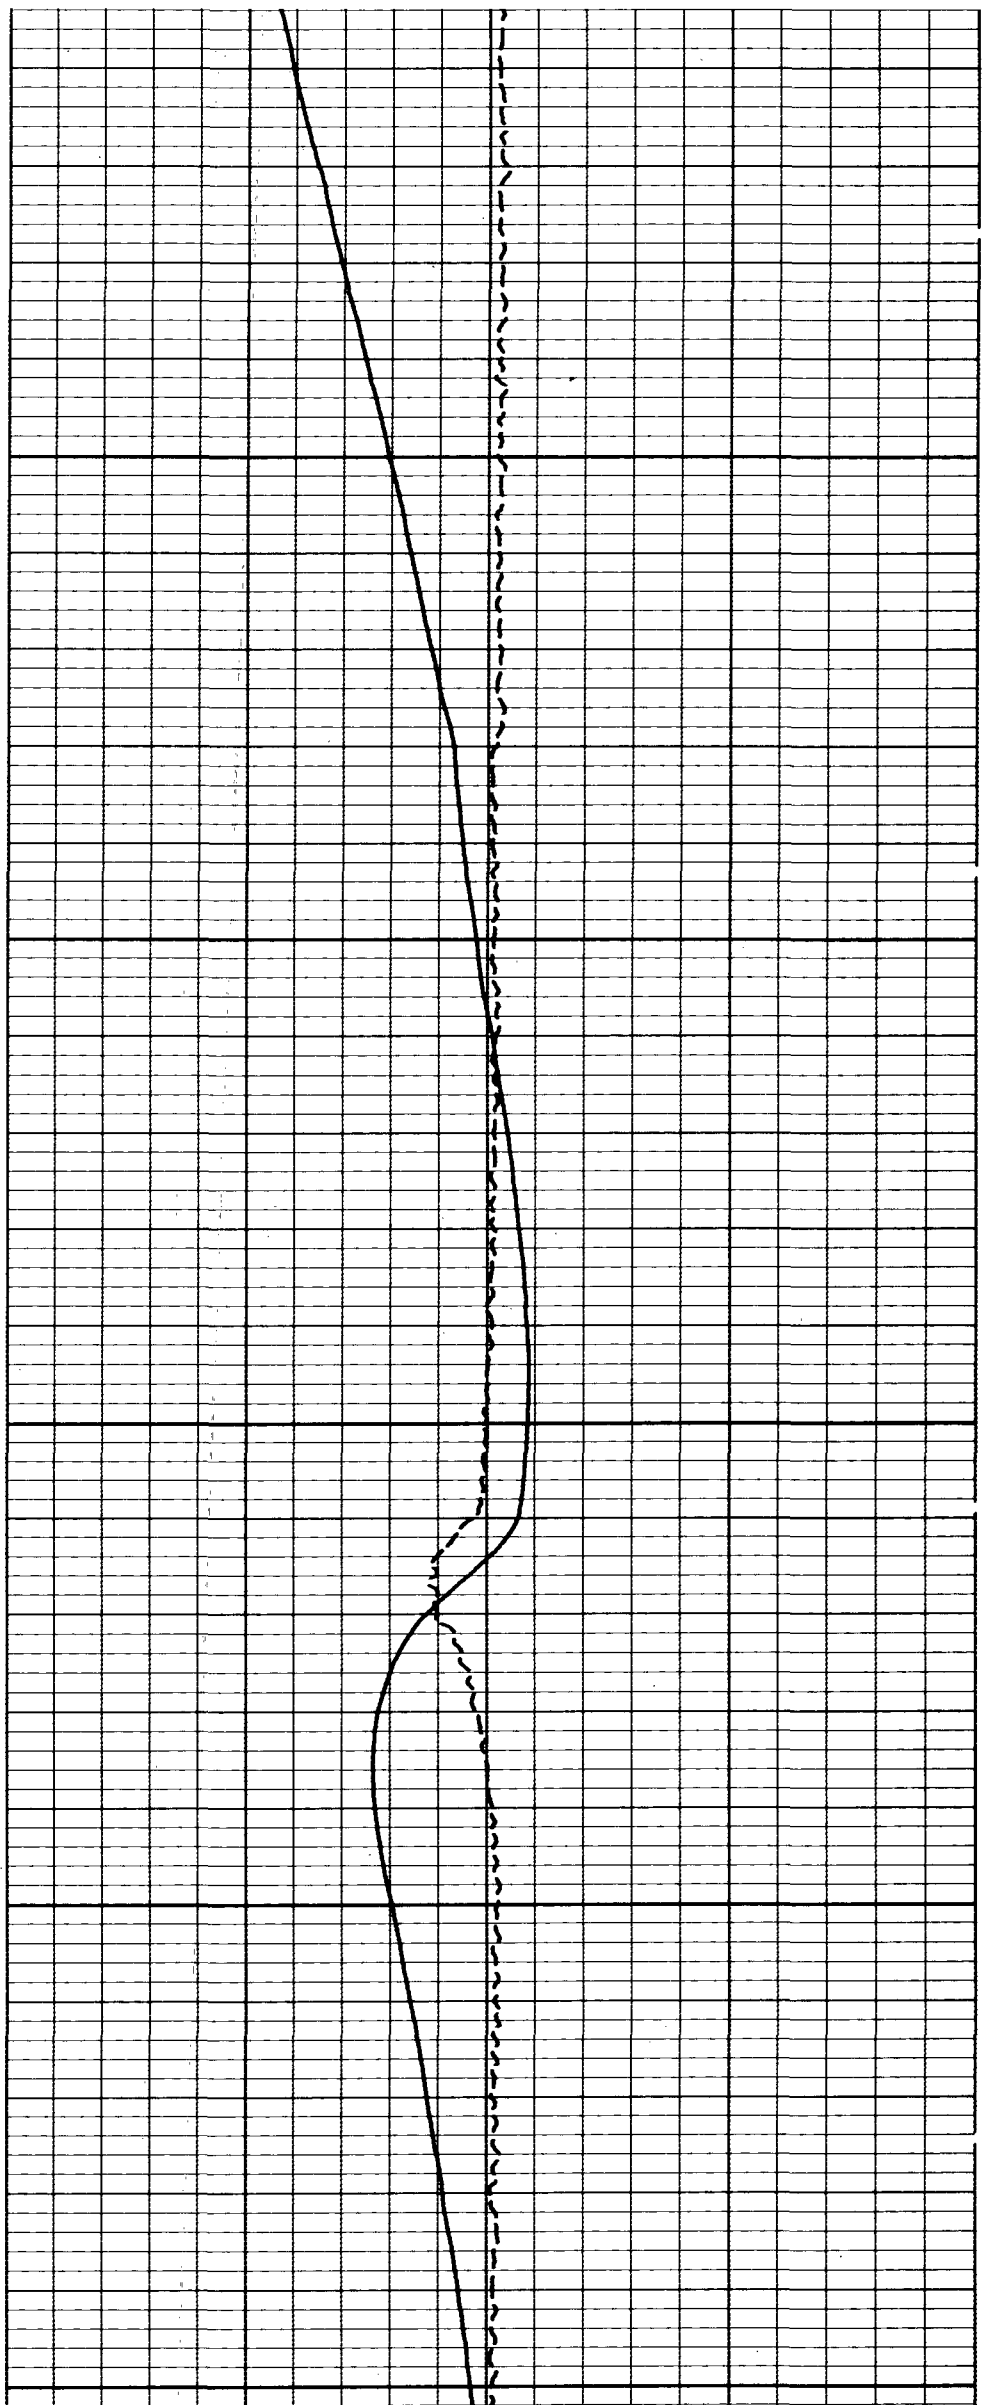

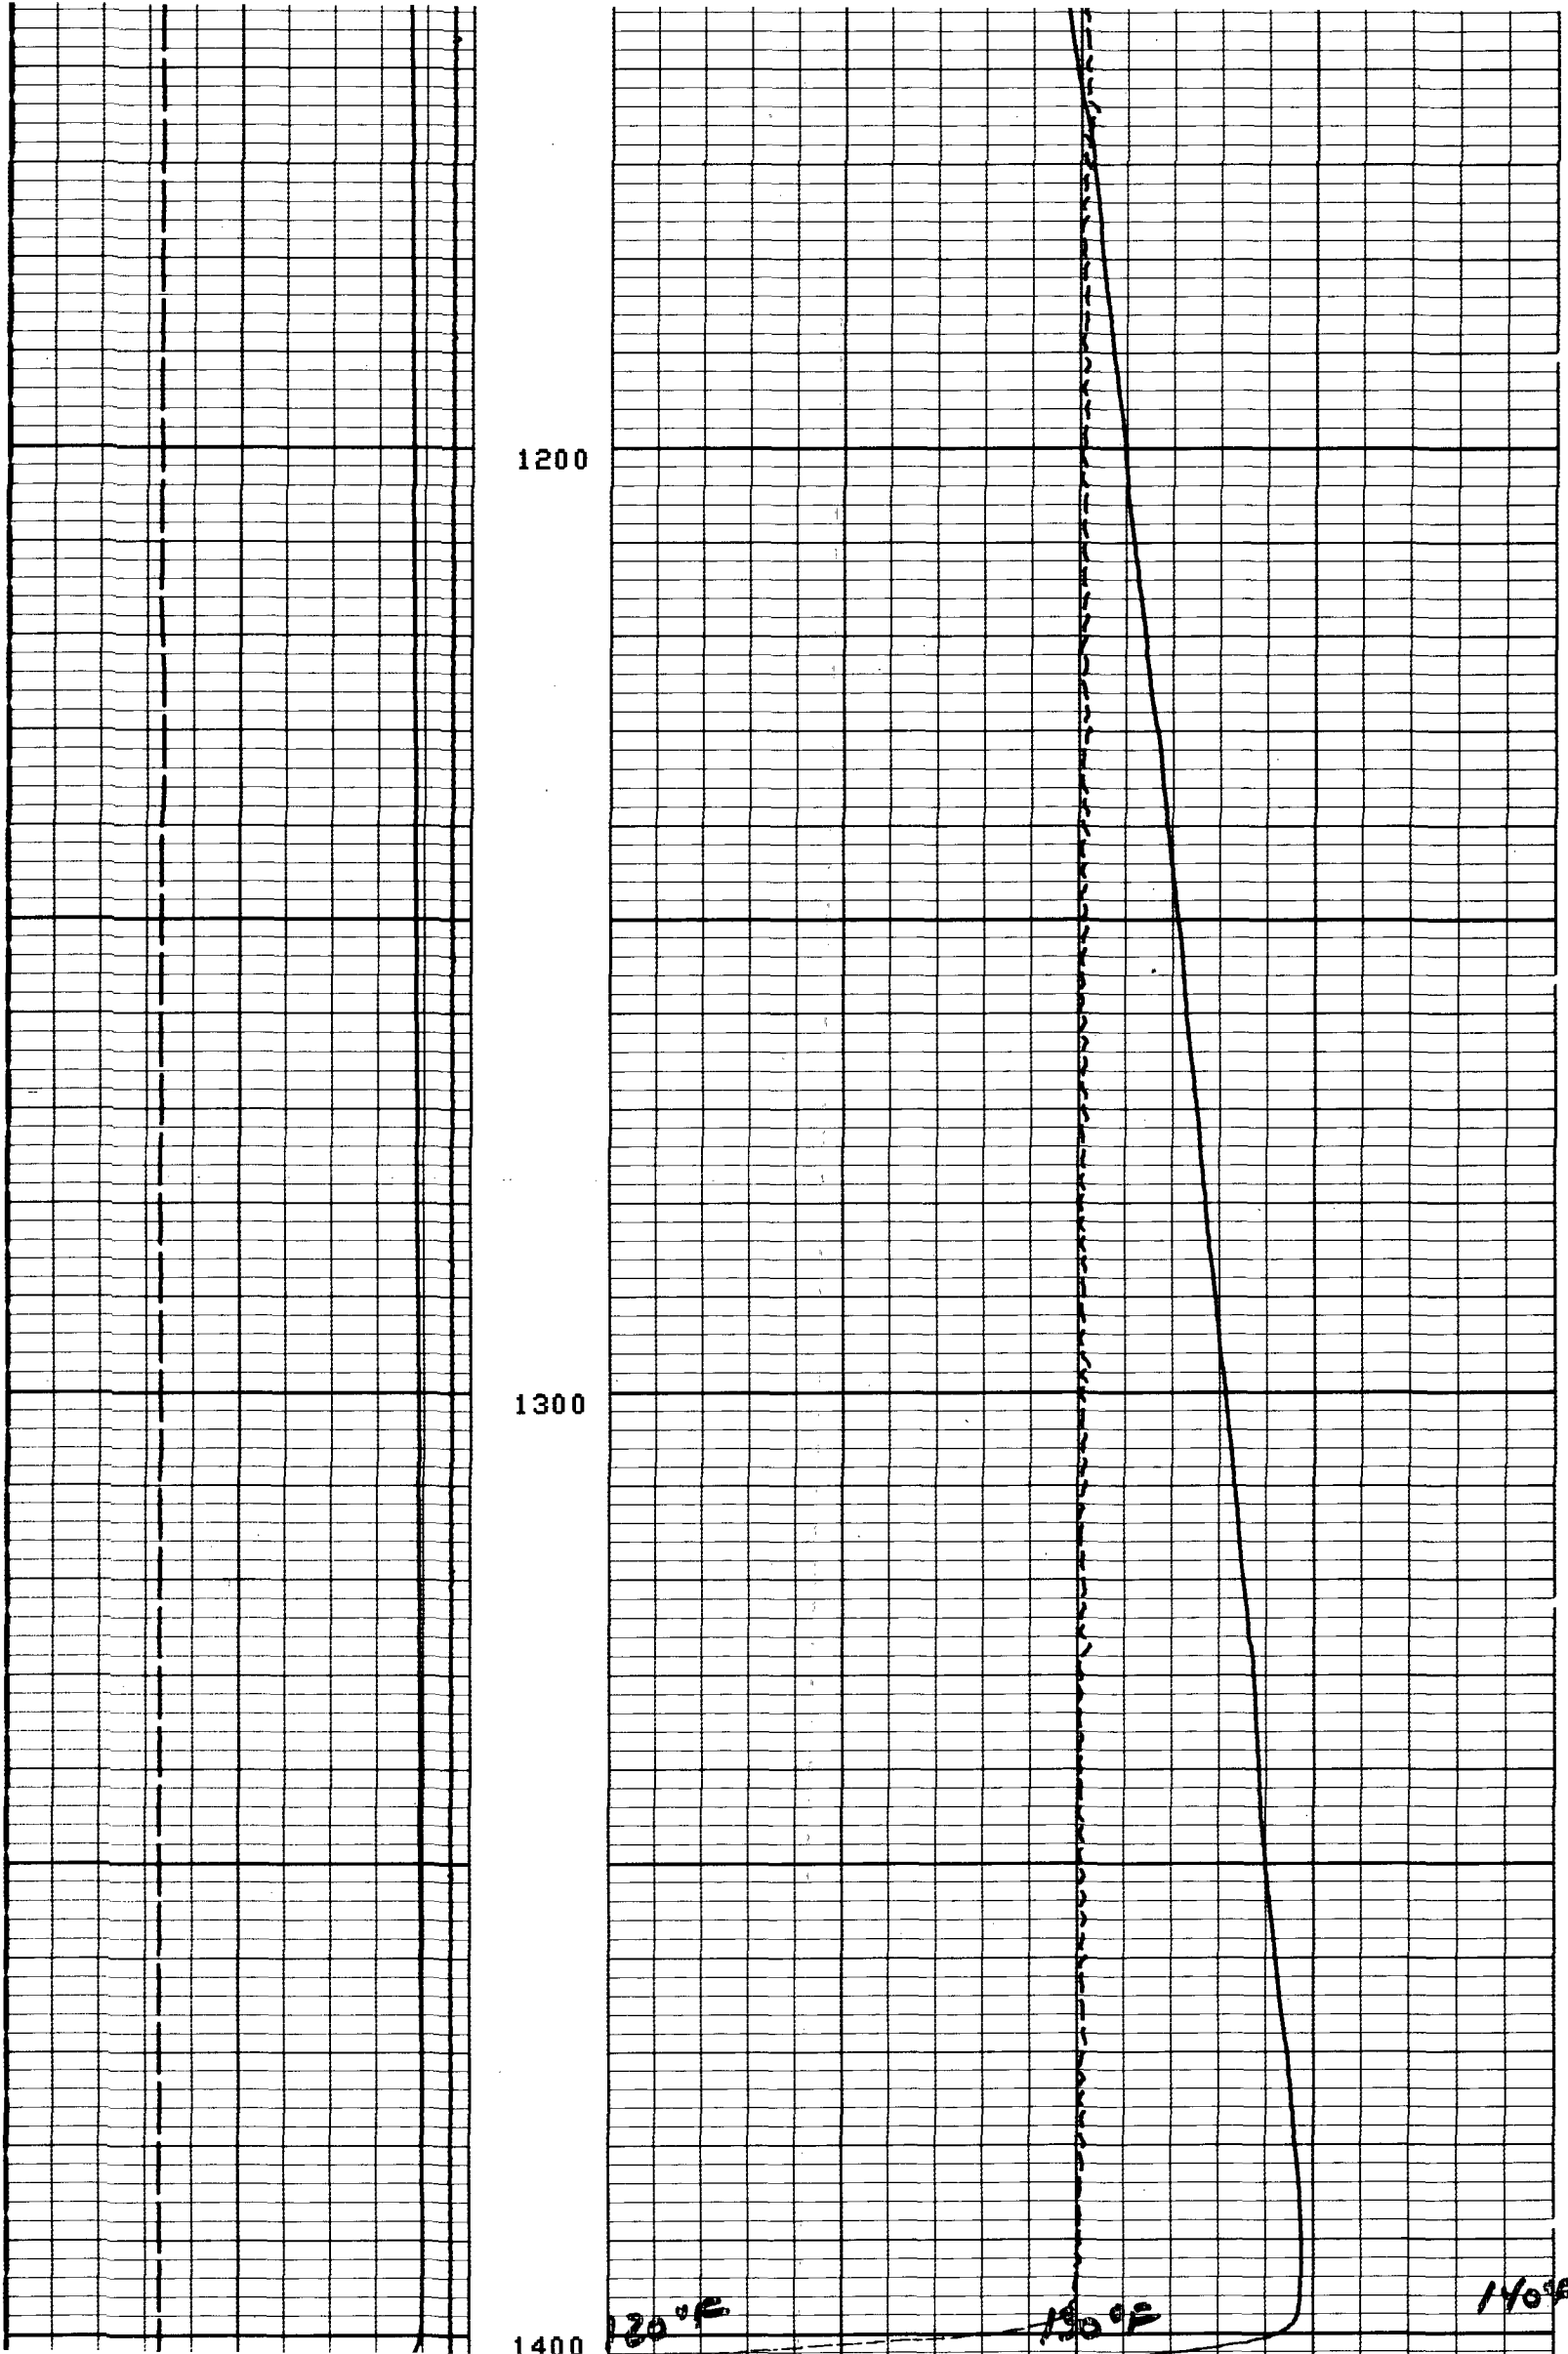

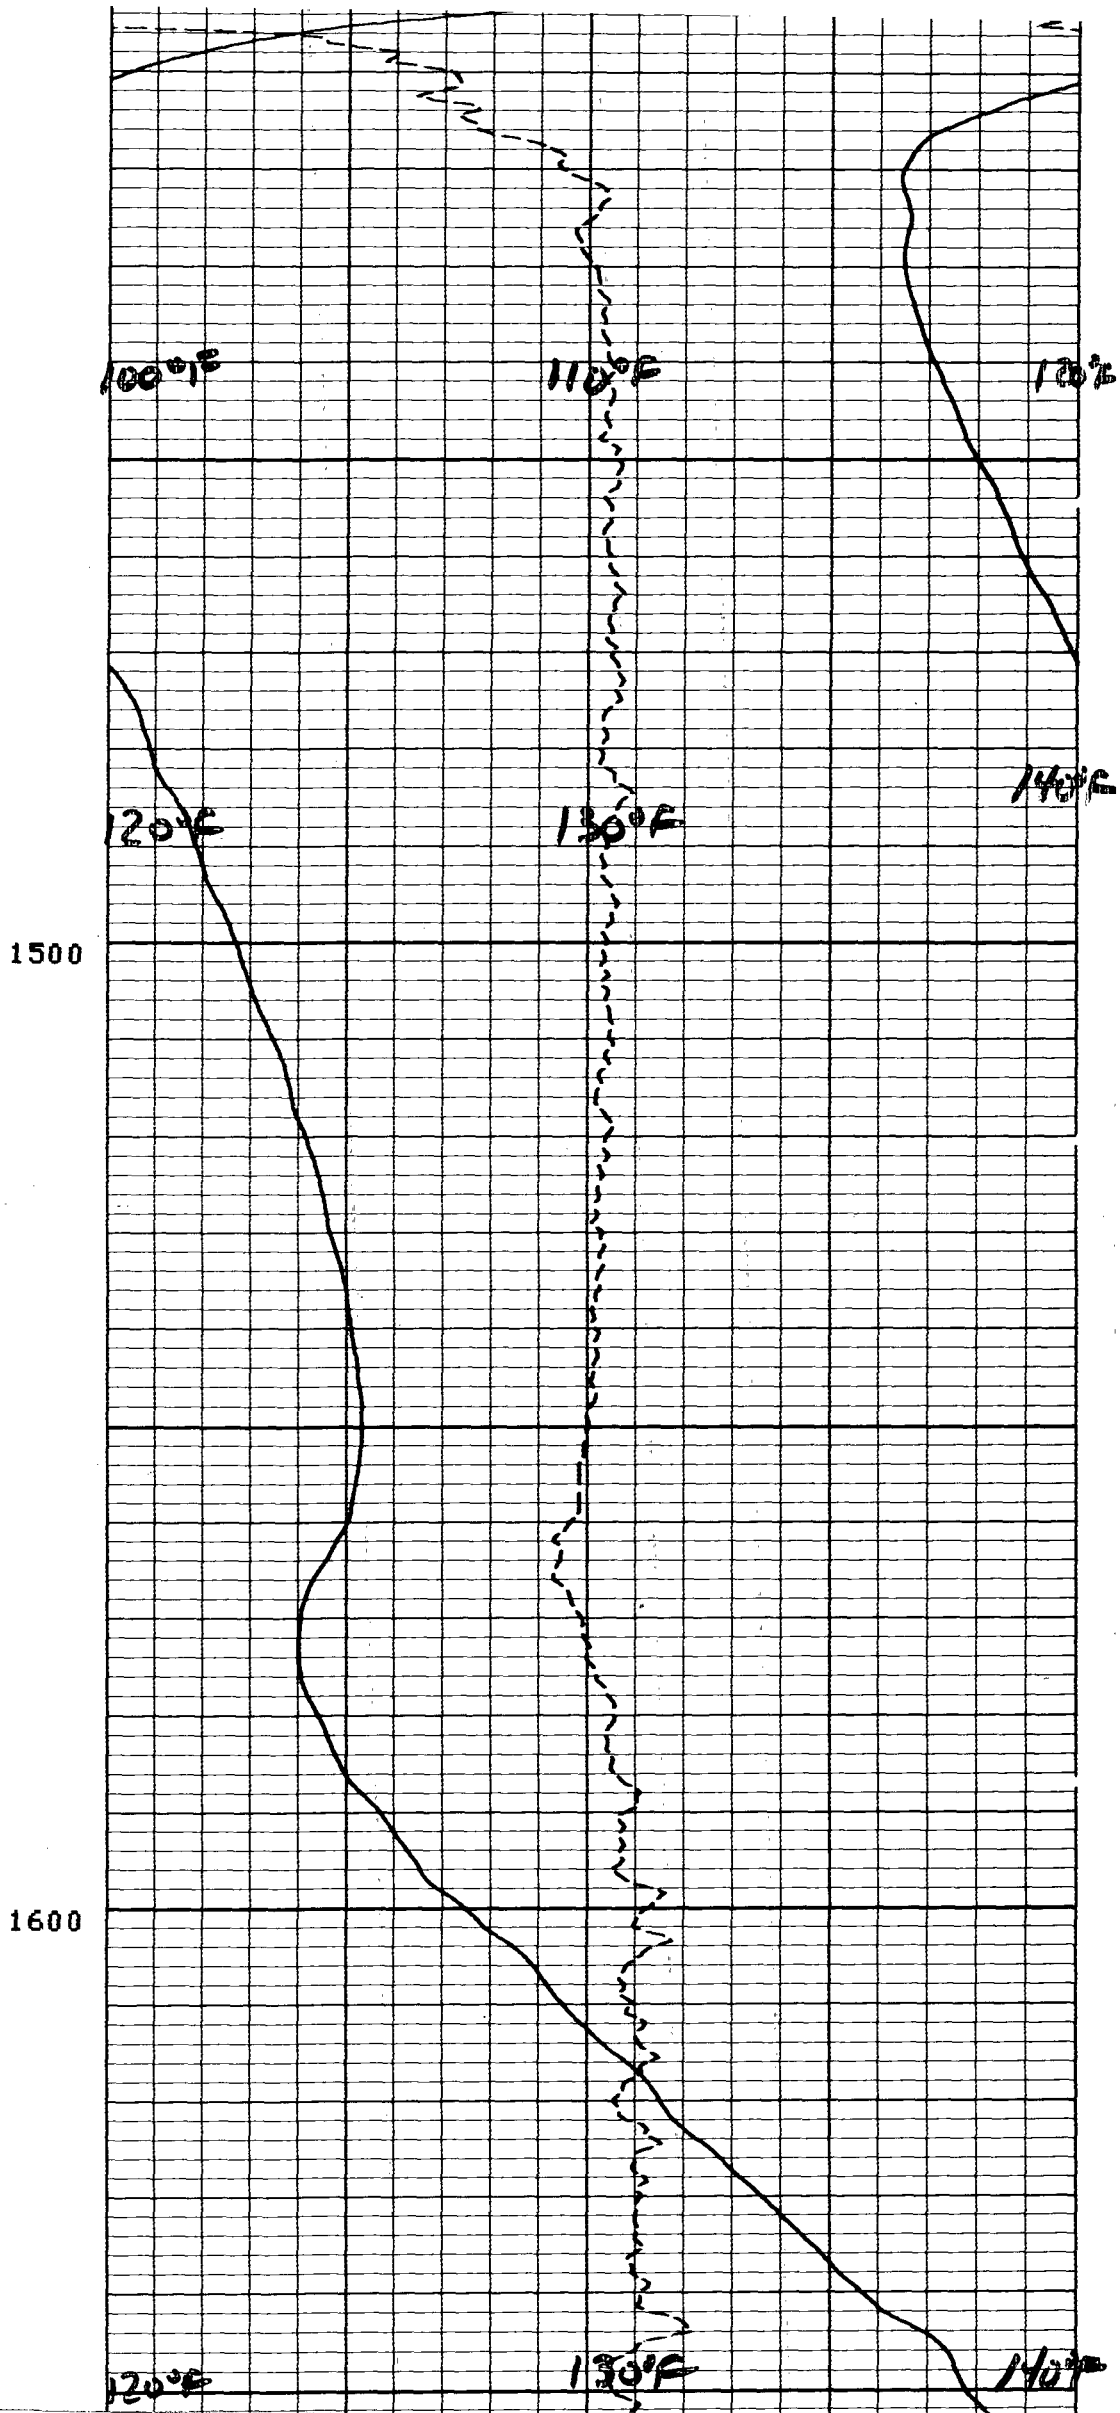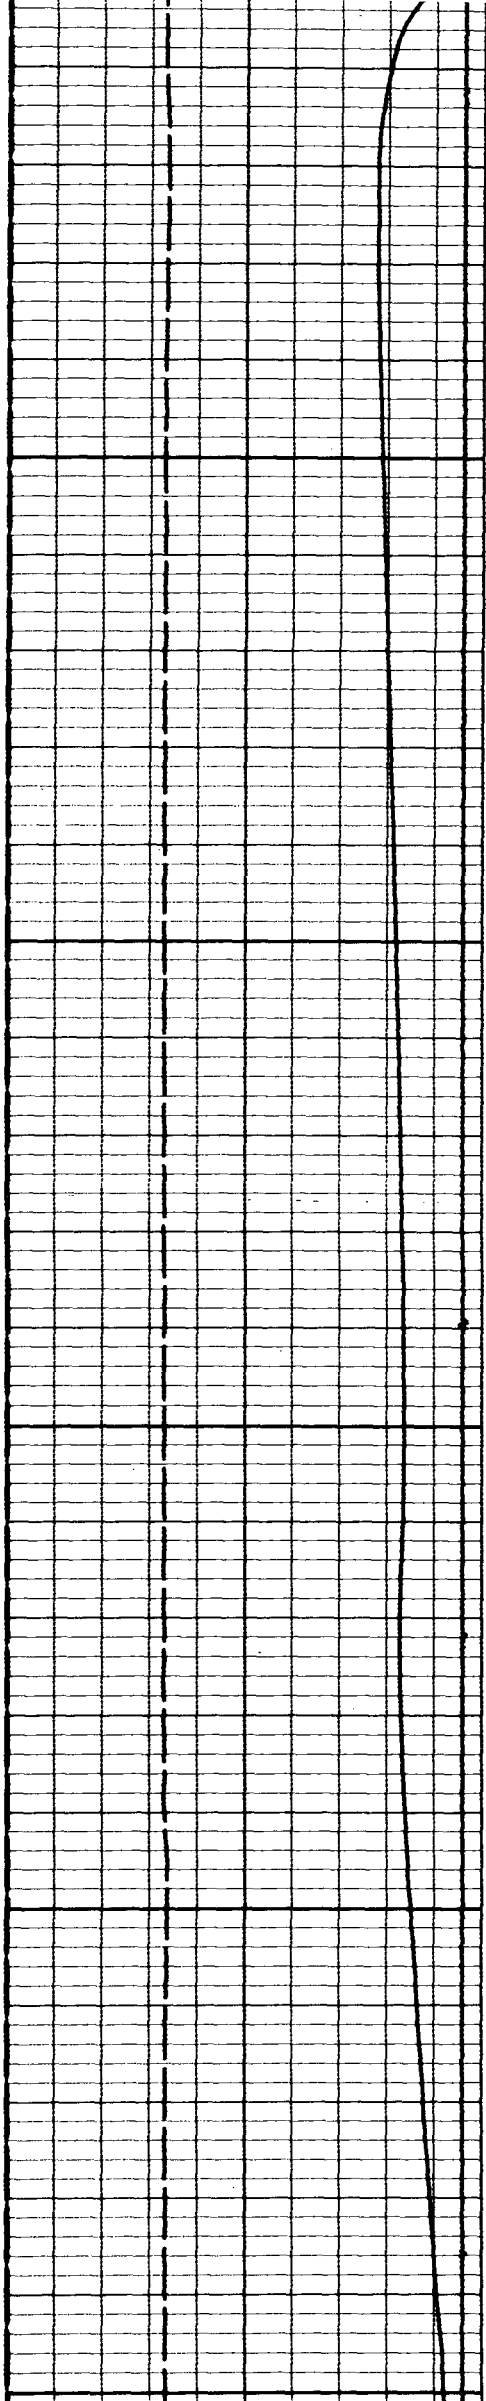



1700

140°F

150°F

160°F


200°F


130°F

140°F


1800

1900

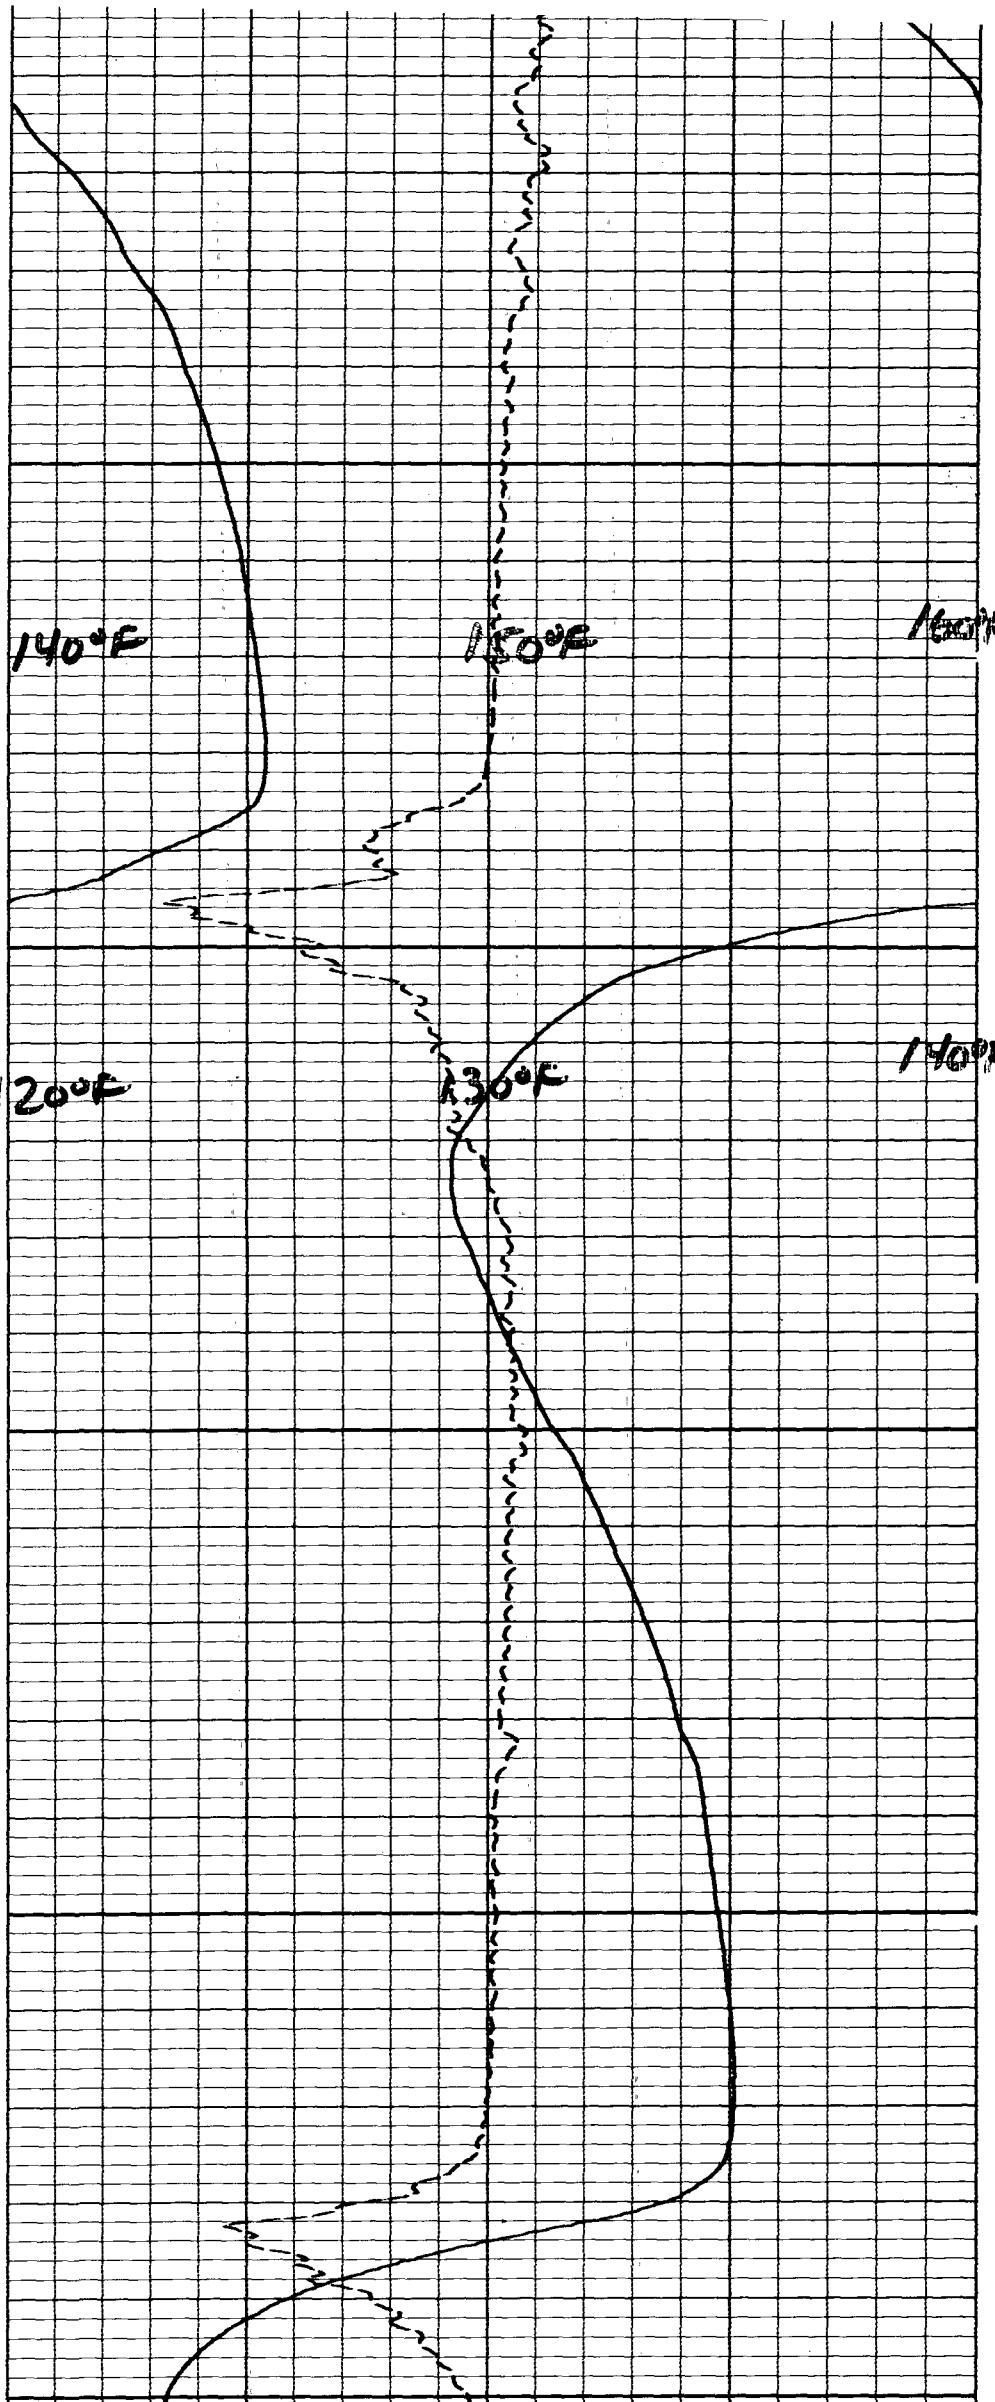


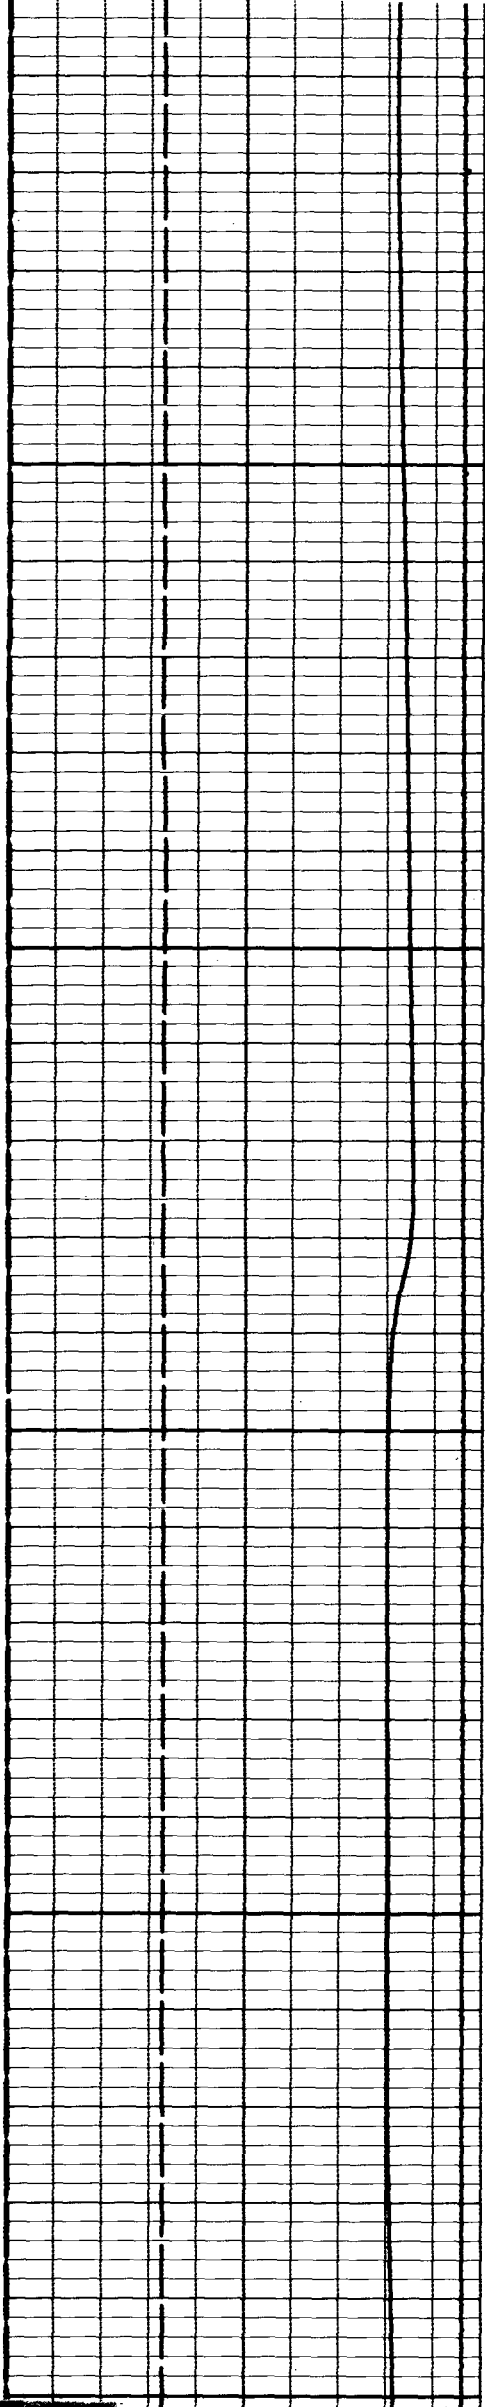

2000

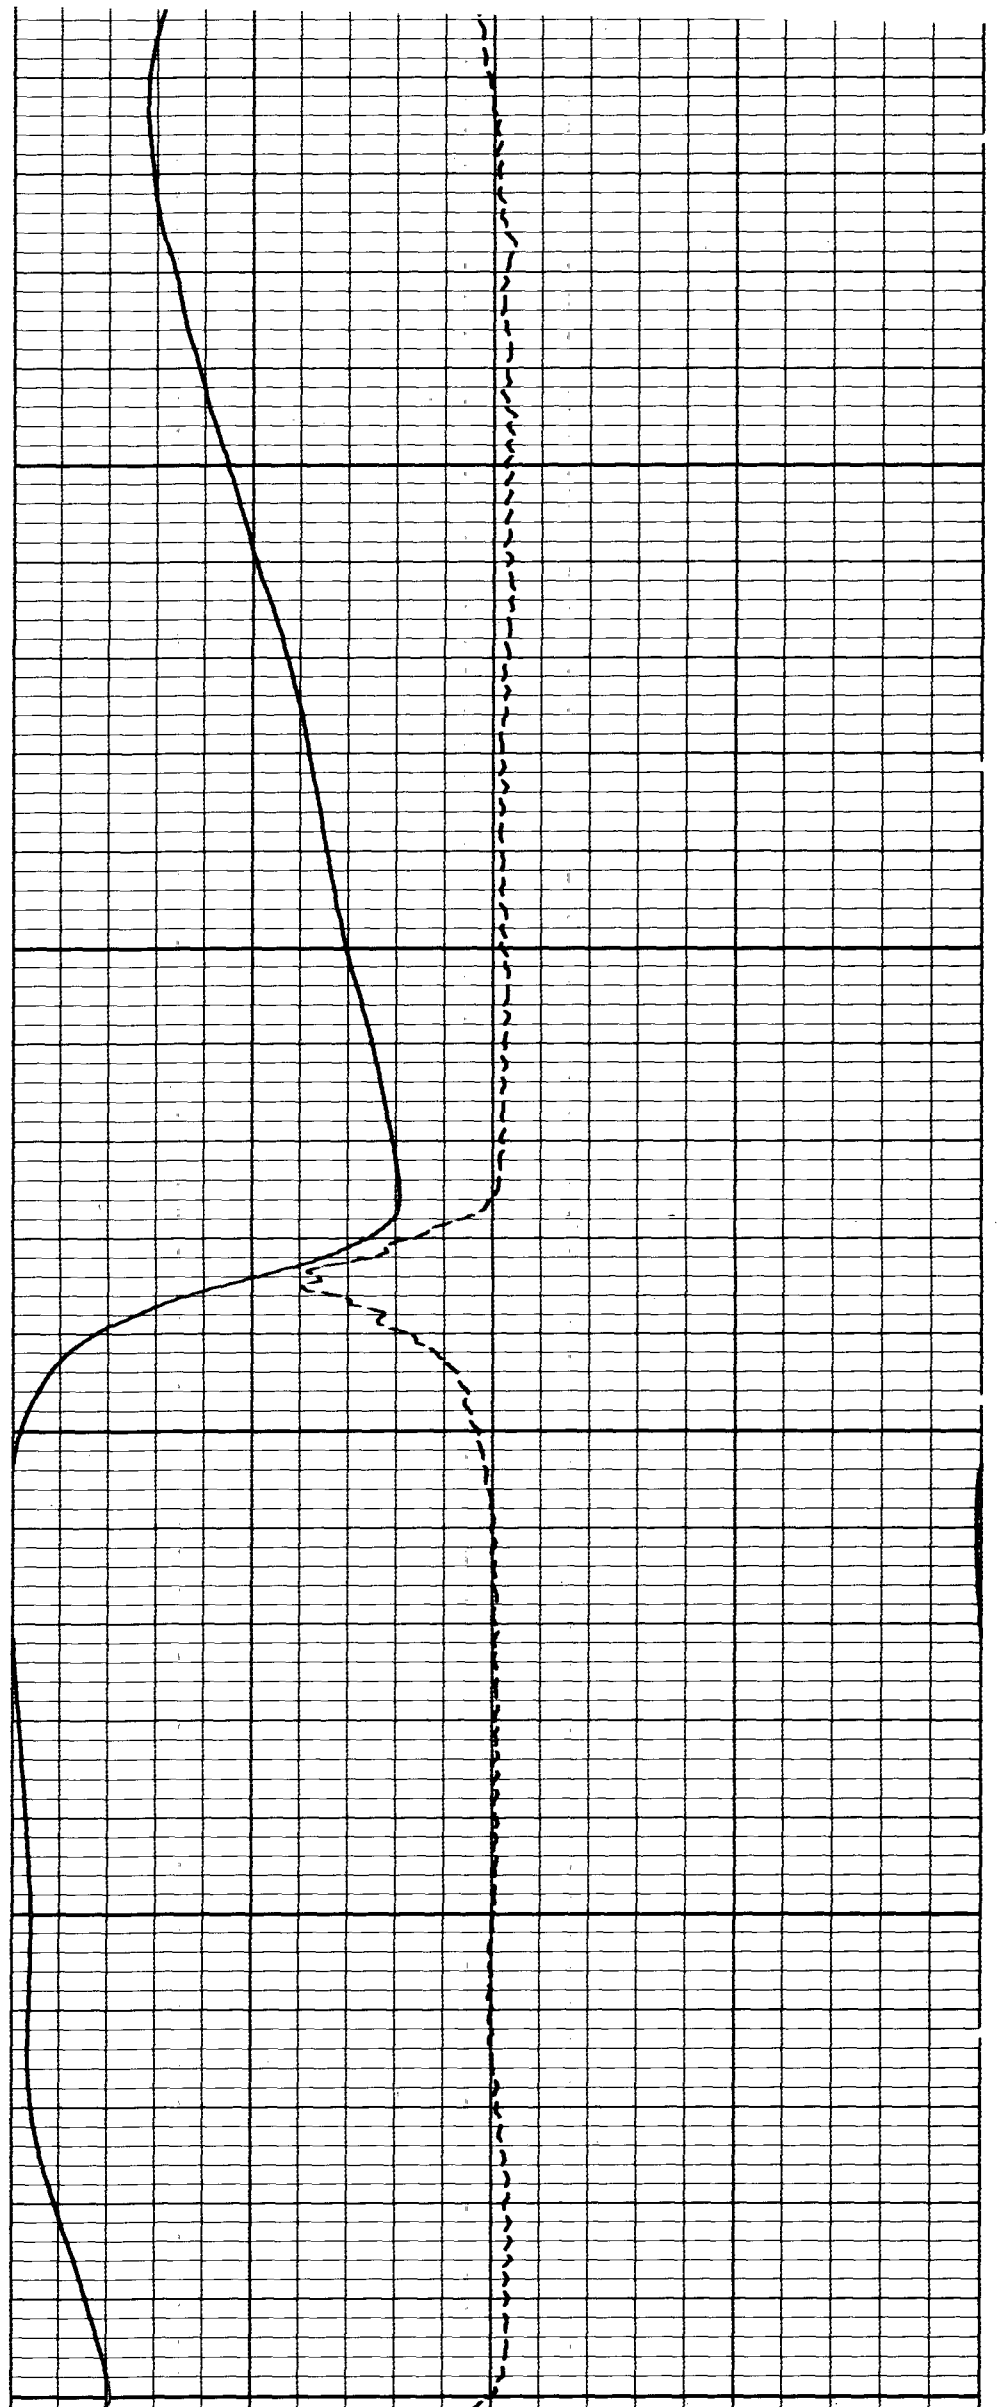

2100

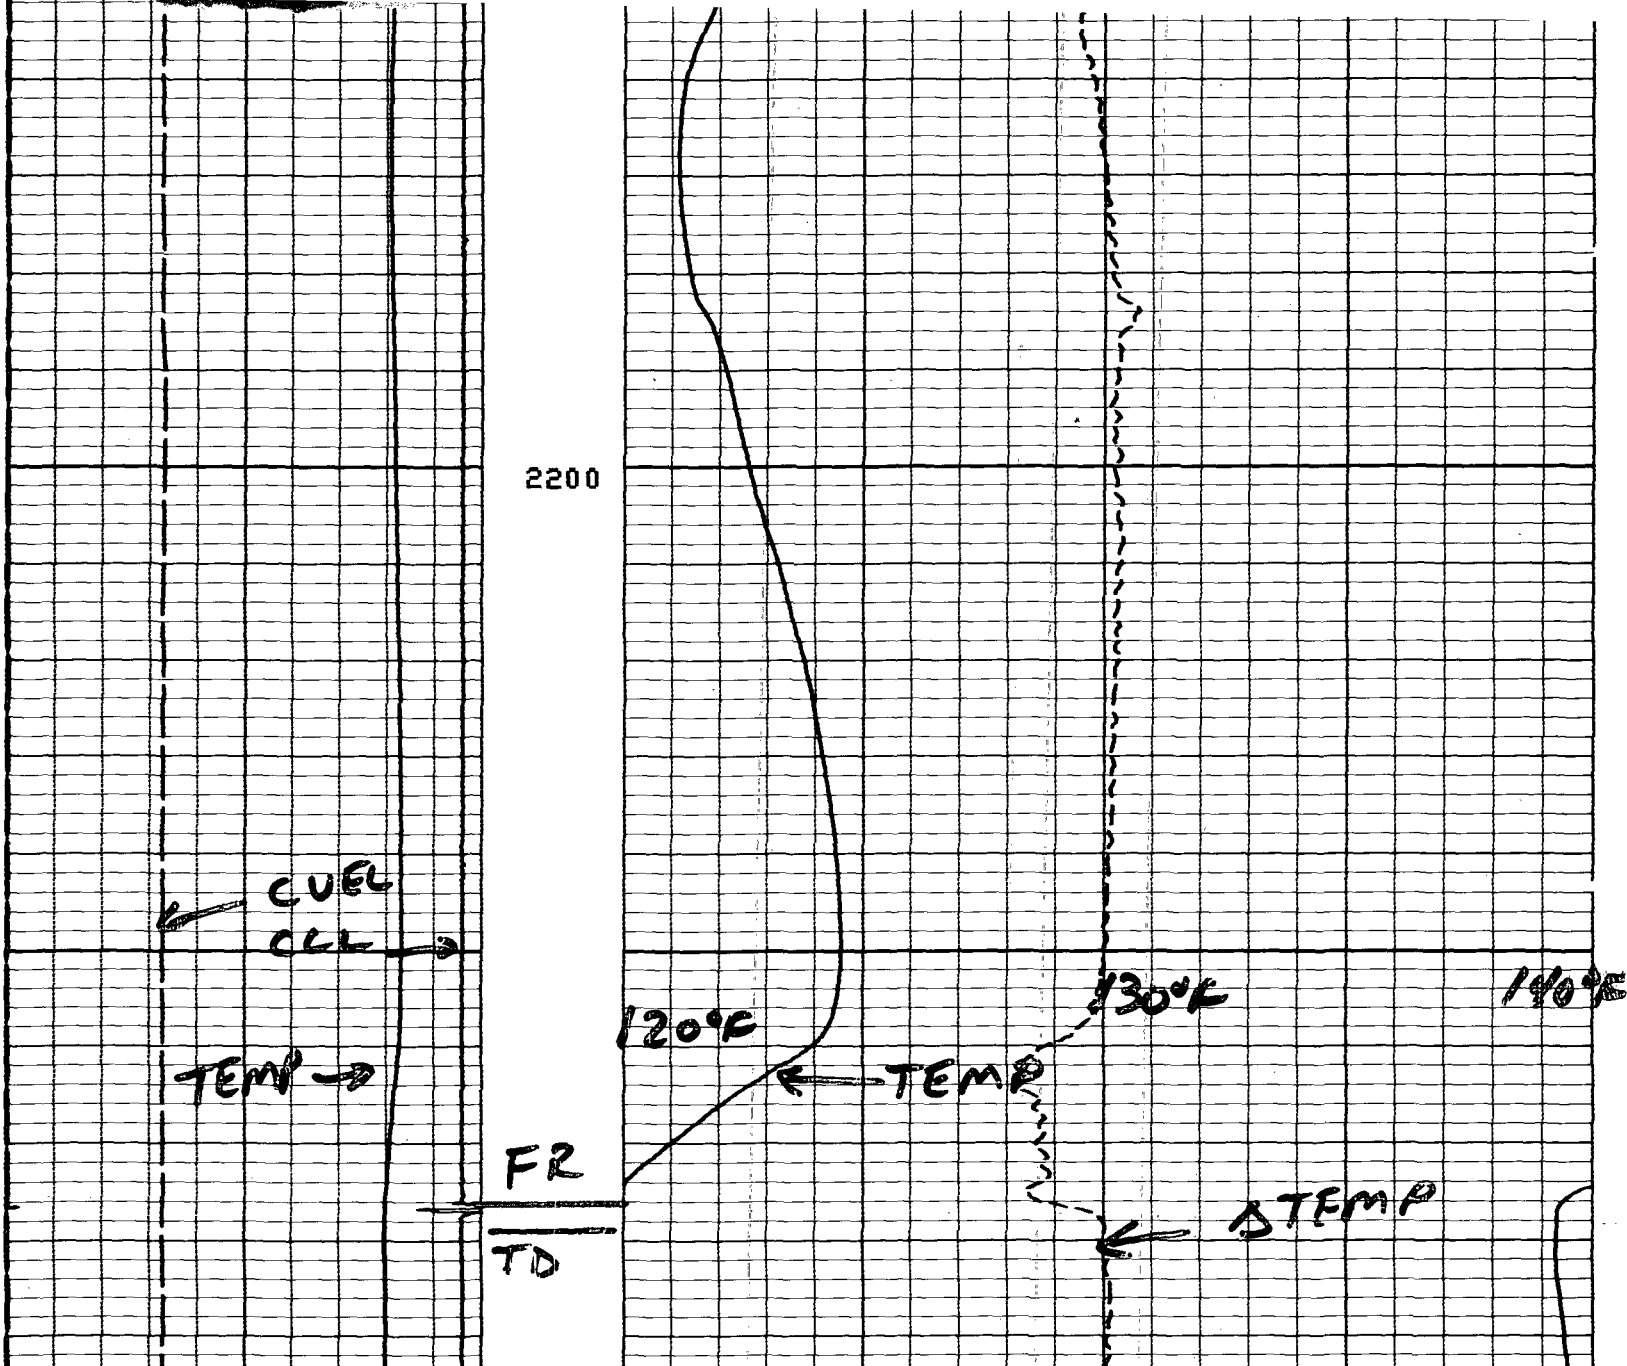

CP 27.772

FILE

1

19-NOV-87 13:44

0.0	-200.0	-1.000	1.0000
	CVEL(F/MN)		DTEM(DF/F)
0.0	200.00	80.000	100.00
	CVEL(F/MN)		TEMP(DEGF)
-19.00	1.0000		
	CCL		
0.0	150.00		
	TEMP(DEGF)		

BEFORE SURVEY CALIBRATION SUMMARY

PERFORMED: 19-NOV-87 12:55
 PROGRAM FILE: HTS (VERSION 27.772 85/08/07)

HTTA

ELECTRONICS CALIBRATION SUMMARY

	MEASURED		CALIBRATED		UNITS
	ZERO	PLUS	ZERO	PLUS	DEGF
TEMP	38.3	231.6	32.0	212.0	

CP 27.772

FILE

0

19-NOV-87 12:55