



GEOPHYSICAL LOGGING DIVISION

YOUNGQUIST BROTHERS, Inc

FLUID CONDUCTIVITY TEMPERATURE LOG

Company CITY OF FT. MYERS
Well MONITOR WELL 1
Field CH2M HILL
County LEE
State FLORIDA

Company CITY OF FT. MYERS
Well MW-1
Field CH2M HILL
County LEE
State FLORIDA

Location
 Permanent Datum PAD
 Log Measured From
 Drilling Measured From
 Elevation 20'
 Other Services SEE COMMENTS
 Elevation K.B. D.F. 23.5' G.L. 20'

Date	28-MAR-2002
Run Number	FOUR
Depth Driller	1750'
Depth Logger	1750'
Bottom Logged Interval	1750'
Top Log Interval	CASING
Open Hole Size	11"
Type Fluid	WATER
Density / Viscosity	N/A
Max. Recorded Temp.	N/A
Estimated Cement Top	N/A
Time Well Ready	ON ARRIVAL
Time Logger on Bottom	08:00
Equipment Number	103
Location	FT. MYERS DENISON R. DEAN
Recorded By	CATHEY
Witnessed By	

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To
ONE	12.25"	SURFACE	460'				
THREE	12.25"	CASING	1250'				
FOUR	22"	CASING	1256'				
FIVE	11"	CASING	1750'				
Casing Record		Size		Wgt/Ft		Top	Bottom
Surface String		24"		3/5		SURFACE	450'
Prod. String		16"		500		SURFACE	1250'
Production String							
Liner							

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments


DYNAMIC FLOWRATE = 66

 OTHER SERVICES:
 X-Y CALIPER/GAMMA RAY
 DUAL INDUCTION
 BOREHOLE COMPENSATED SONIC FLOWMETER


Database File: ftmmw1.db
 Dataset Pathname: run4/pass16
 Presentation Format: fri_mg.prs
 Dataset Creation: Thu Mar 28 17:21:33 2002 by Log VER_5.4
 Charted by: Depth in Feet scaled 1:240



70	DYNAMIC TEMP (degF)	90	20	DYNAMIC FLUID CONDUCTIVITY (uS)	200000
70	STATIC TEMP (degF)	90	20	STATIC FLUID CONDUCTIVITY (uS)	200000

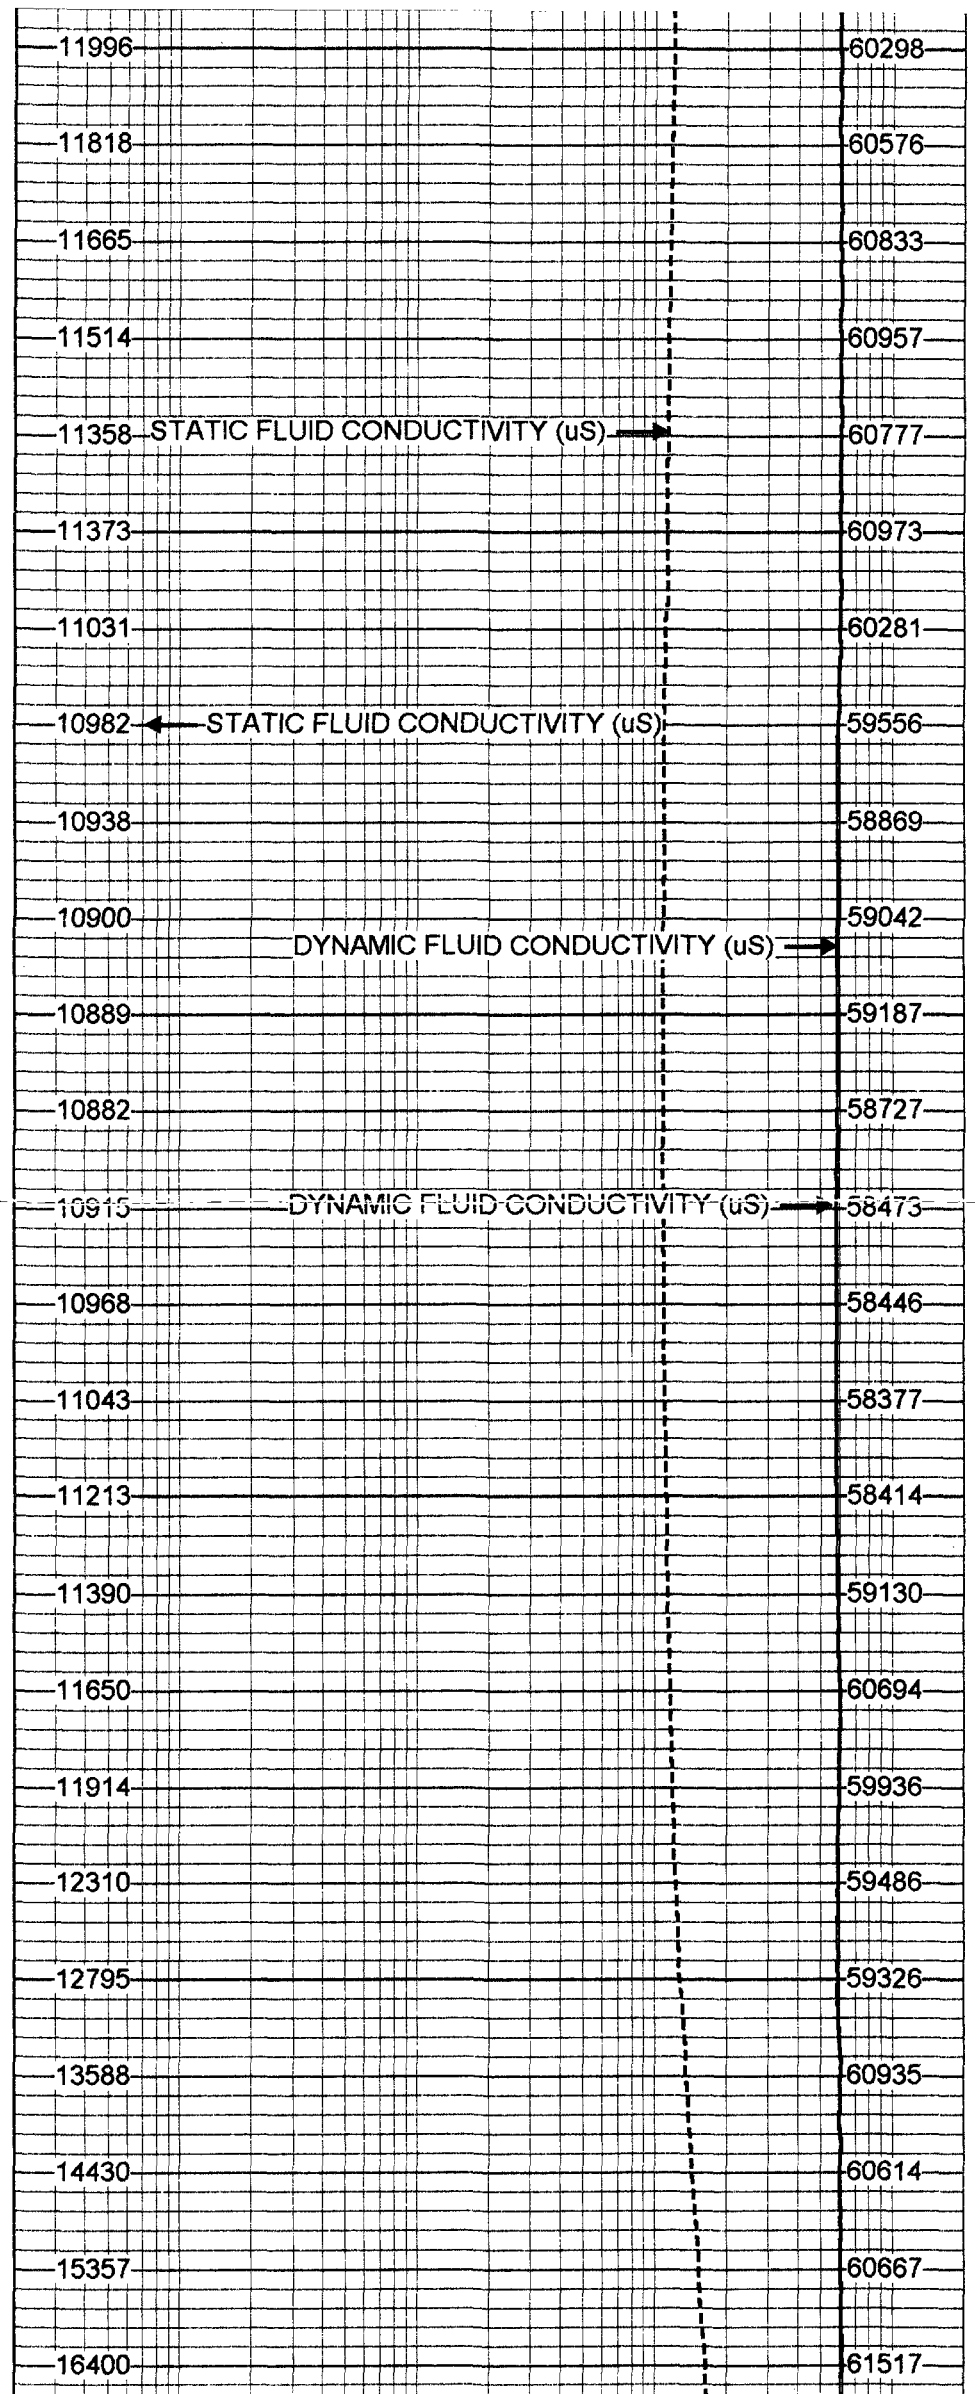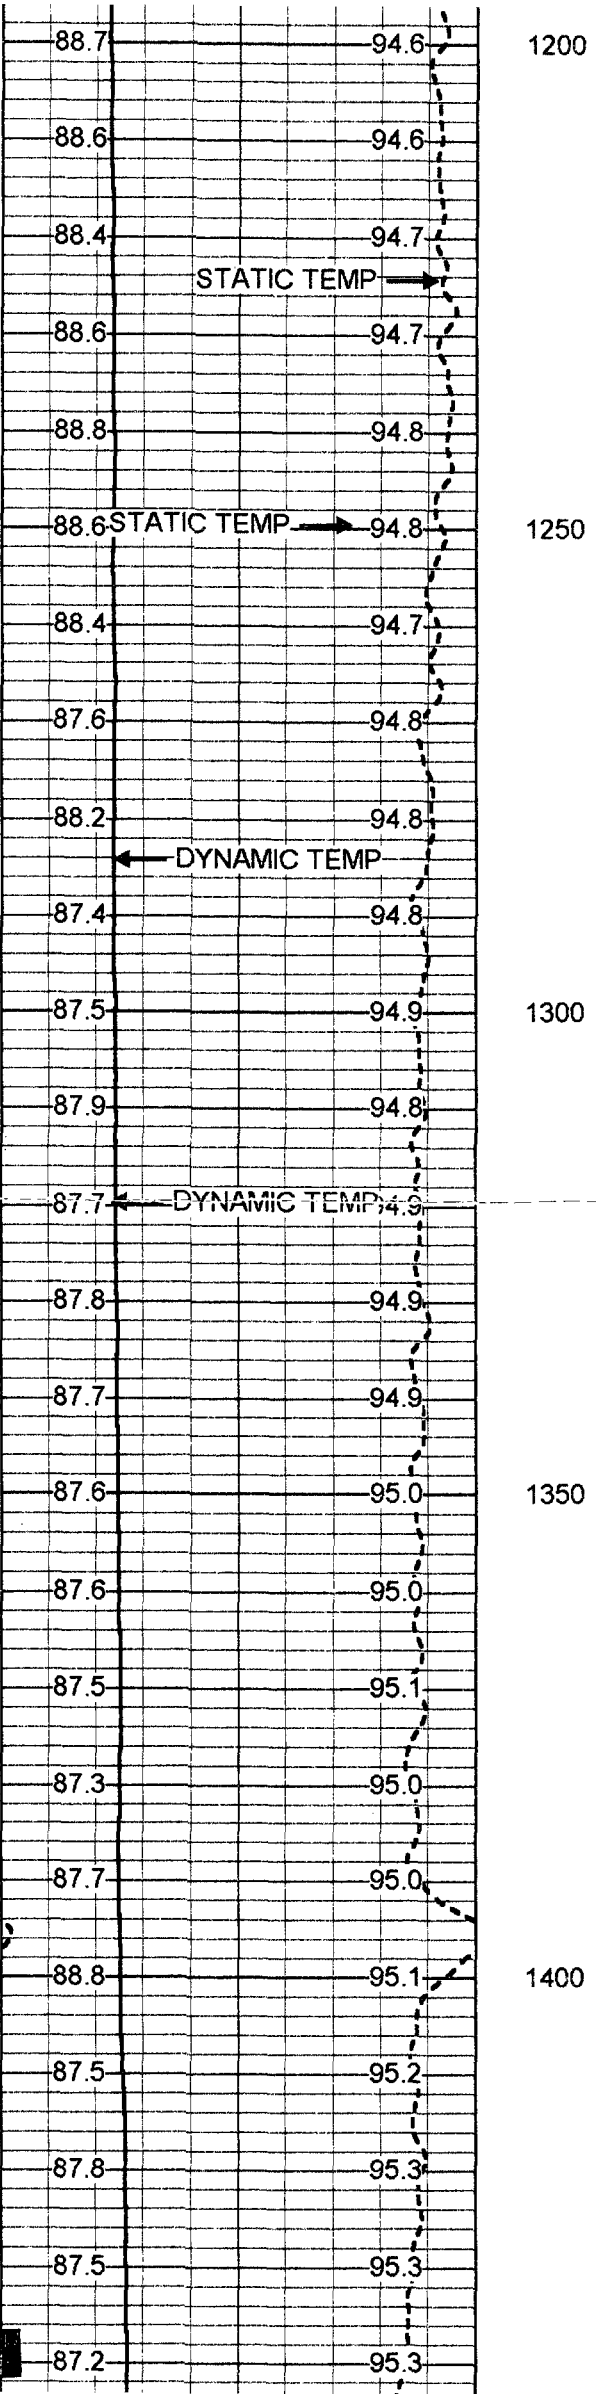

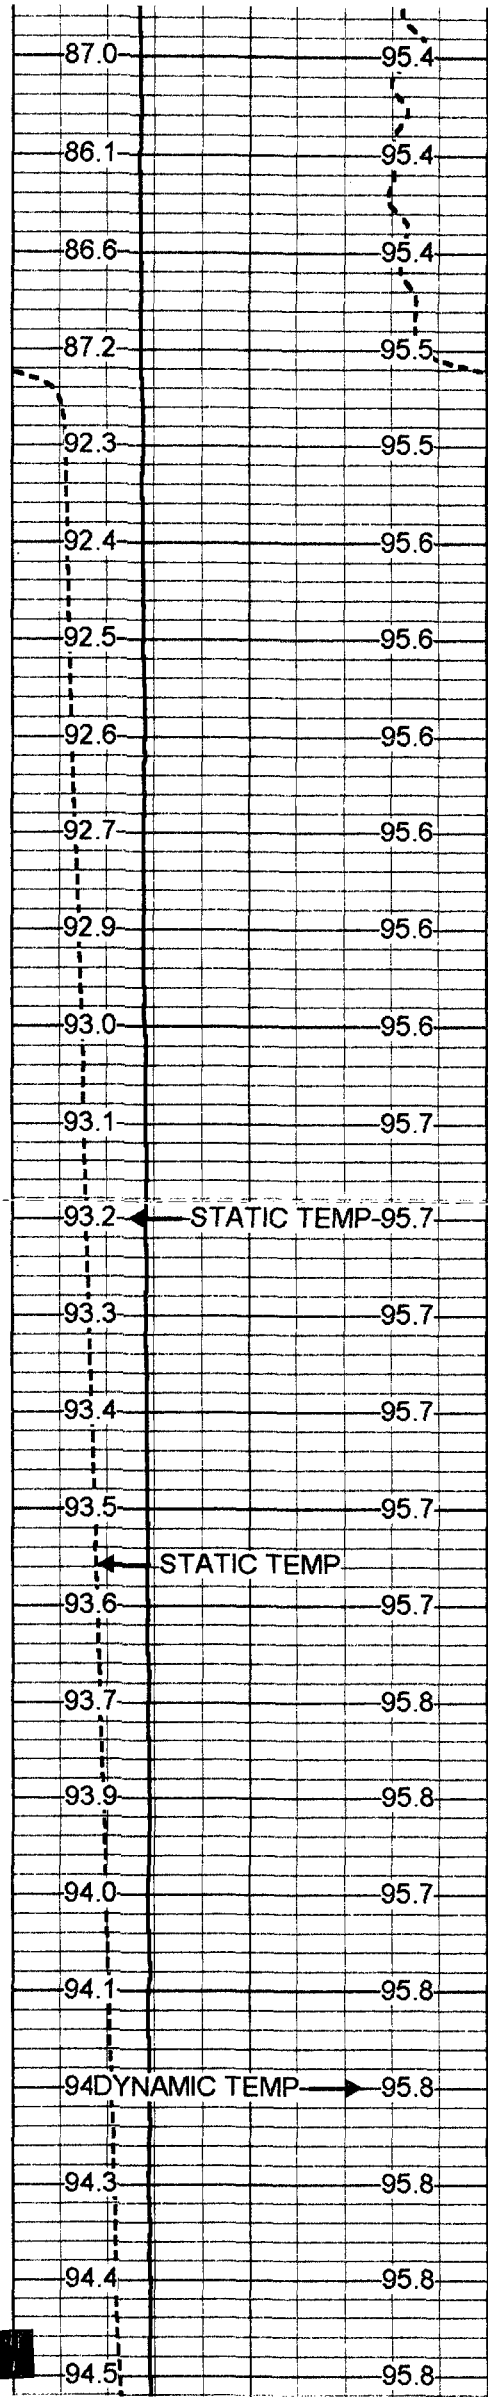

1450
1500
1550
1600
1650

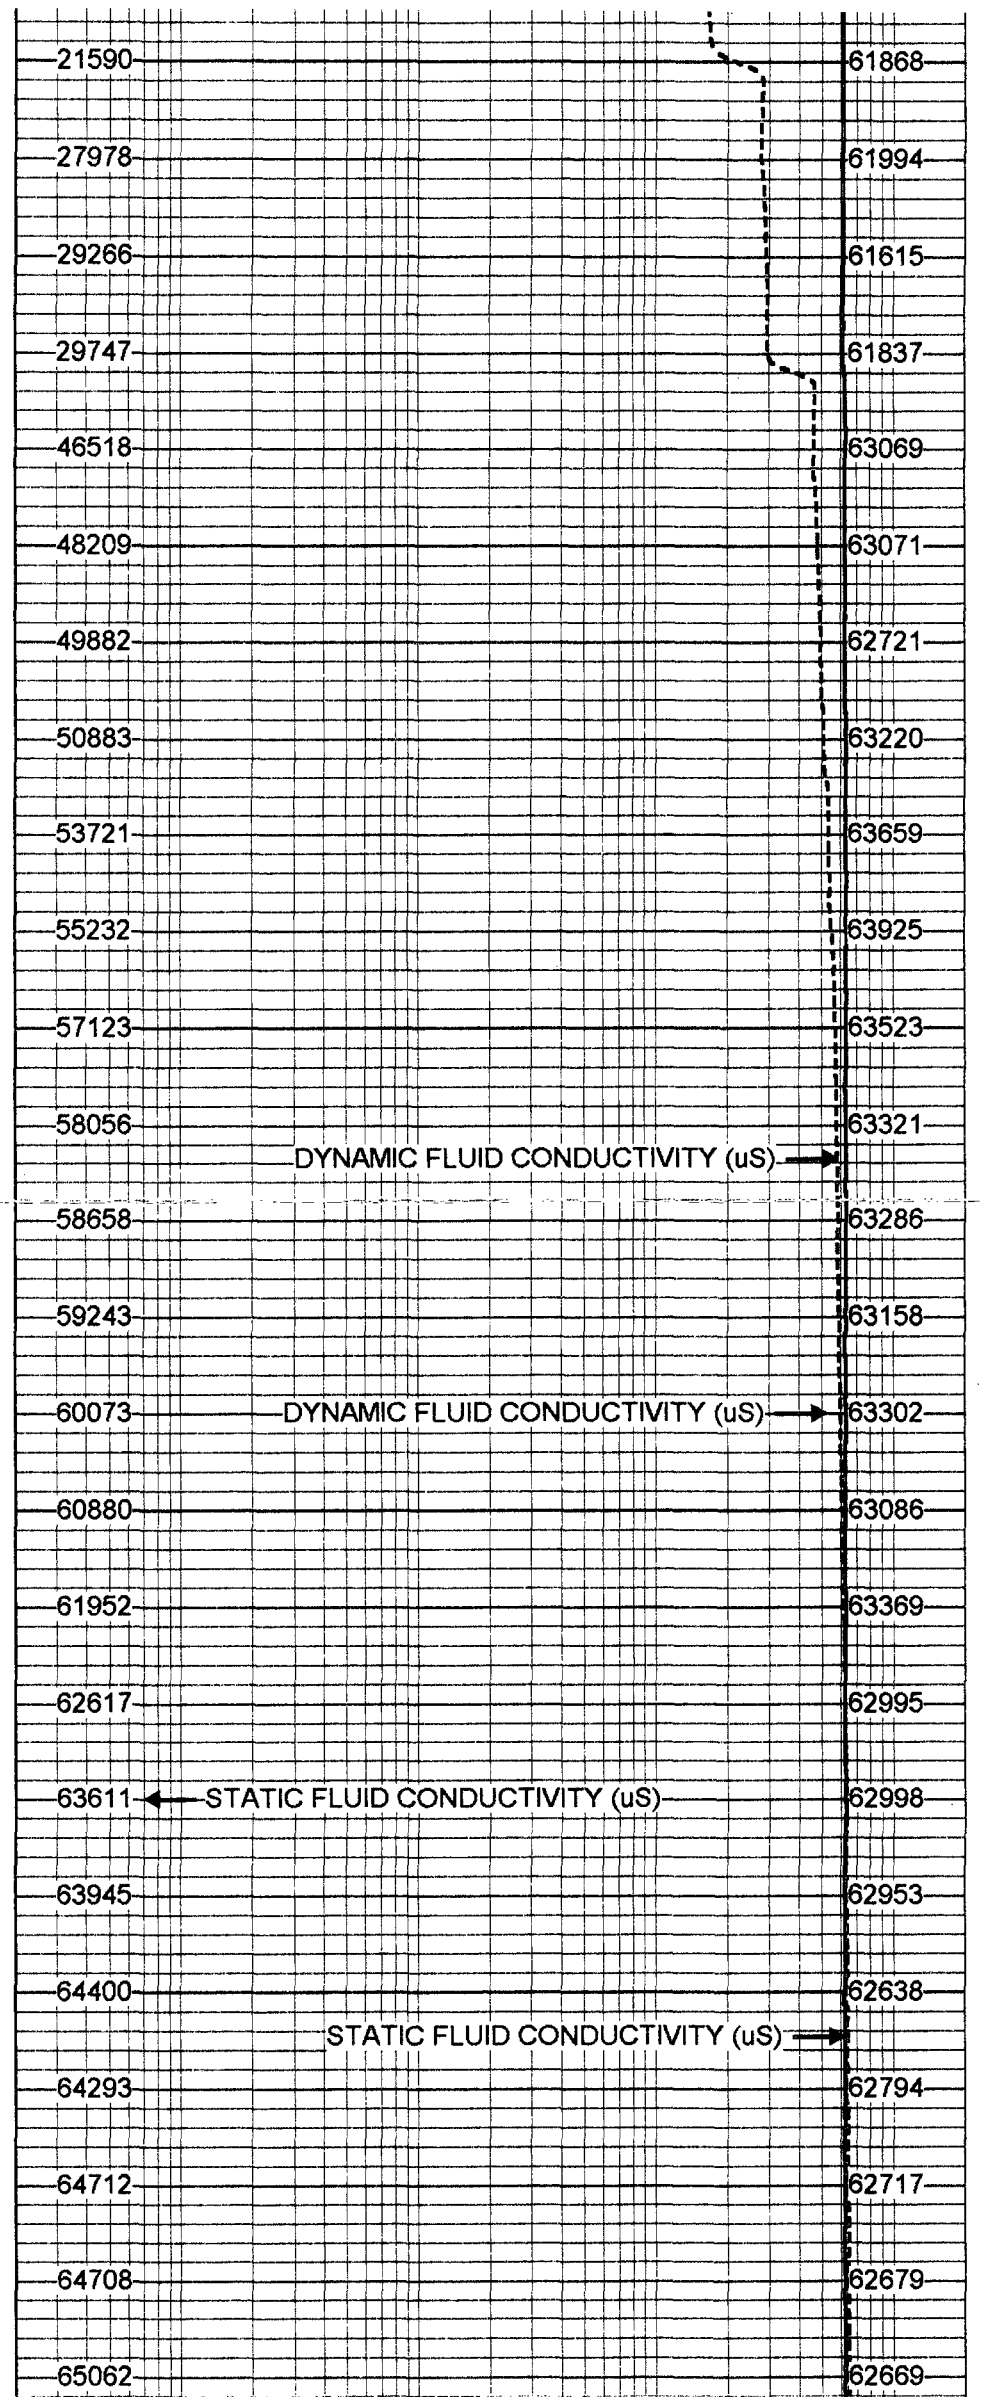

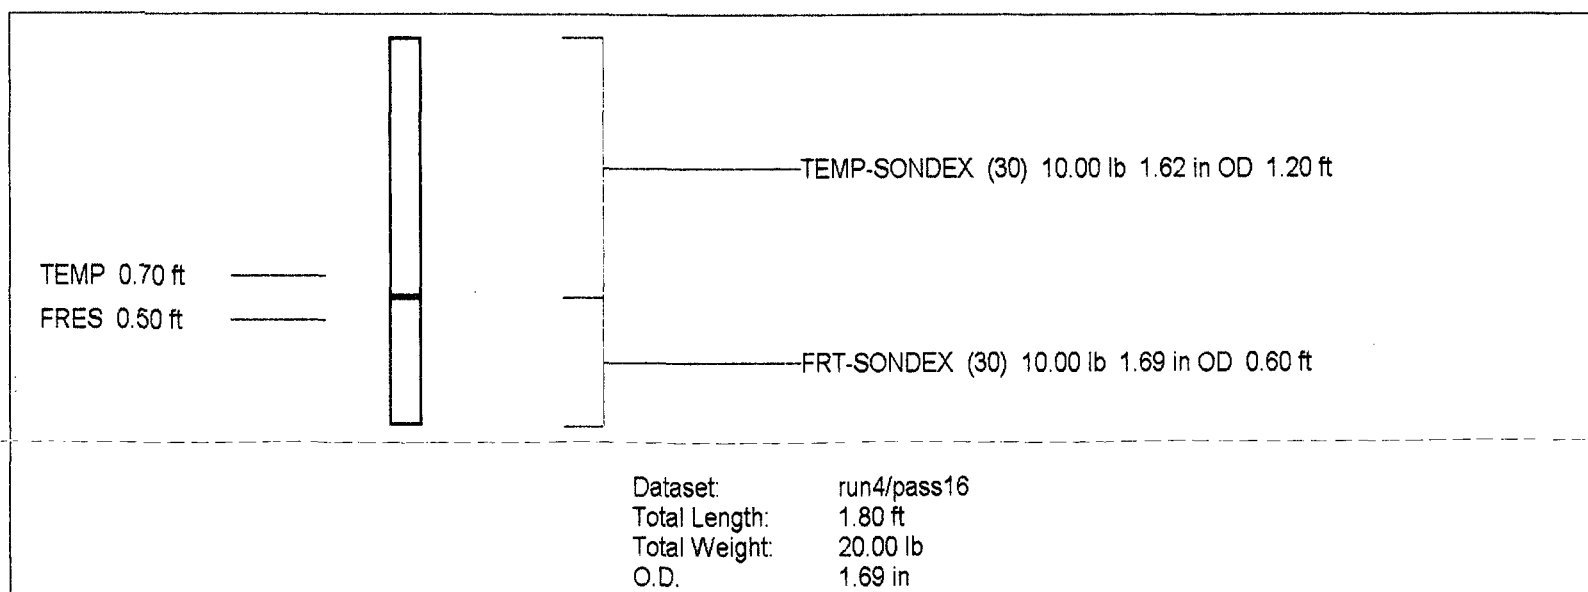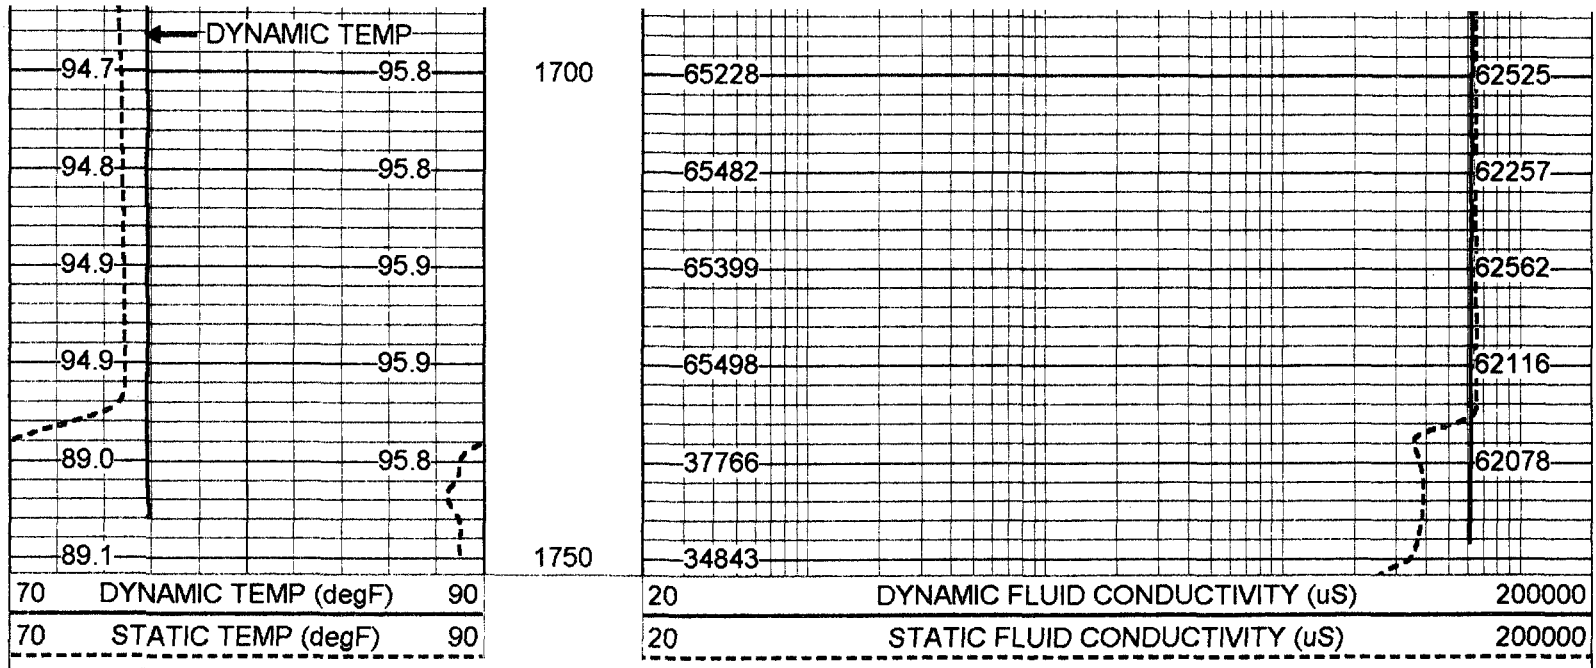

FRT Calibration Report

Serial Number:	30		
Tool Model:	SONDEX		
Performed:	Mon May 07 16:59:04 2001		

Point #	Reading		Reference
1	38.604	cps	1000.000
2	332.194	cps	10000.000
3	1502.090	cps	50000.000
4		cps	
5		cps	
6		cps	

Temperature Calibration Report

Serial Number:	30		
Tool Model:	SONDEX		
Performed:	Mon May 07 15:43:28 2001		

Point #	Reading		Reference	
1	113.926	cps	33	degF
2	659.964	cps	140	degF
3		cps		degF