



FLUID CONDUCTIVITY TEMPERATURE LOG

Company MISSIMMER INTERNATIONAL
 Well MONITOR WELL #1
 Field ISLAND WATER ASSOCIATION
 Country LEE
 State/Prv FLORIDA

Company MISSIMMER INTERNATIONAL
 Well MW - 1
 Field I.W.A
 Country LEE
 State/Prv FLORIDA

Location		Other Services	NONE
Permanent Datum	PAD	Elevation	5
Log Measured From	PAD	K.B.	
Drilling Measured From	PAD	D.F.	
		G.L.	

Date	14 DEC. 99
Run Number	THREE
Depth Driller	1700
Depth Logger	1698'
Bottom Logged Interval	1698'
Top Log Interval	CASING
Open Hole Size	11.75"
Type Fluid	WATER
Density / Viscosity	N/A
Max. Recorded Temp.	N/A
Estimated Cement Top	N/A
Time Well Ready	1230
Time Logger on Bottom	1300
Equipment Number	103
Location	FTMYERS
Recorded By	DENISON
Witnessed By	R STROSS

Borehole Record		Tubing Record	
Run Number	Bit	From	To
ONE	18"	SURFACE	426'
TWO	11.75"	SURFACE	1700'

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	12.75"	37.5 W.T.	SURFACE	420'
Pilot String				
Production String				
Liner				

REC'D 15 SEP
REC'D 15 SEP
DEP. - SURFACE

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


FLOWRATE = GPM




STATIC & DYNAMIC FCT

70 DYNAMIC TEMP (degF) 90
 70 STATIC TEMP (degF) 90

20 DYNAMIC FLUID CONDUCTIVITY 200000
 20 STATIC FLUID CONDUCTIVITY 200000

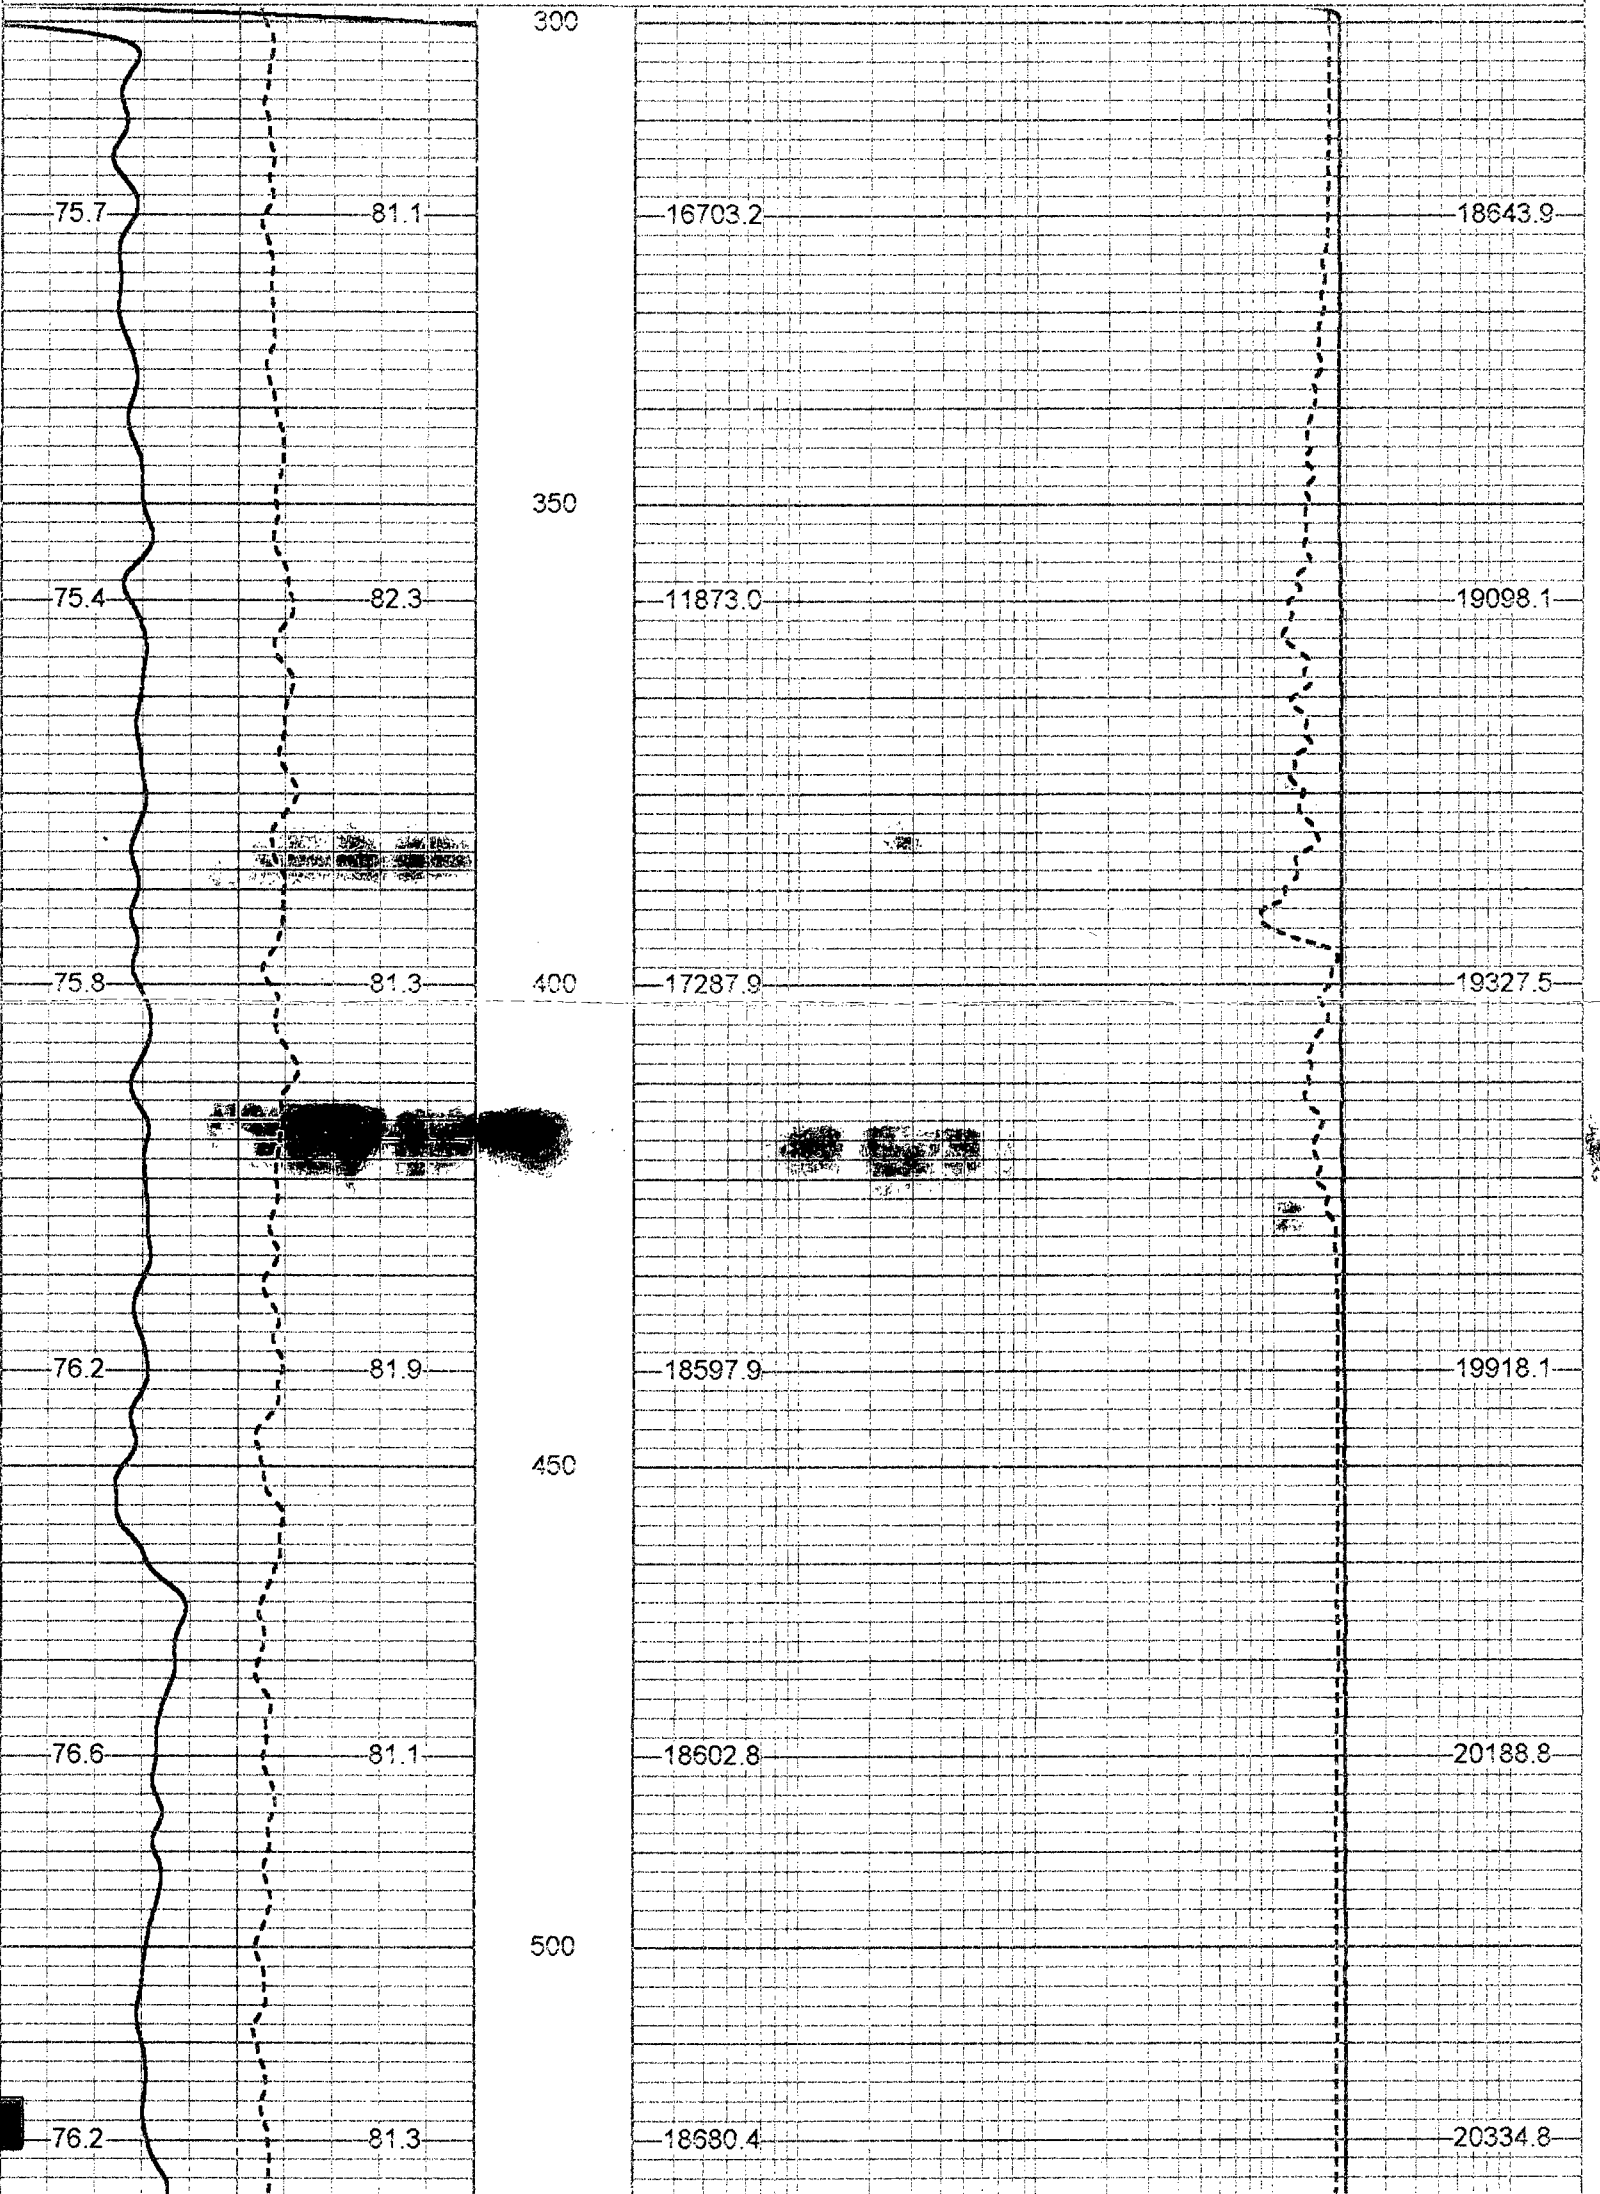

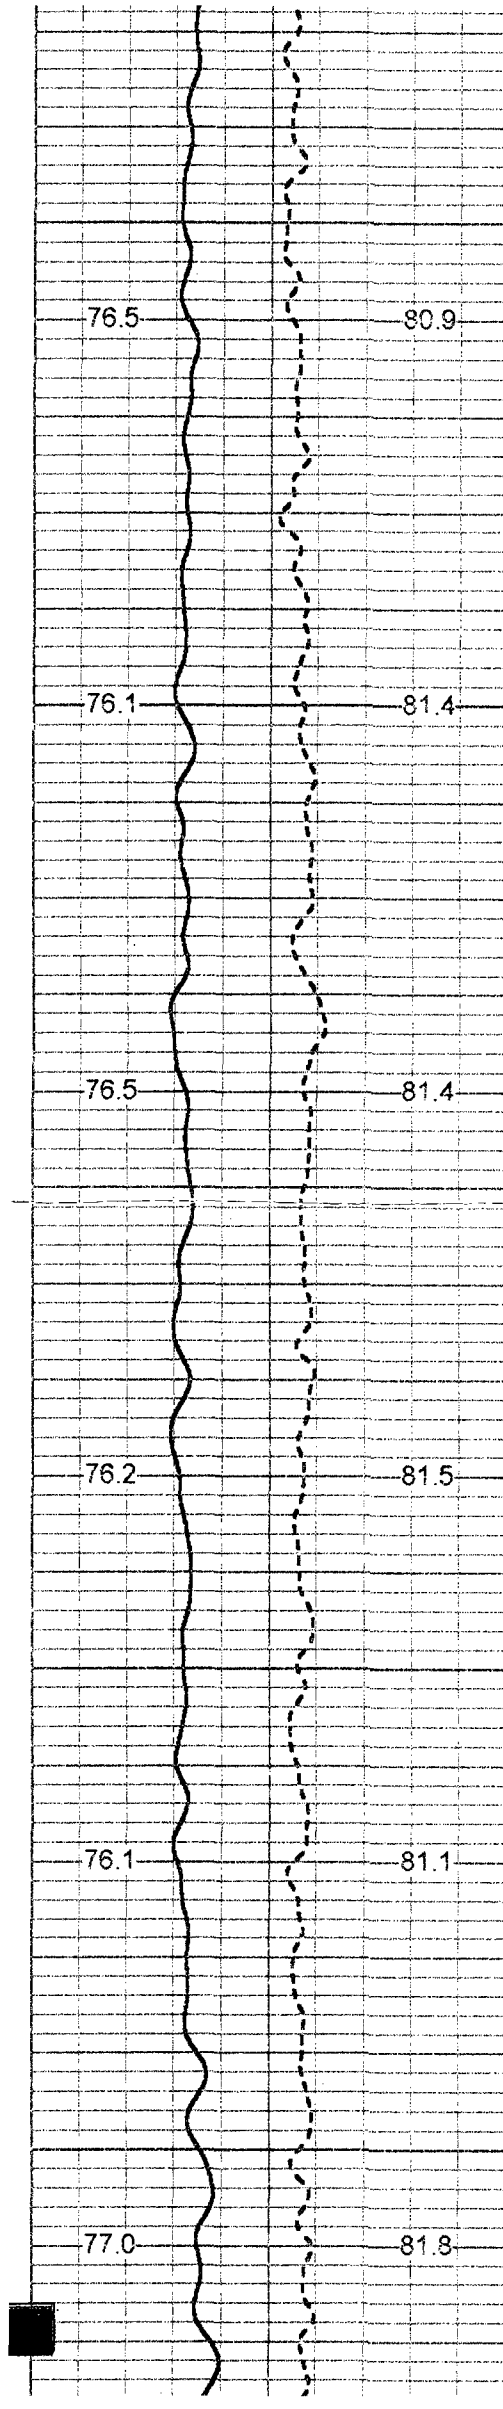

550

18665.7

20520.7

600

18698.1

20551.9

650

19104.1

20800.9

700

19248.6

20635.6


750



19429.1


20735.8

19282.9


20803.3

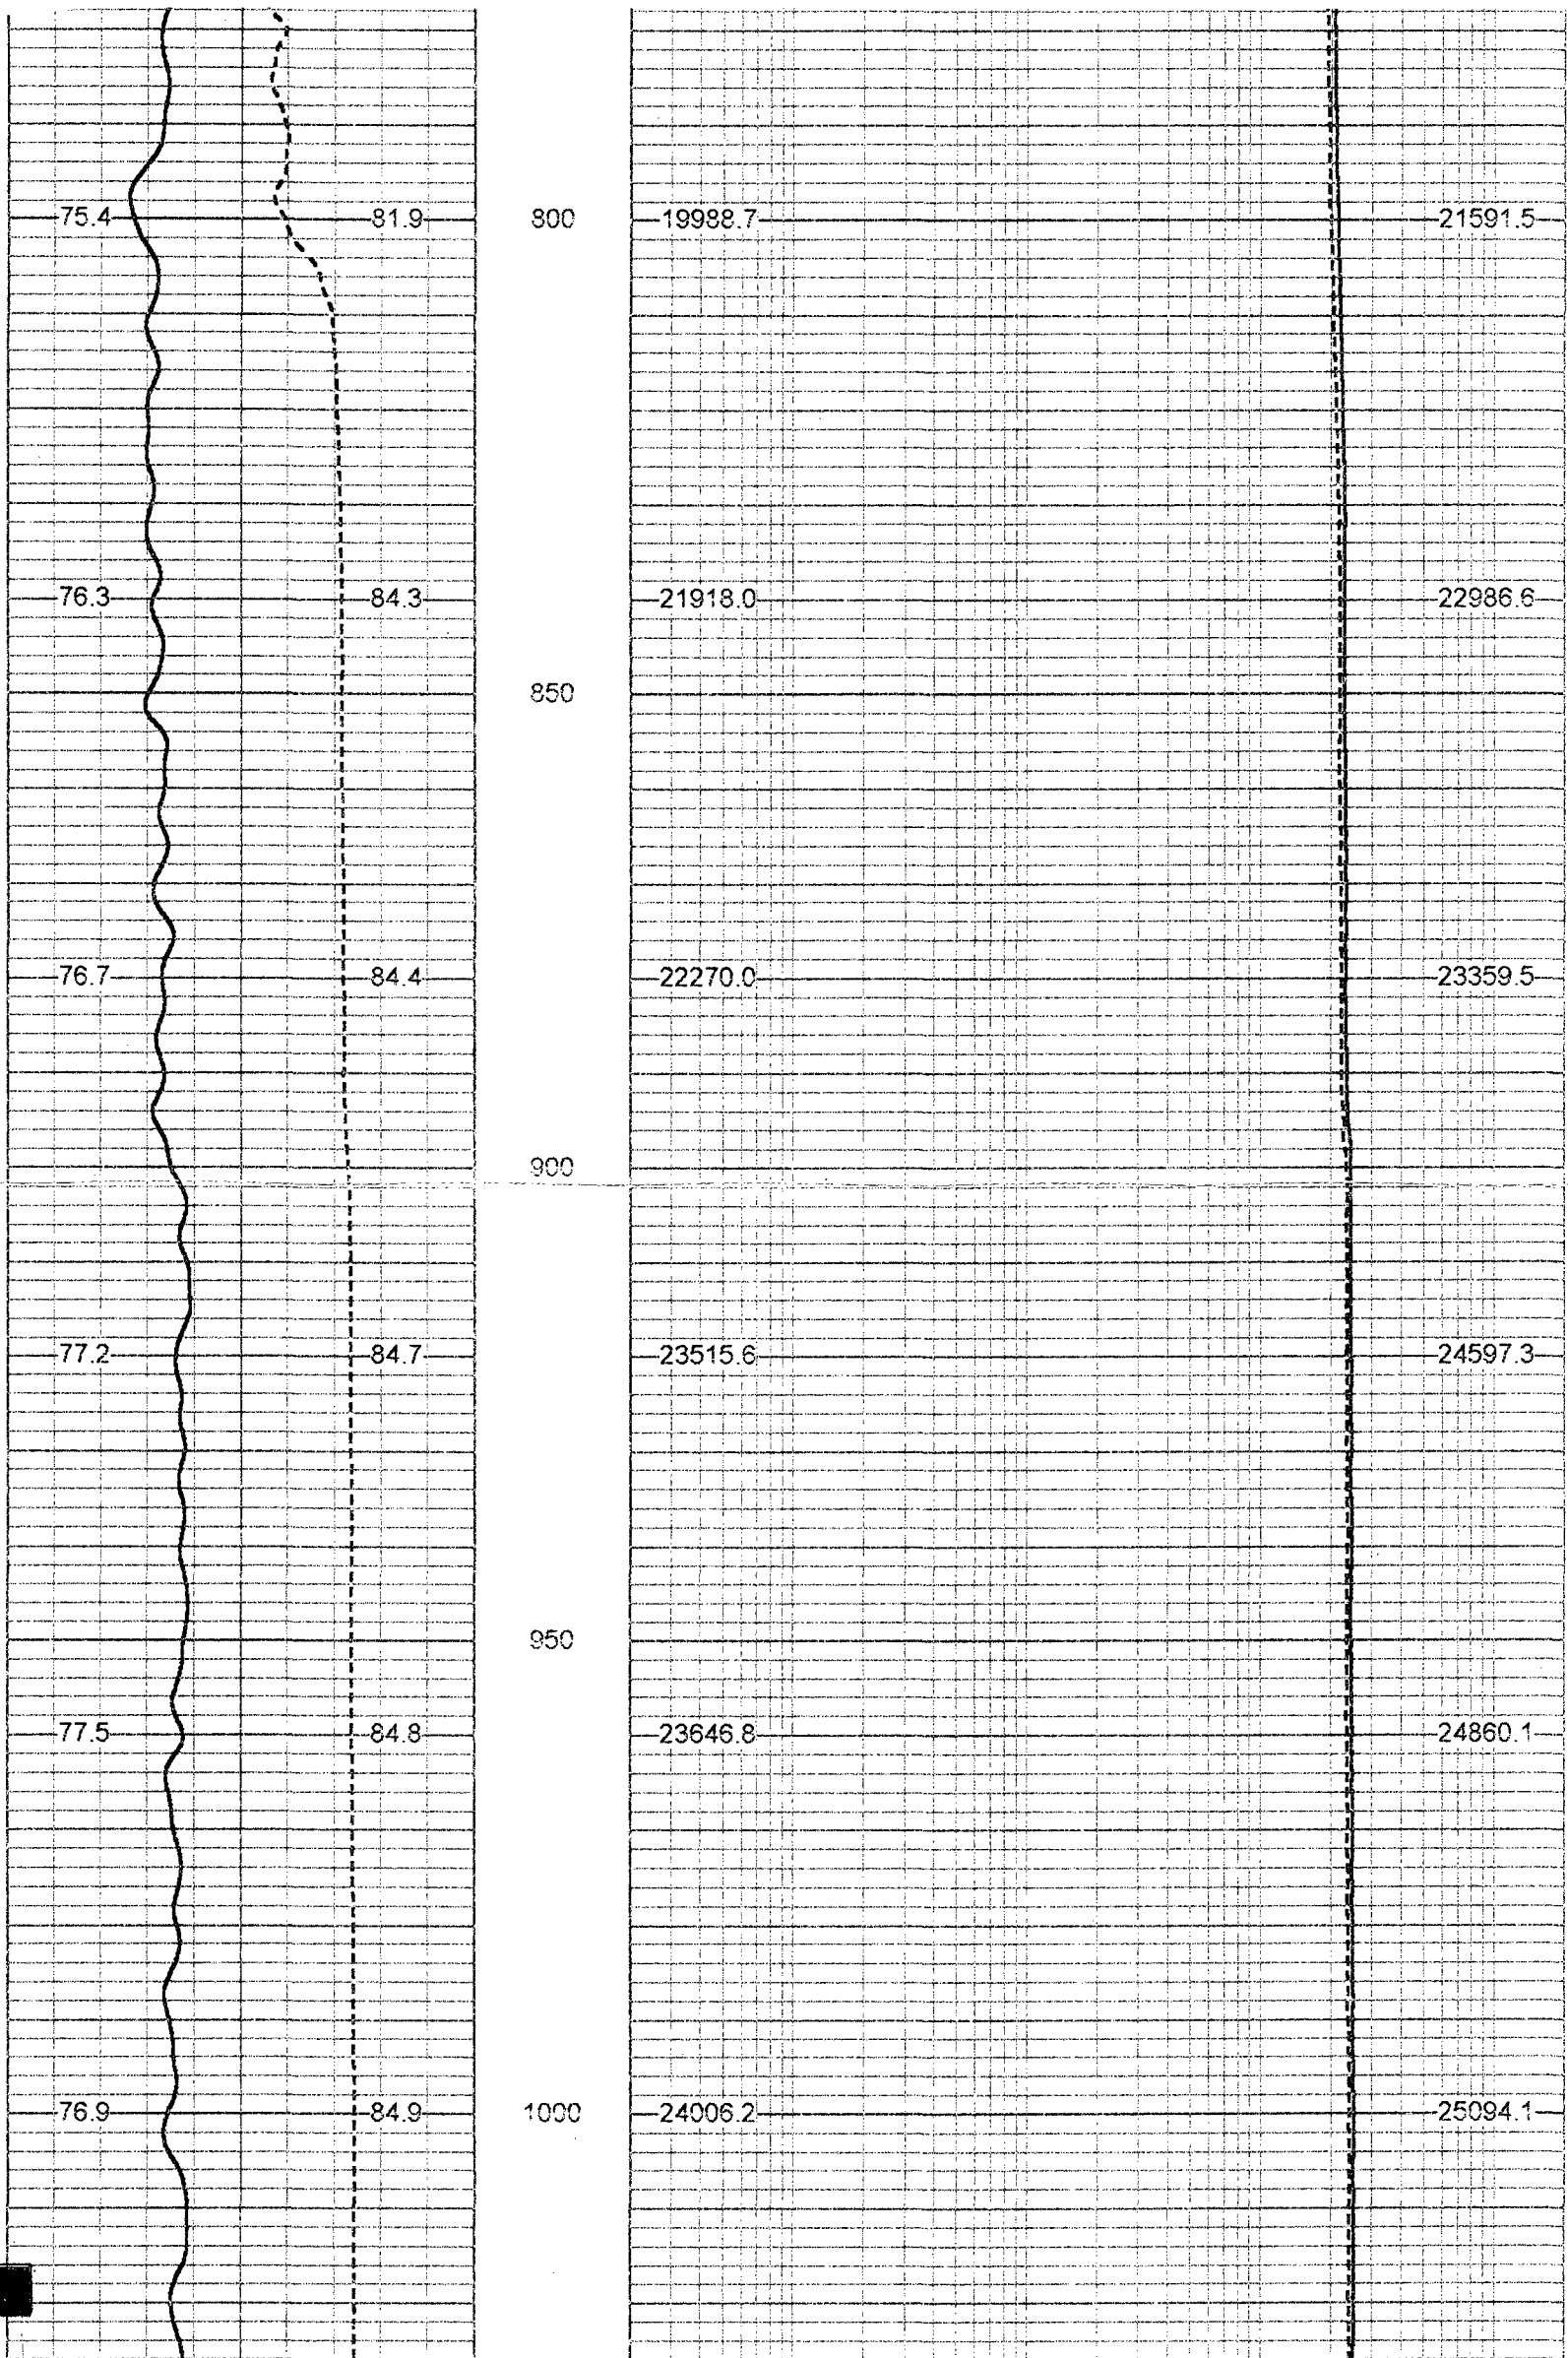


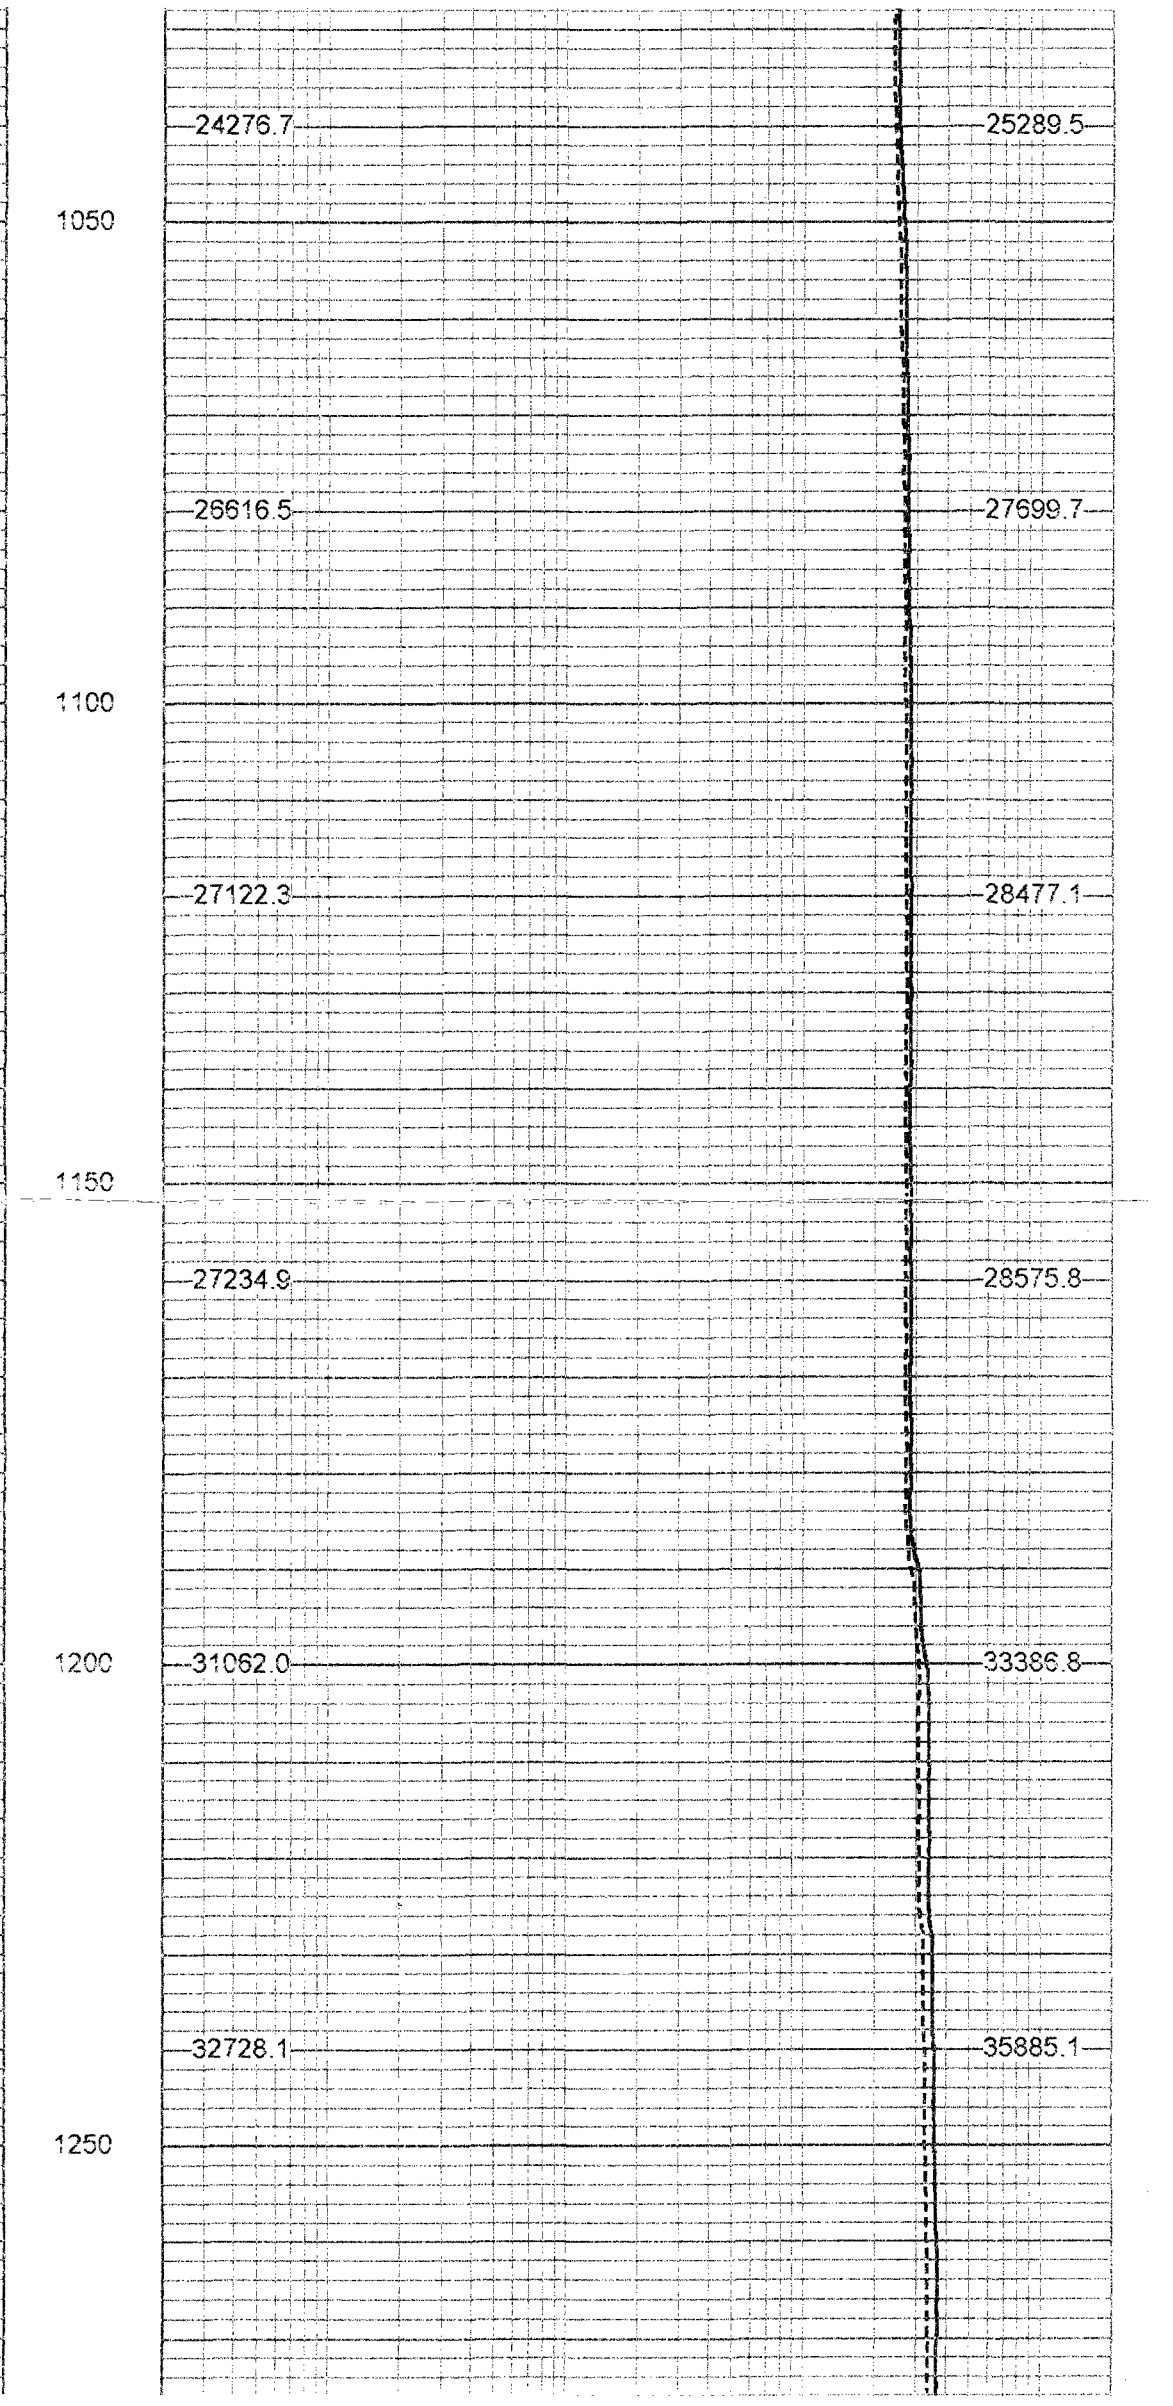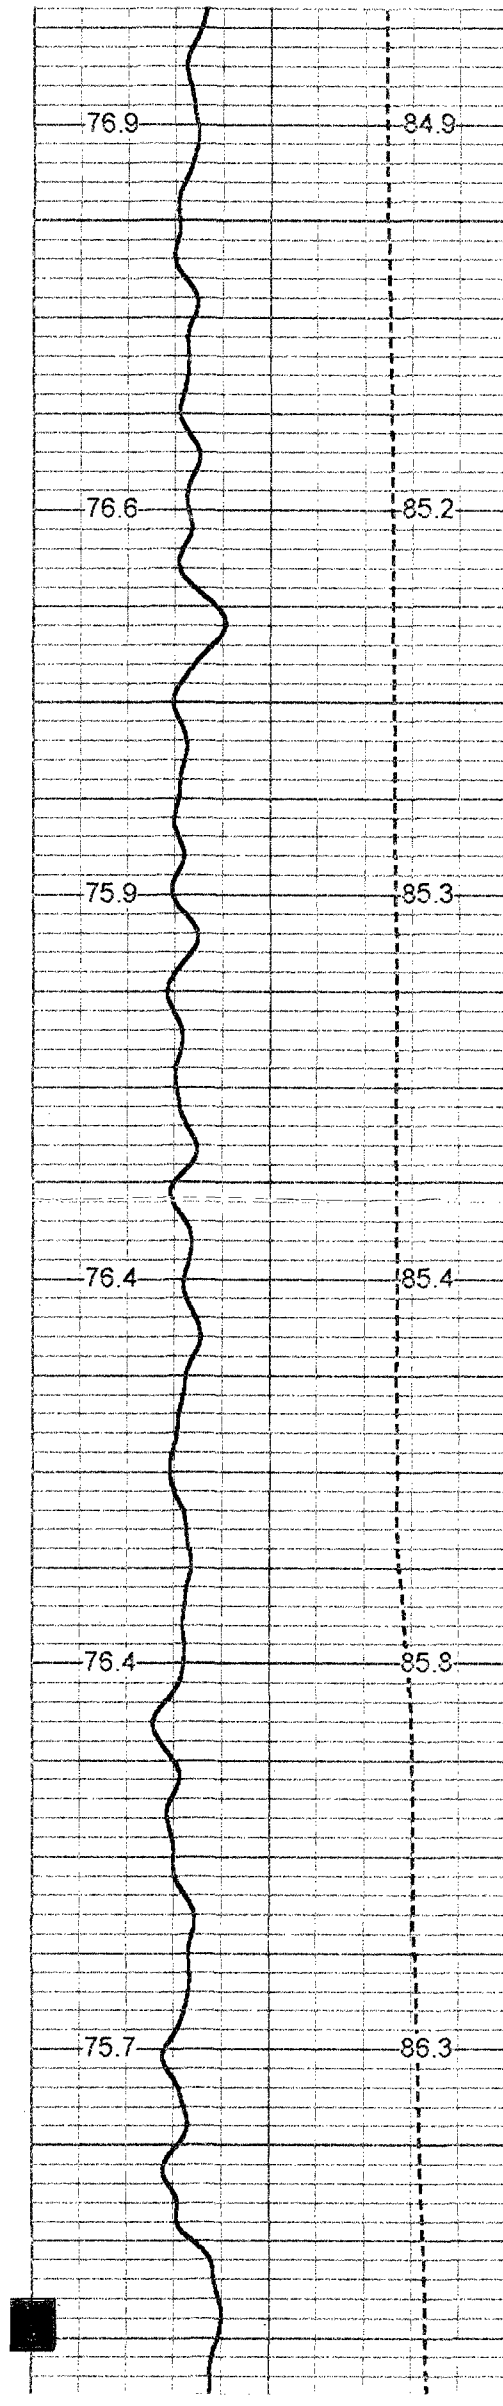

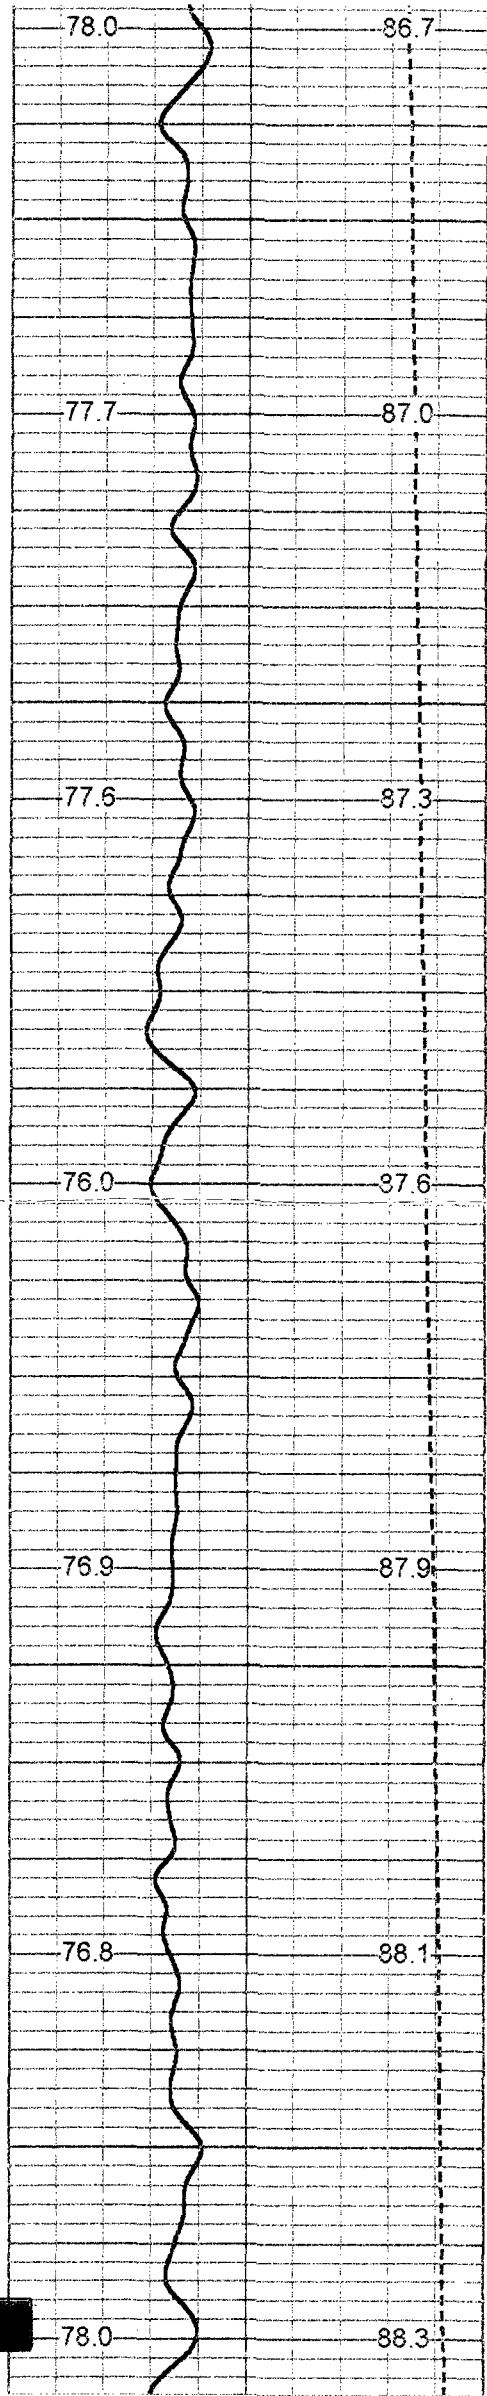

1300
1350
1400
1450
1500

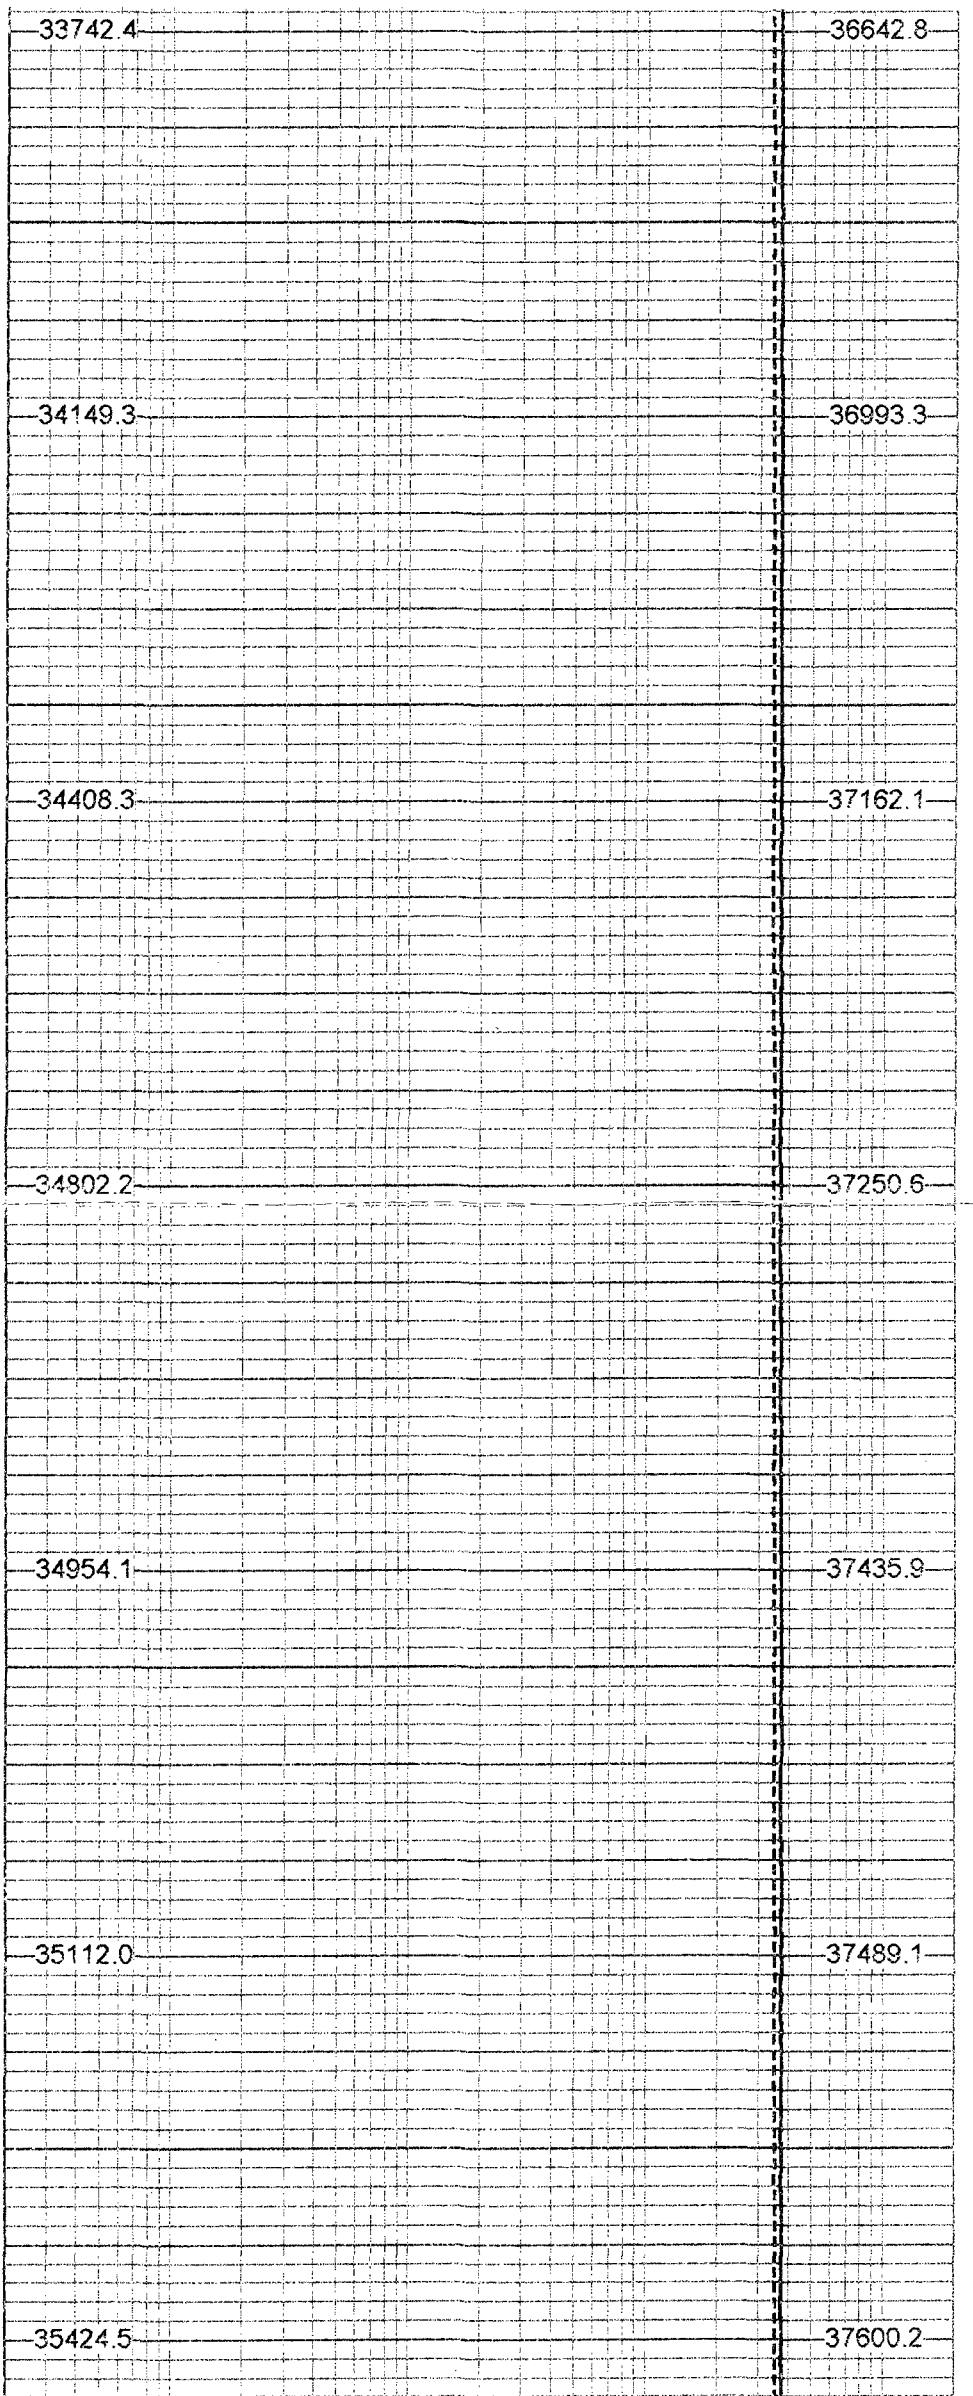

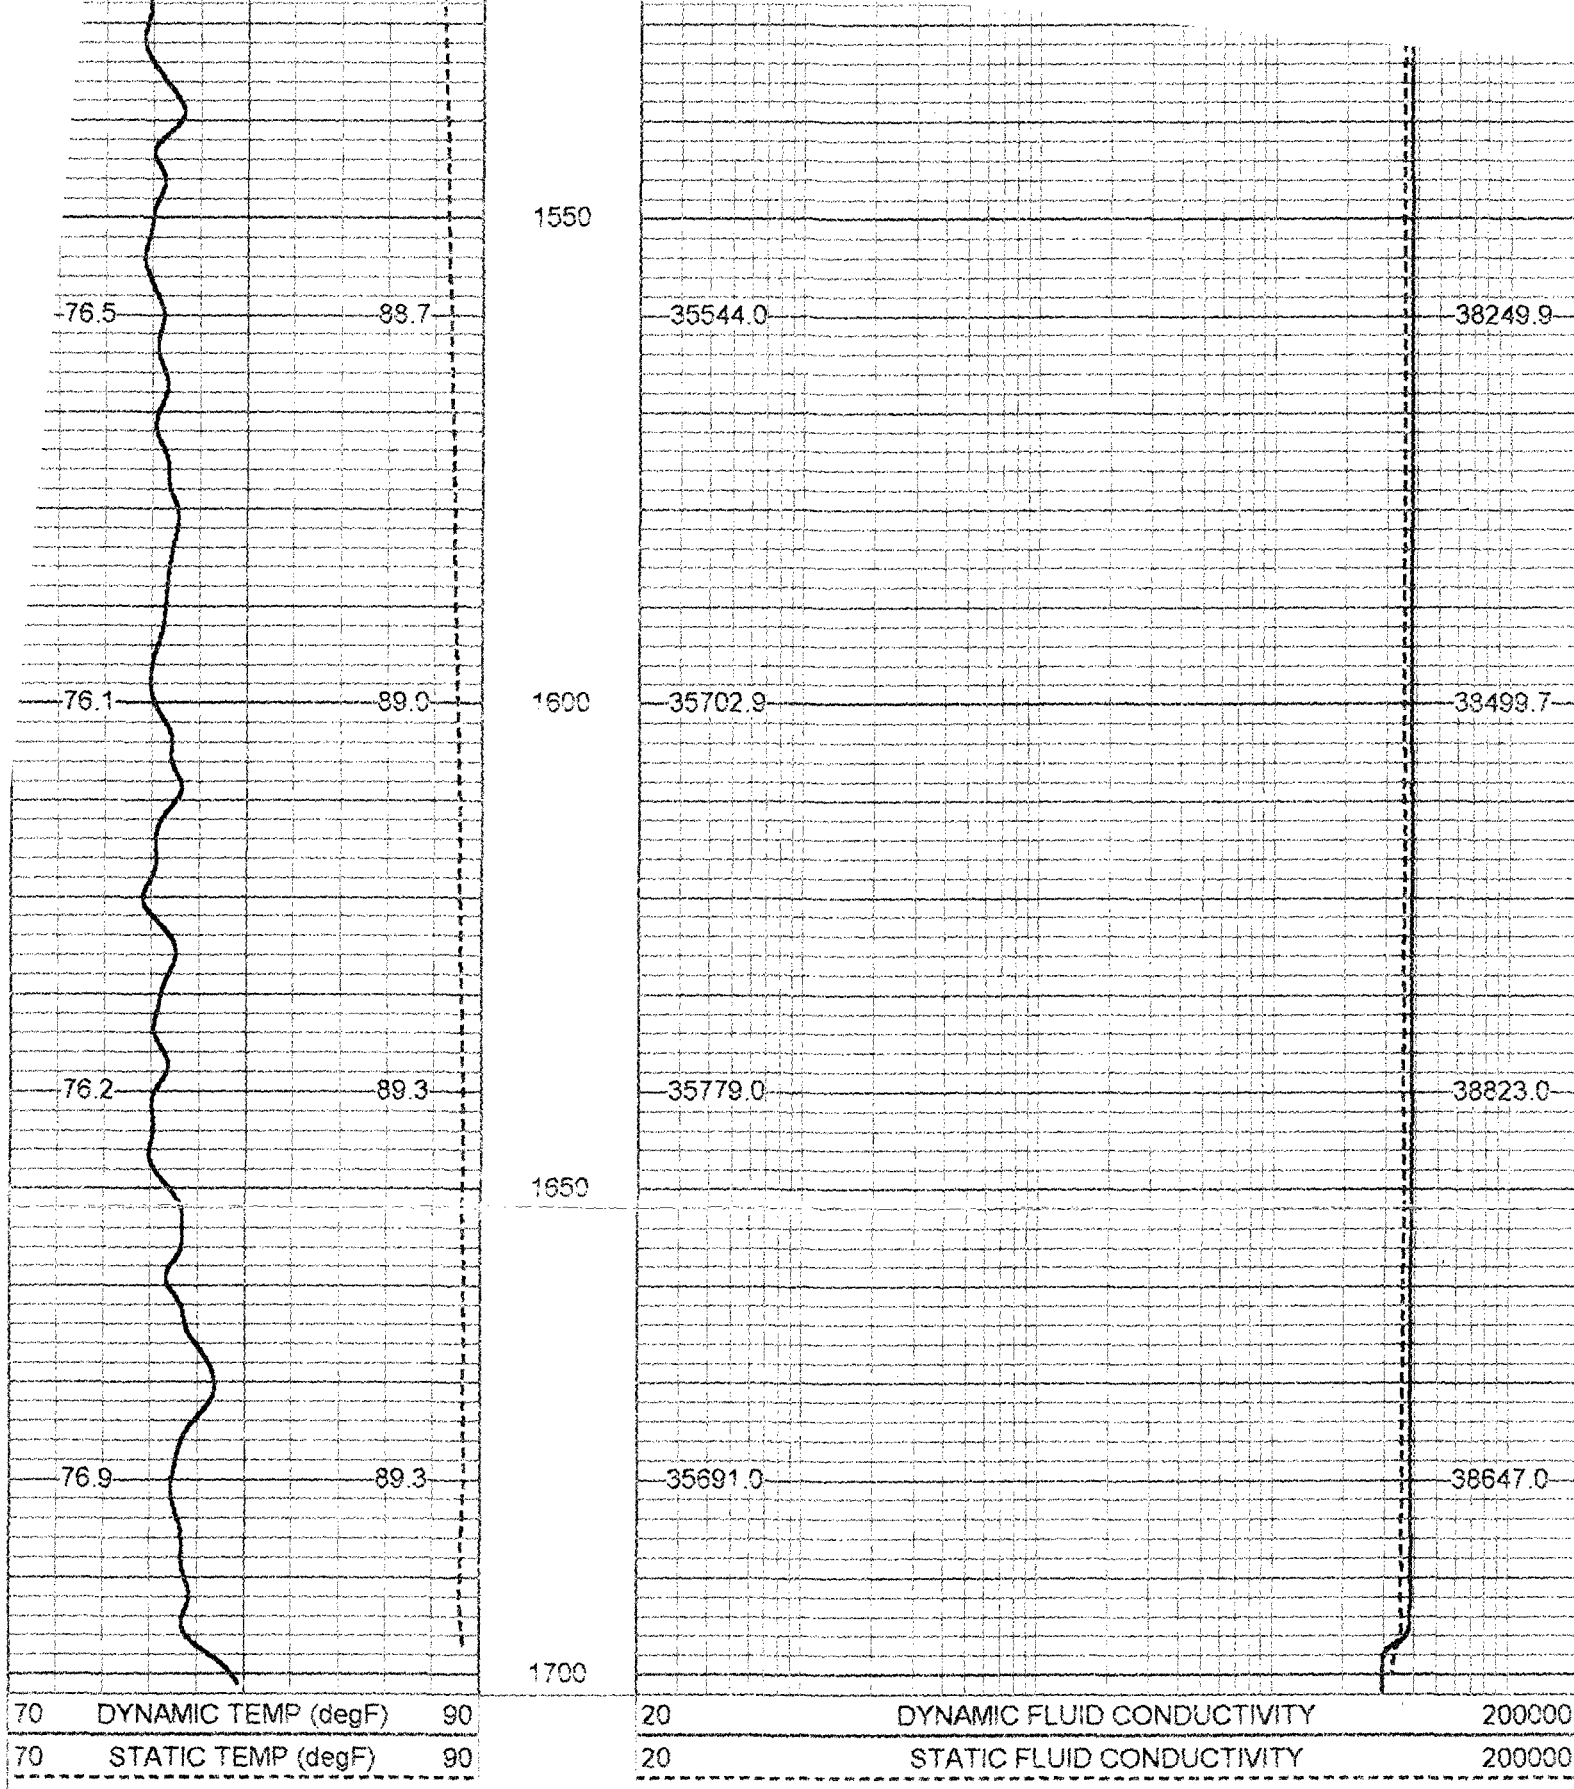

70	DYNAMIC TEMP (degF)	90	20	DYNAMIC FLUID CONDUCTIVITY	200000
70	STATIC TEMP (degF)	90	20	STATIC FLUID CONDUCTIVITY	200000

FRT Calibration Report					
Serial Number:		30			
Tool Model:		SONDEX			
Performed:		Thu Sep 02 16:02:11 1999			
Point #	Reading		Reference		
1	28.607	cps	500.000		
2	43.277	cps	1000.000		
3	419.480	cps	10000.000		
4	2384.150	cps	50000.000		
5		cps			
6		cps			

Serial Number:
Tool Model:
Performed:

30
SONDEX
Wed Sep 01 14:25:57 1999

Point #	Reading		Reference	
1	129.745	cps	35	degF
2	413.774	cps	94	degF
3	668.279	cps	145	degF

TEMP 0.70 ft
FRES 0.50 ft



TEMP-SONDEX (30) 10.00 lb 1.62 in OD 1.20 ft

FRT-SONDEX (30) 10.00 lb 1.69 in OD 0.60 ft

Dataset: run3/pass8
Total Length: 1.80 ft
Total Weight: 20.00 lb
O.D.: 1.69 in