

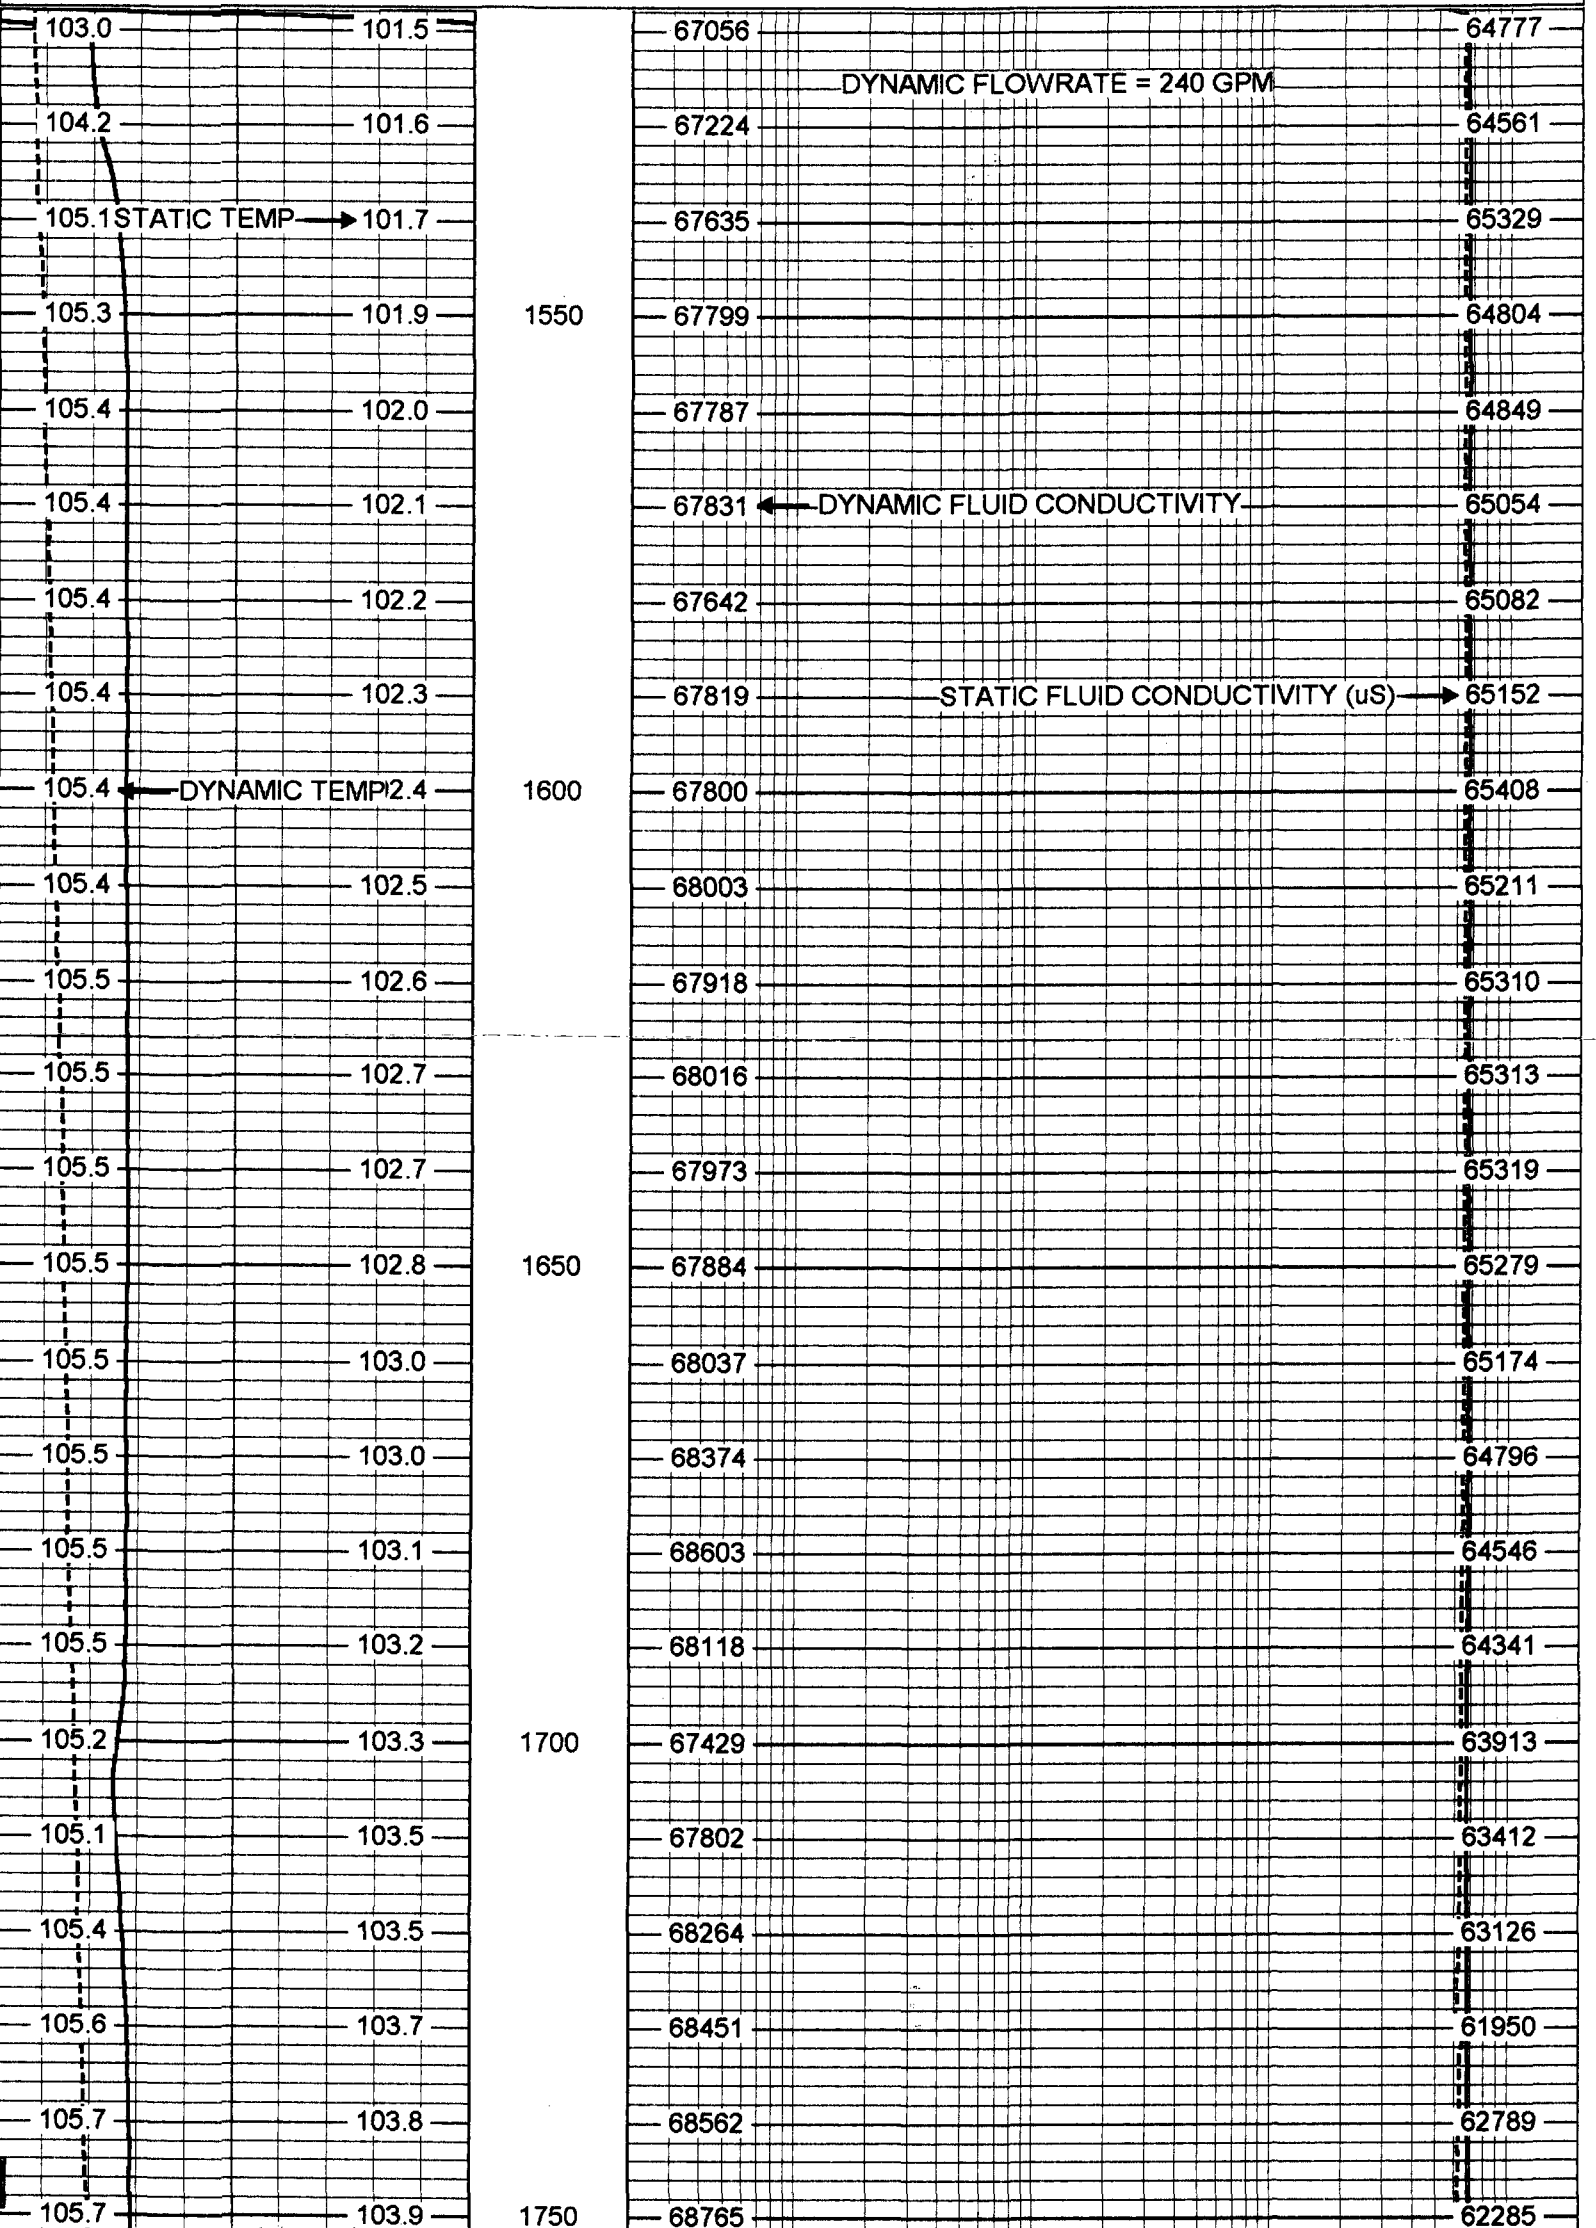




100 DYNAMIC TEMP (degF) 120
 100 STATIC TEMP (degF) 120


20 DYNAMIC FLUID CONDUCTIVITY (uS) 200000
 20 STATIC FLUID CONDUCTIVITY (uS) 200000

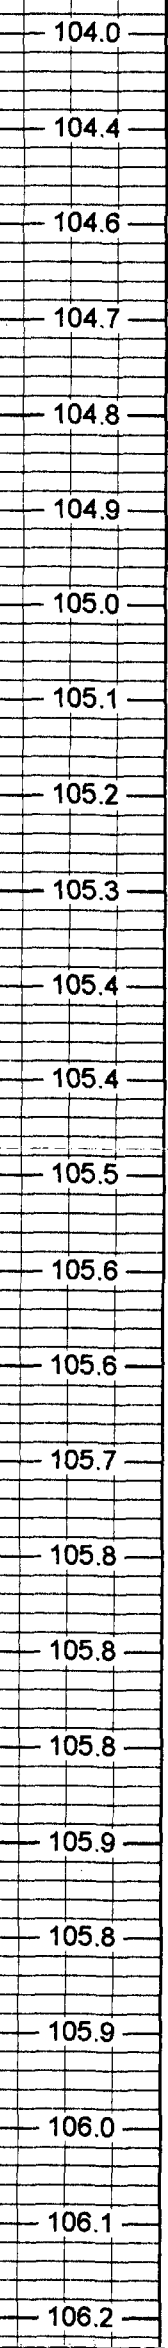

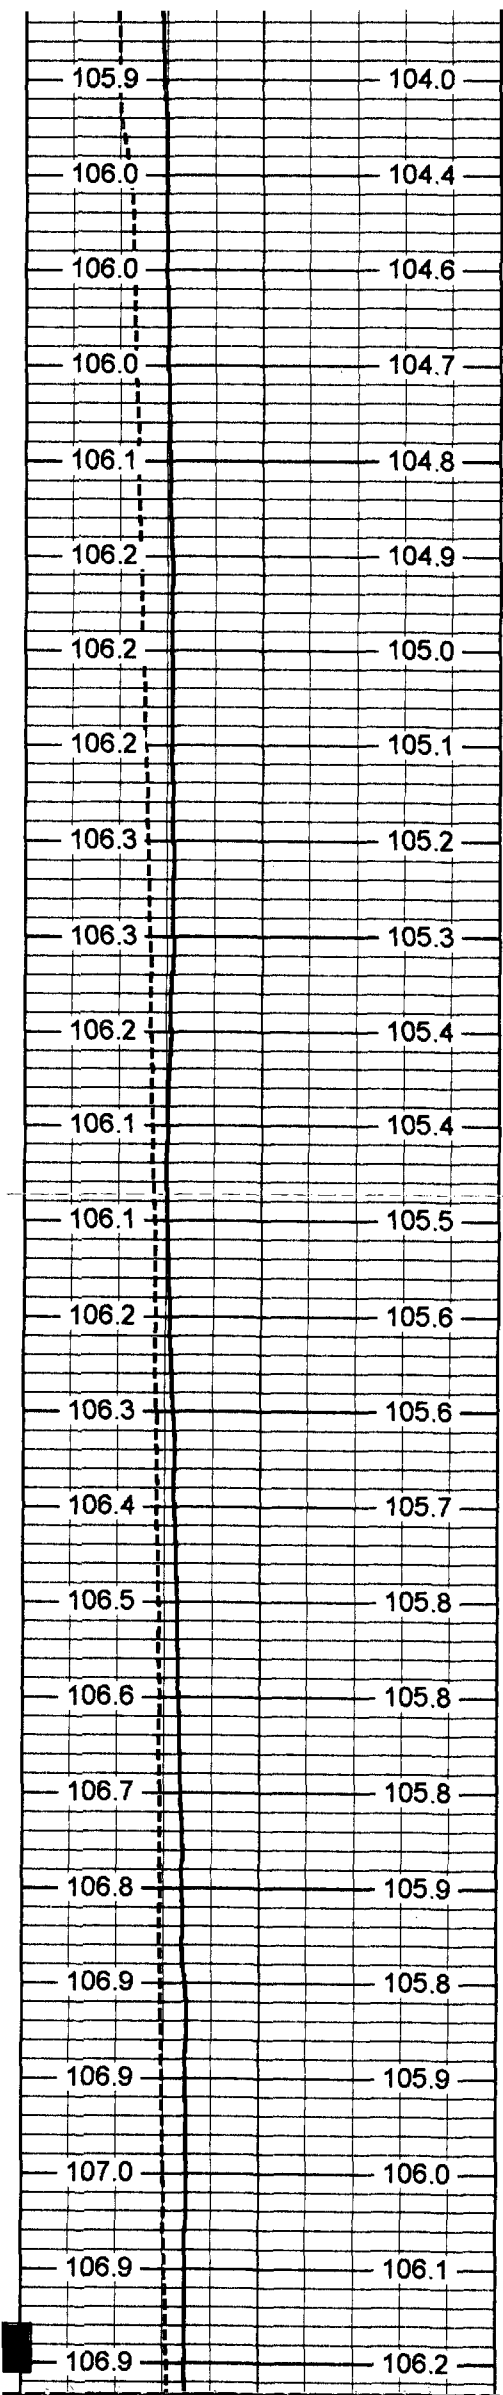



1800
1850
1900
1950
2000

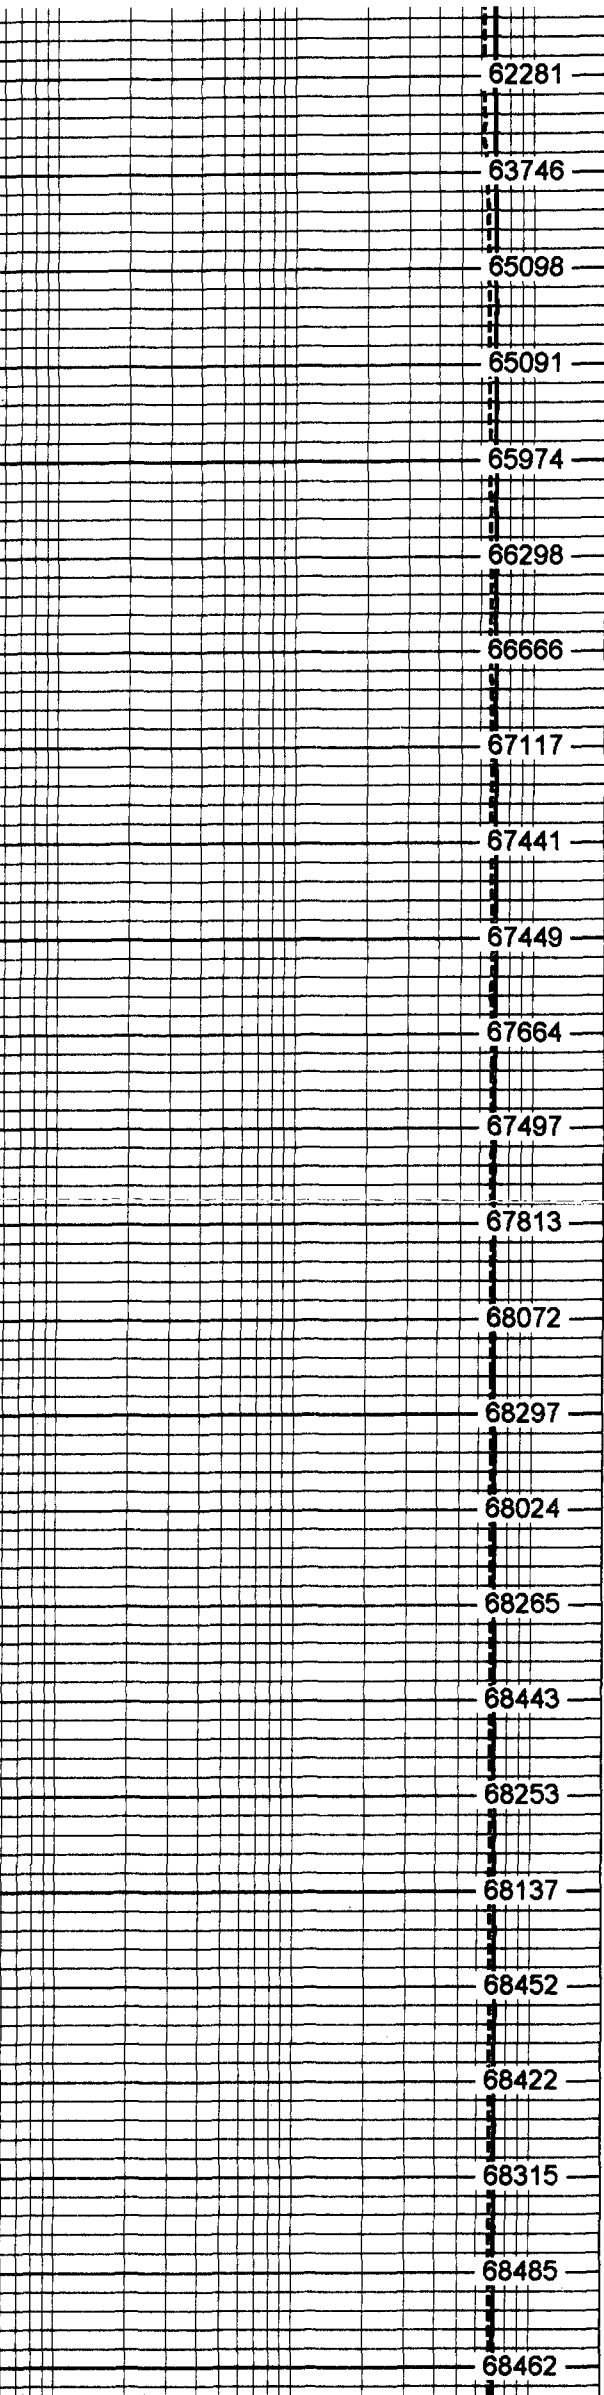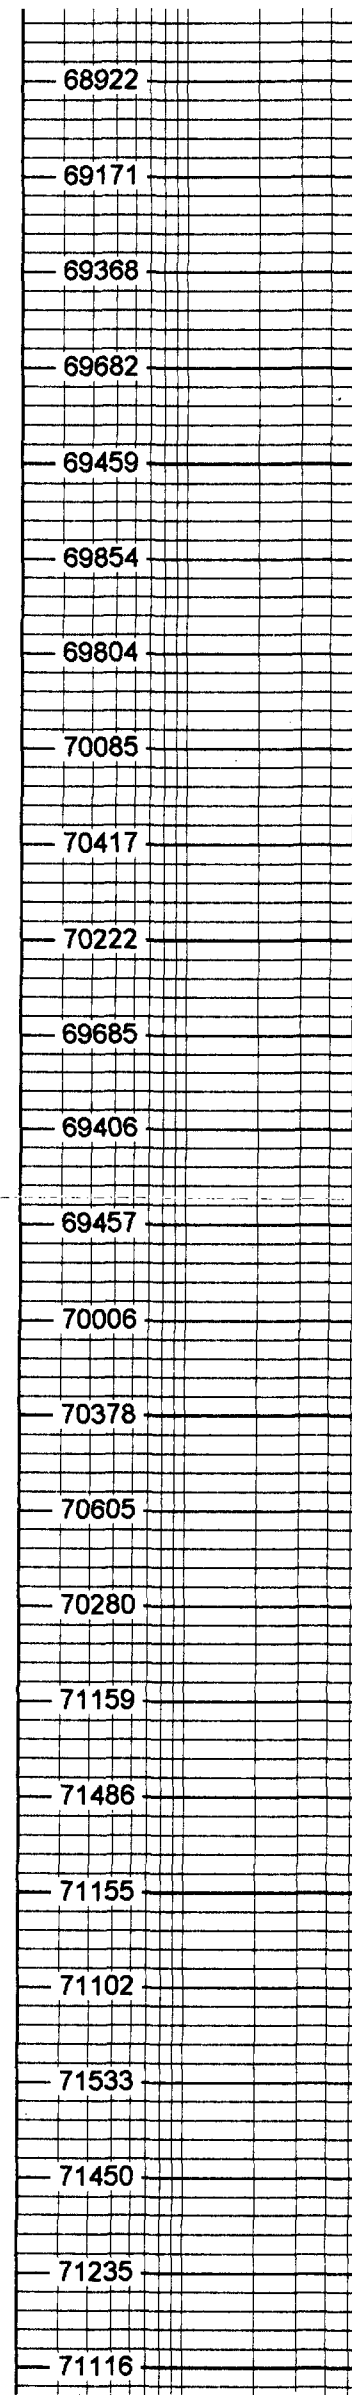

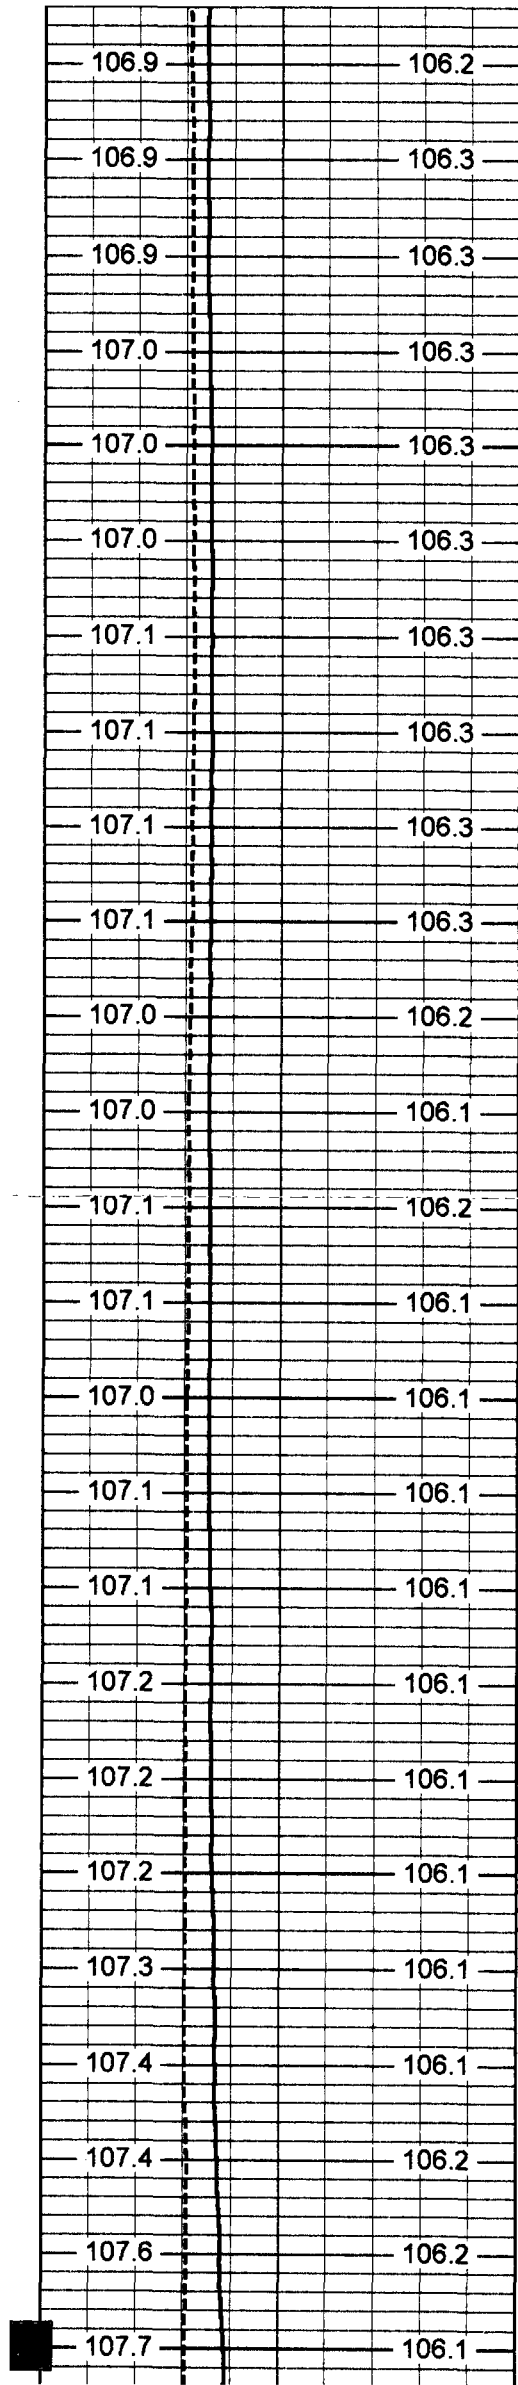



2050
2100
2150
2200
2250

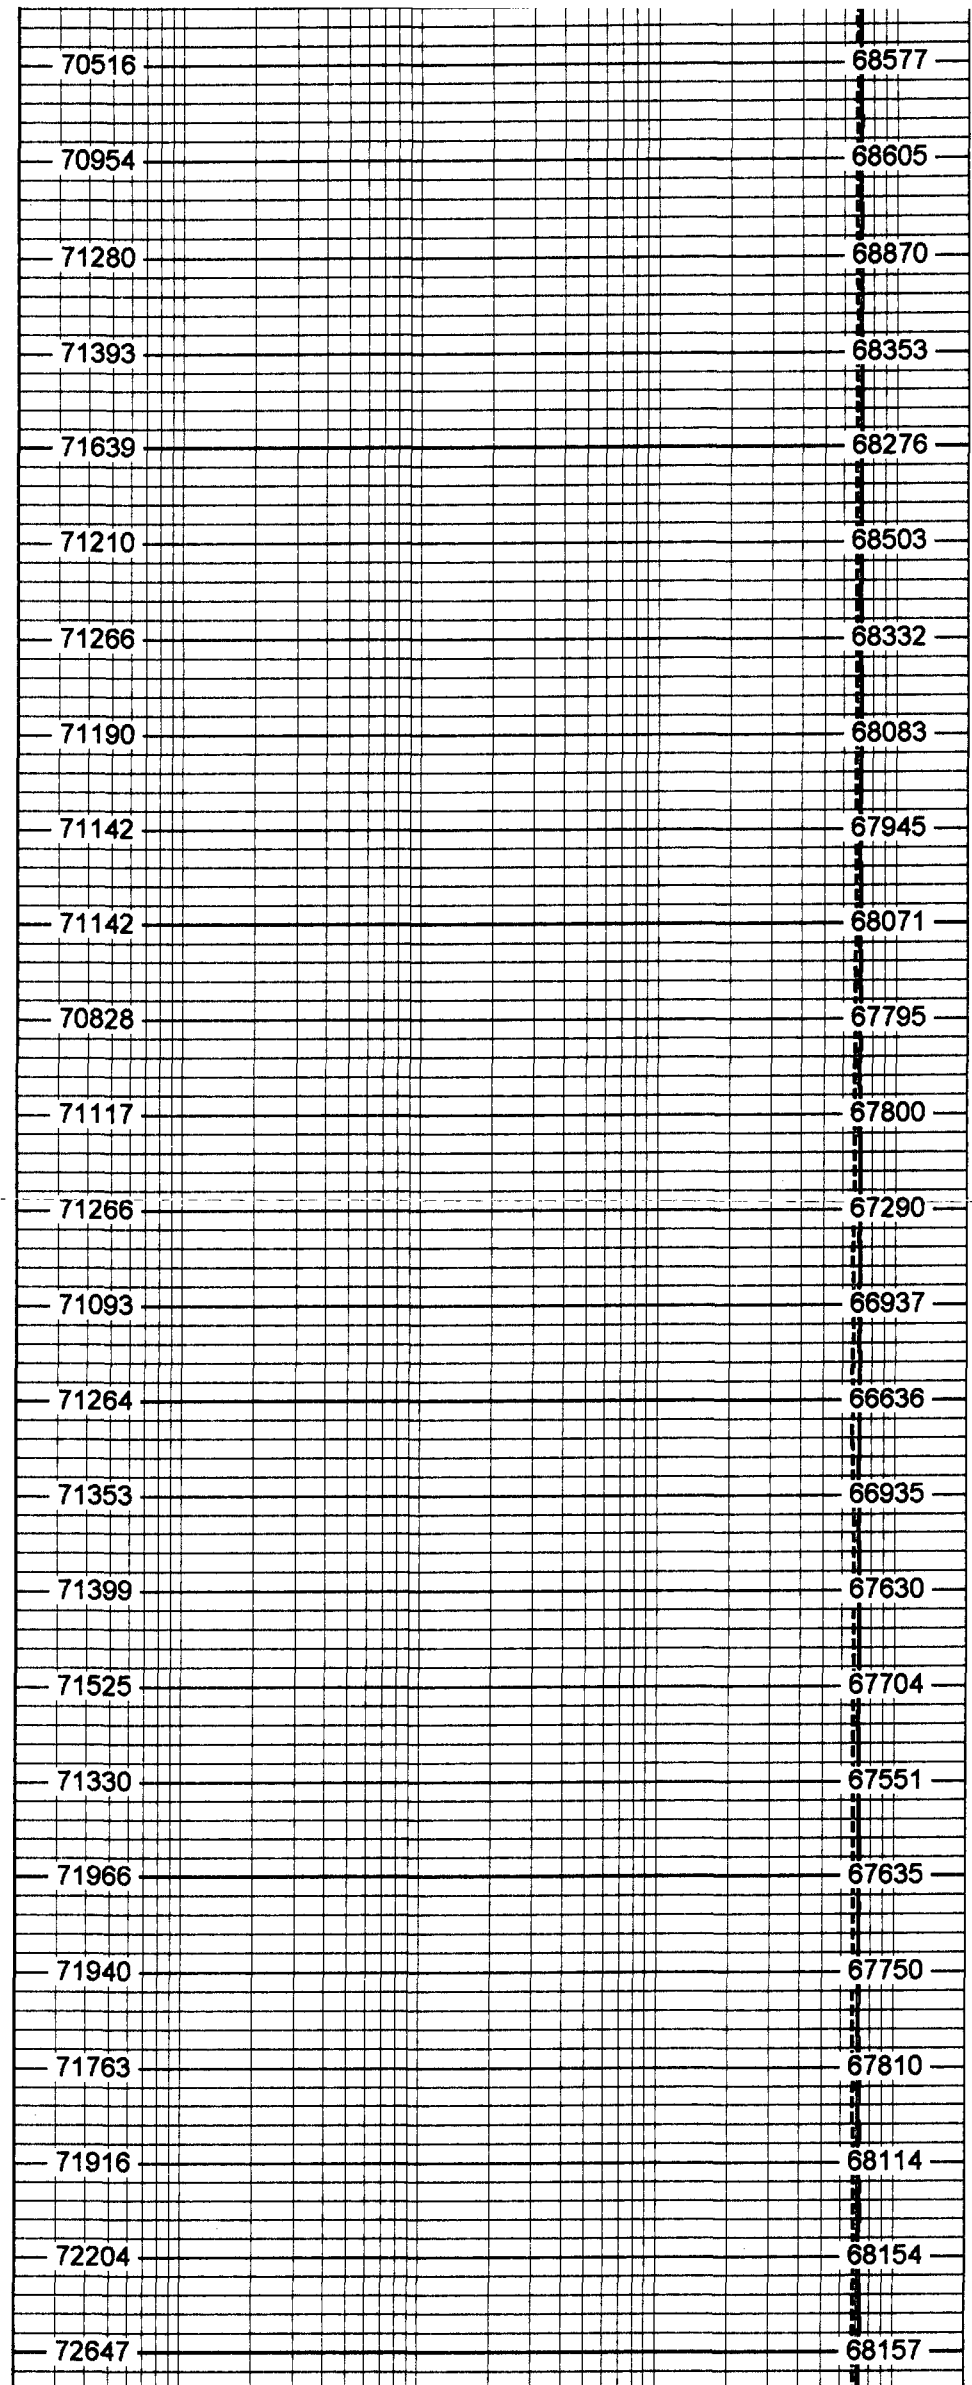

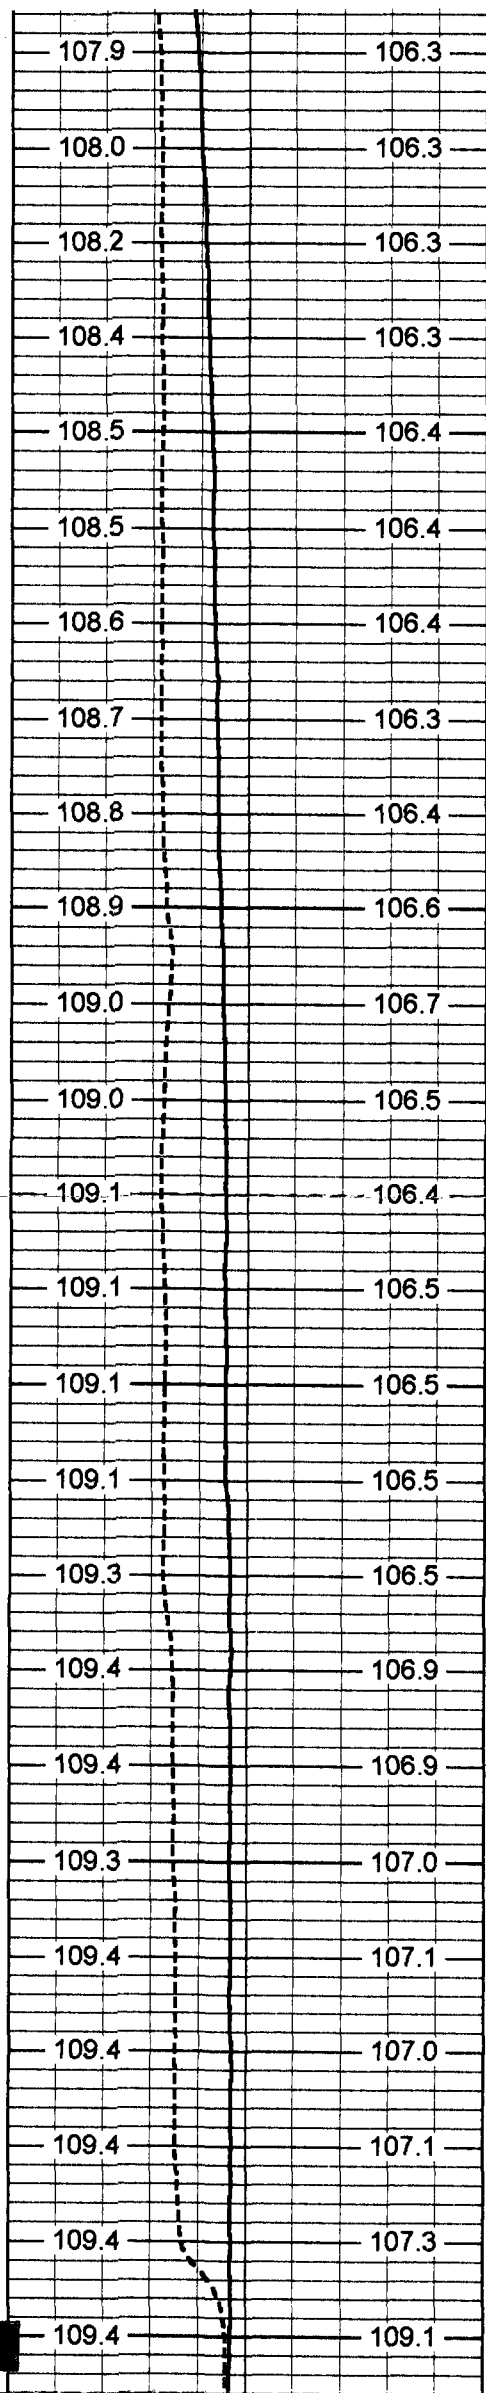

2300
2350
2400
2450
2500

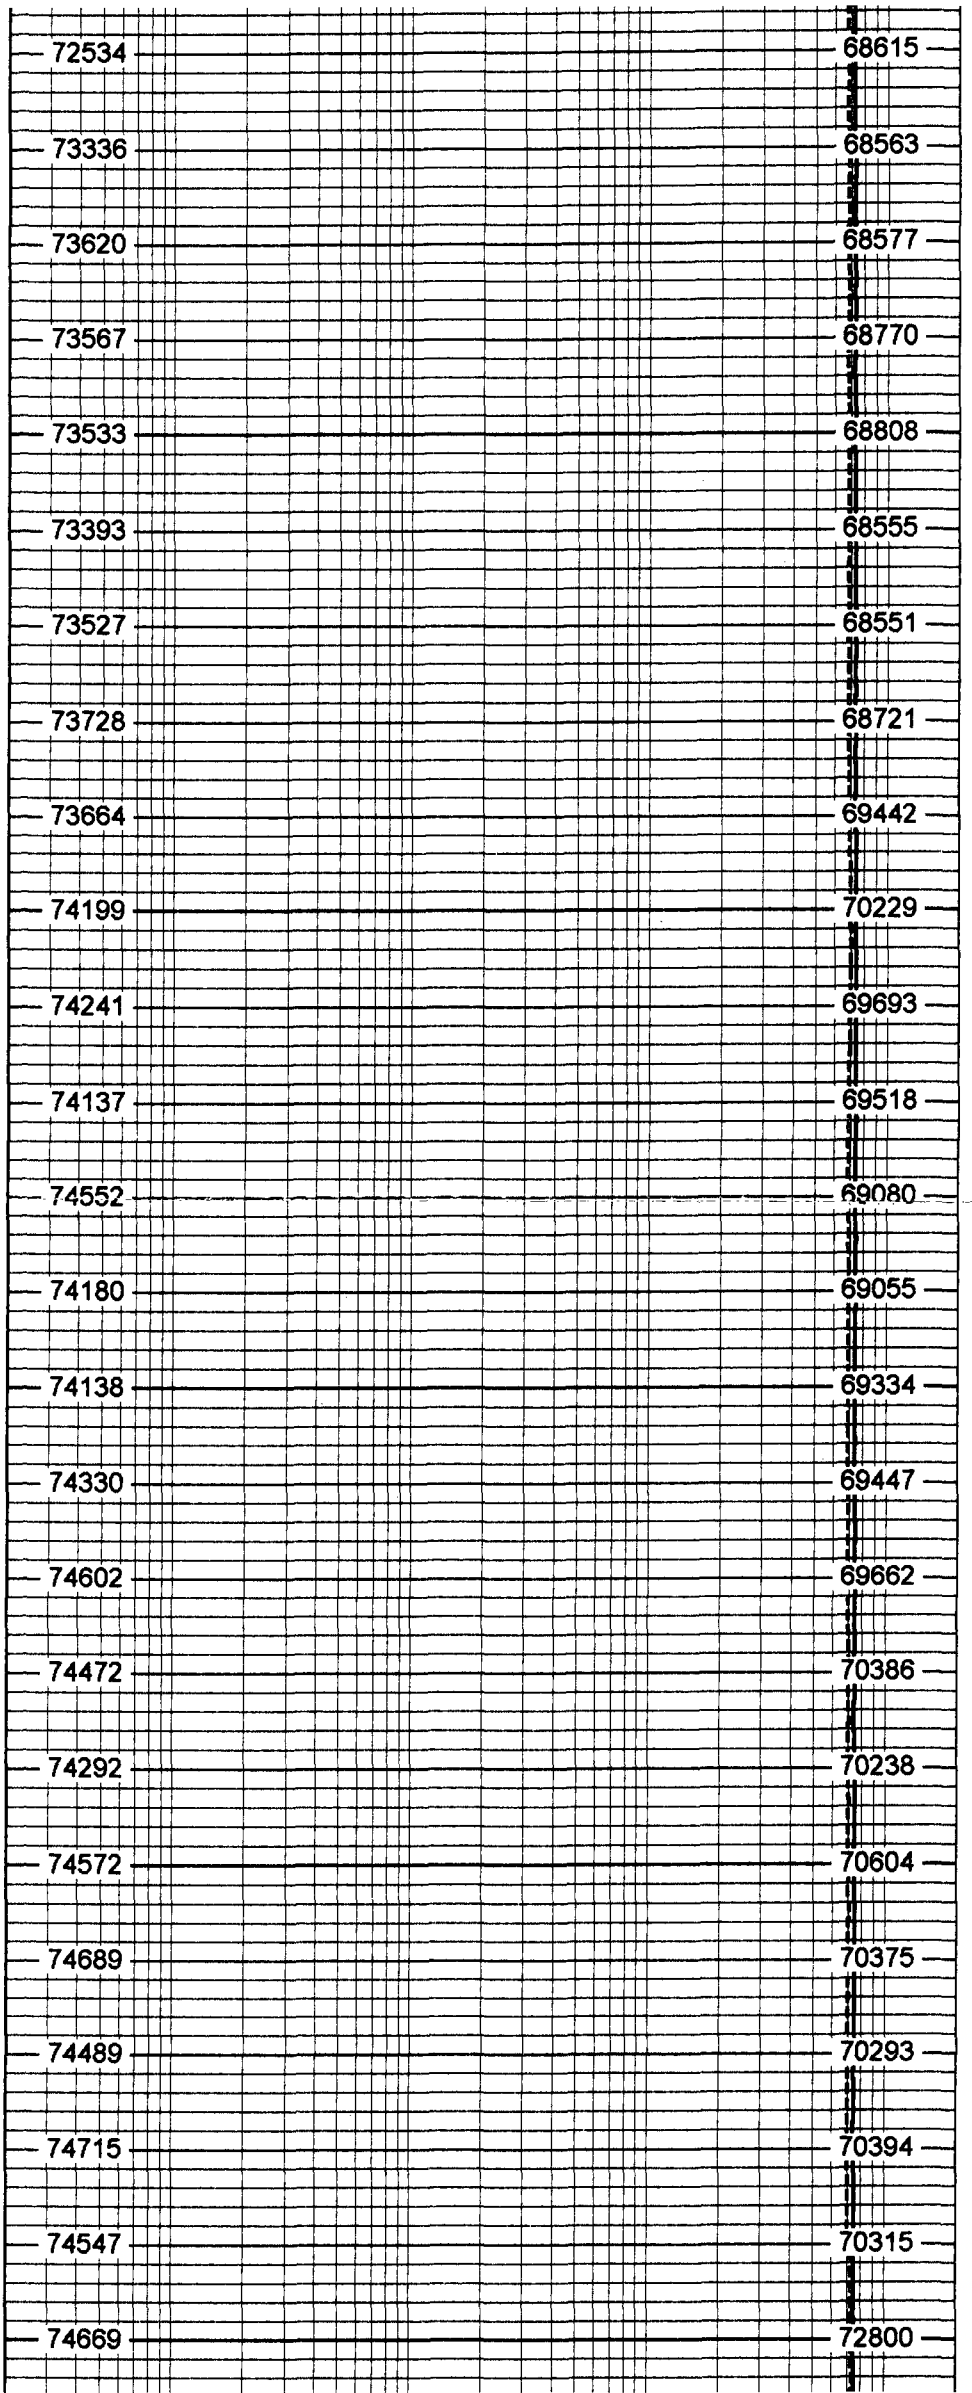

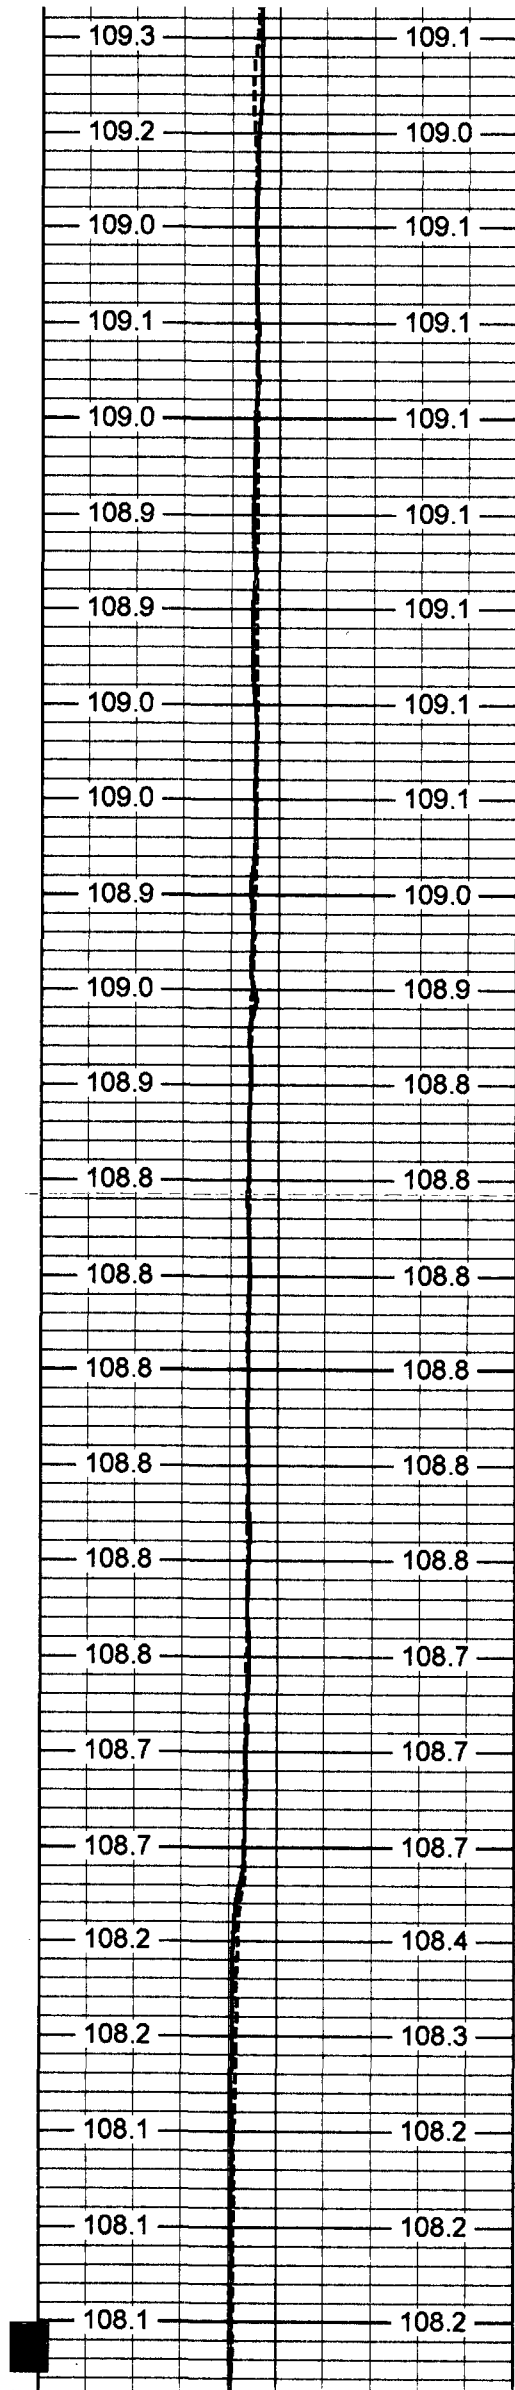


2550



2600

2650

2700

2750

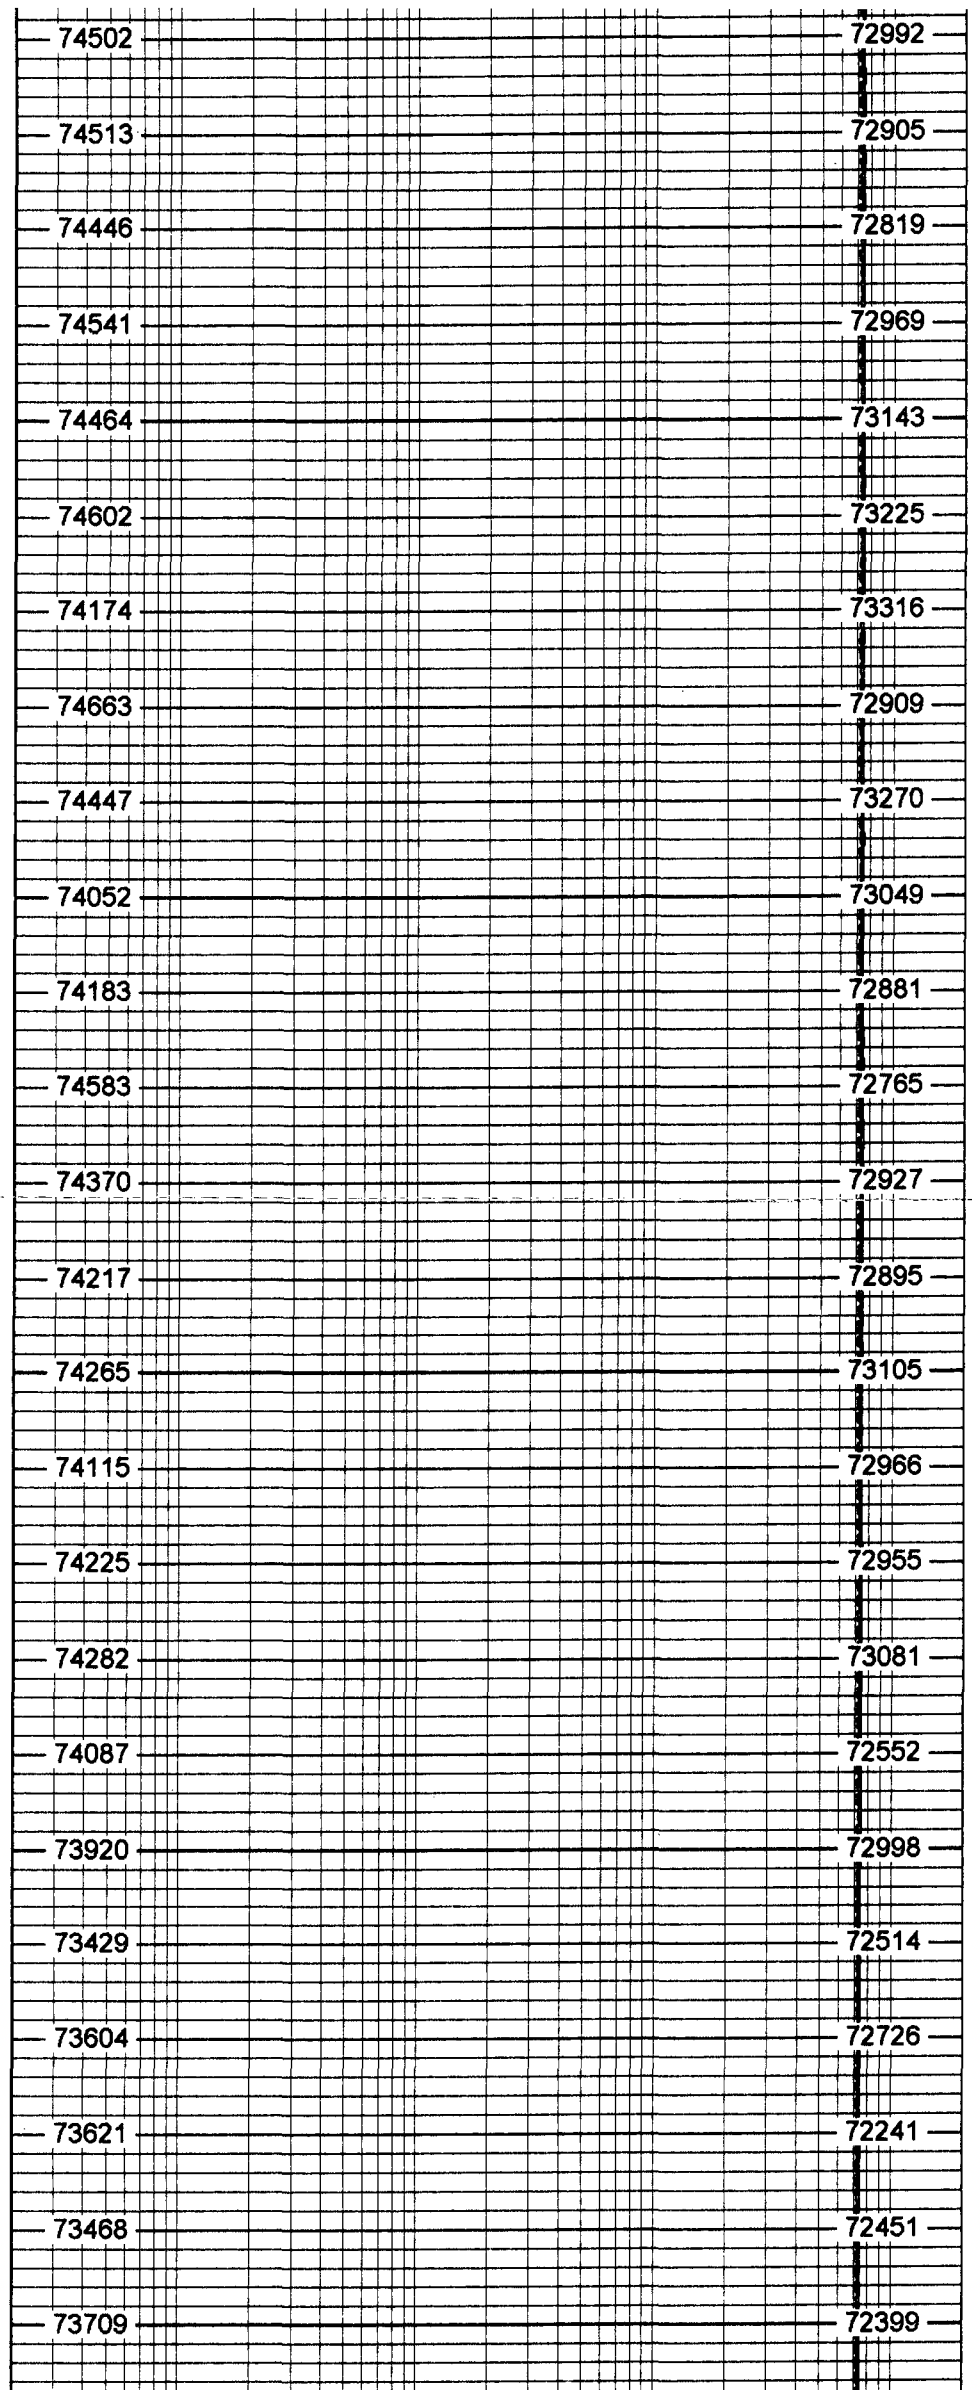

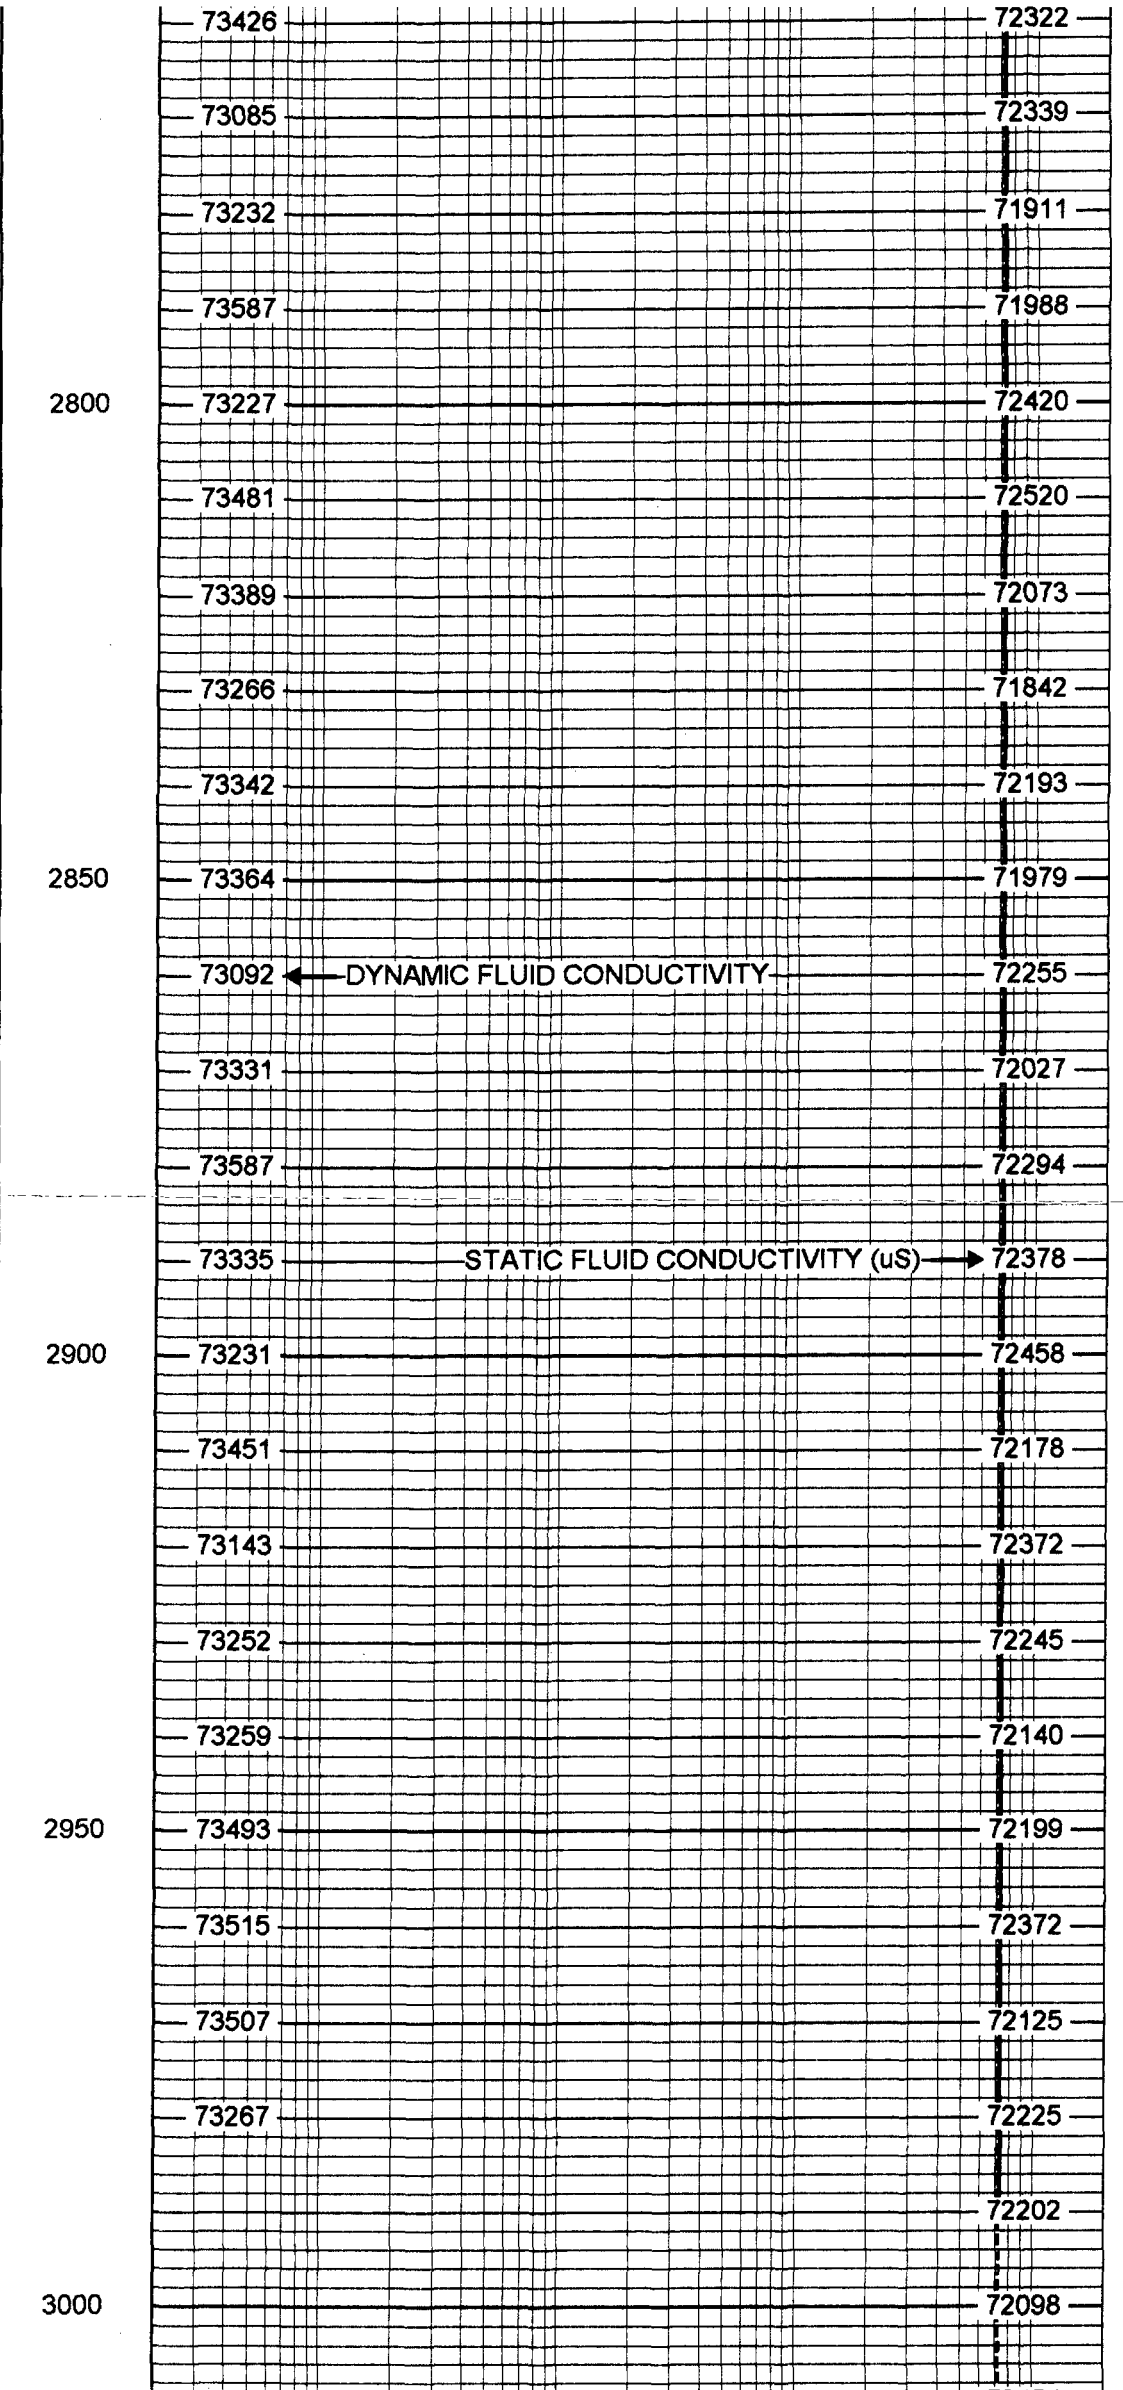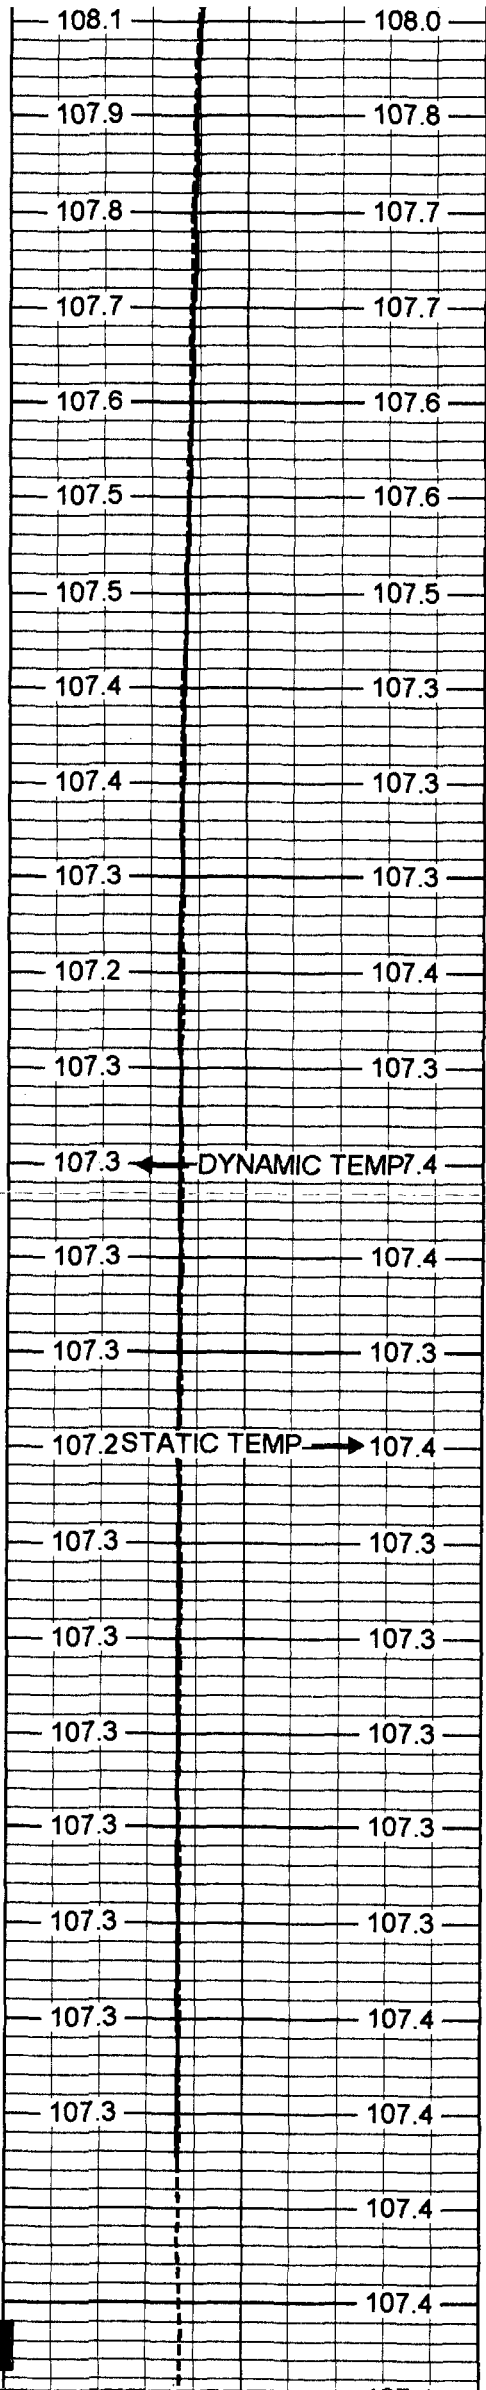

100	DYNAMIC TEMP (degF)	120
100	STATIC TEMP (degF)	120

20	DYNAMIC FLUID CONDUCTIVITY (uS)	200000
20	STATIC FLUID CONDUCTIVITY (uS)	200000

FRT Calibration Report

Serial Number: 31
 Tool Model: SONDEX
 Performed: Thu Apr 22 09:03:45 2004

Point #	Reading		Reference
1	30.817	cps	1000.000
2	171.328	cps	10000.000
3	445.517	cps	25000.000
4	965.867	cps	50000.000
5		cps	
6		cps	

Temperature Calibration Report

Serial Number: 31
 Tool Model: SONDEX
 Performed: Thu Apr 22 09:31:10 2004

Point #	Reading		Reference	
1	128.595	cps	41	degF
2	265.557	cps	70	degF
3	697.393	cps	156	degF

