

1650

1700

1750

1800

1850

100.5

100.5

100.8

100.9

100.9

101.0

101.1


101.2

101.3

101.4

101.5

101.7

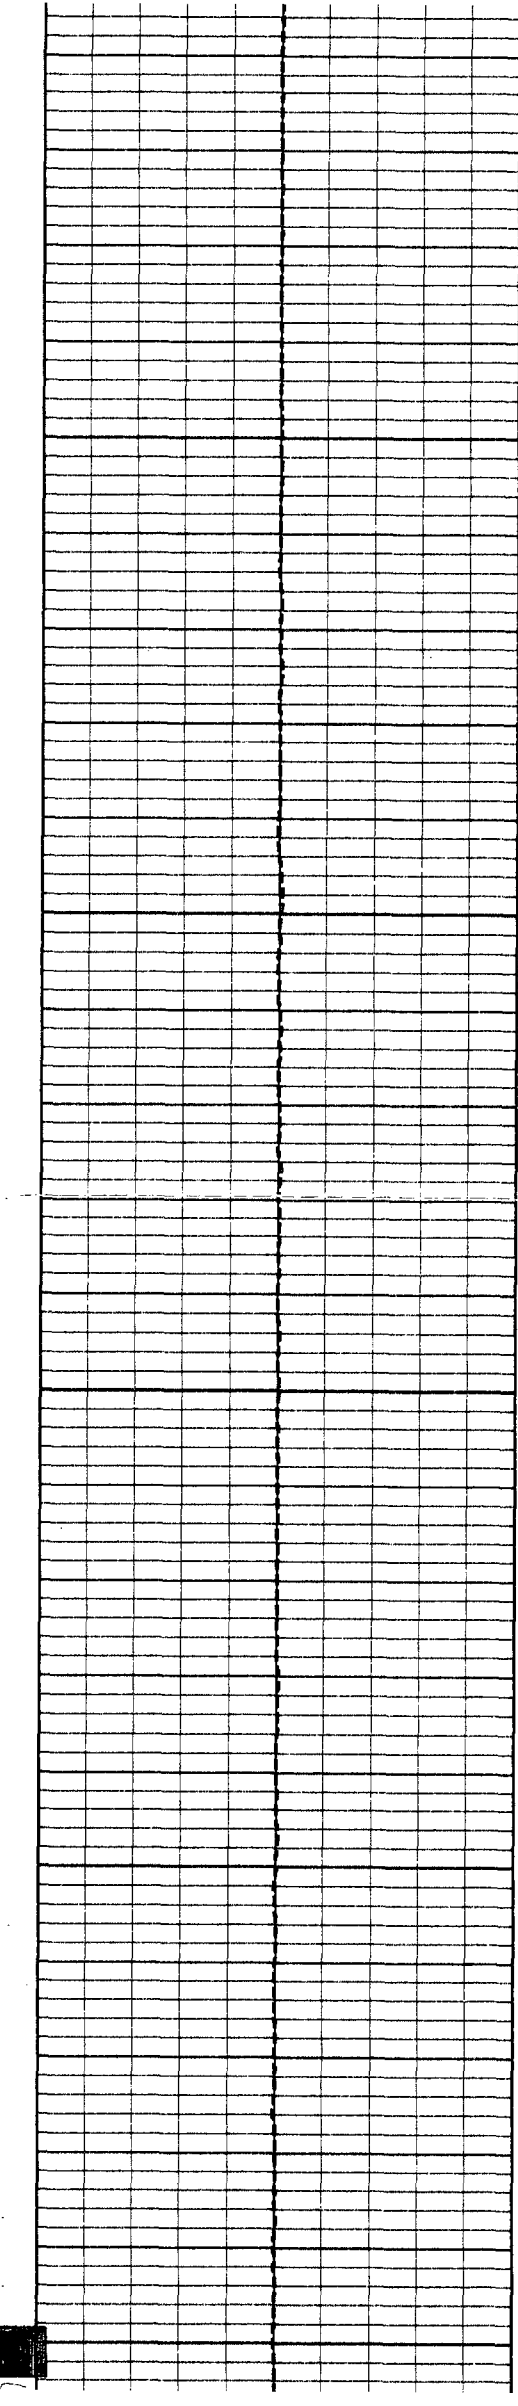

1900

1950

2000

2050

2100

101.8

101.9

102.0

102.1

102.2

102.3

102.4

102.5


102.6

102.8

102.8

102.9

102.9

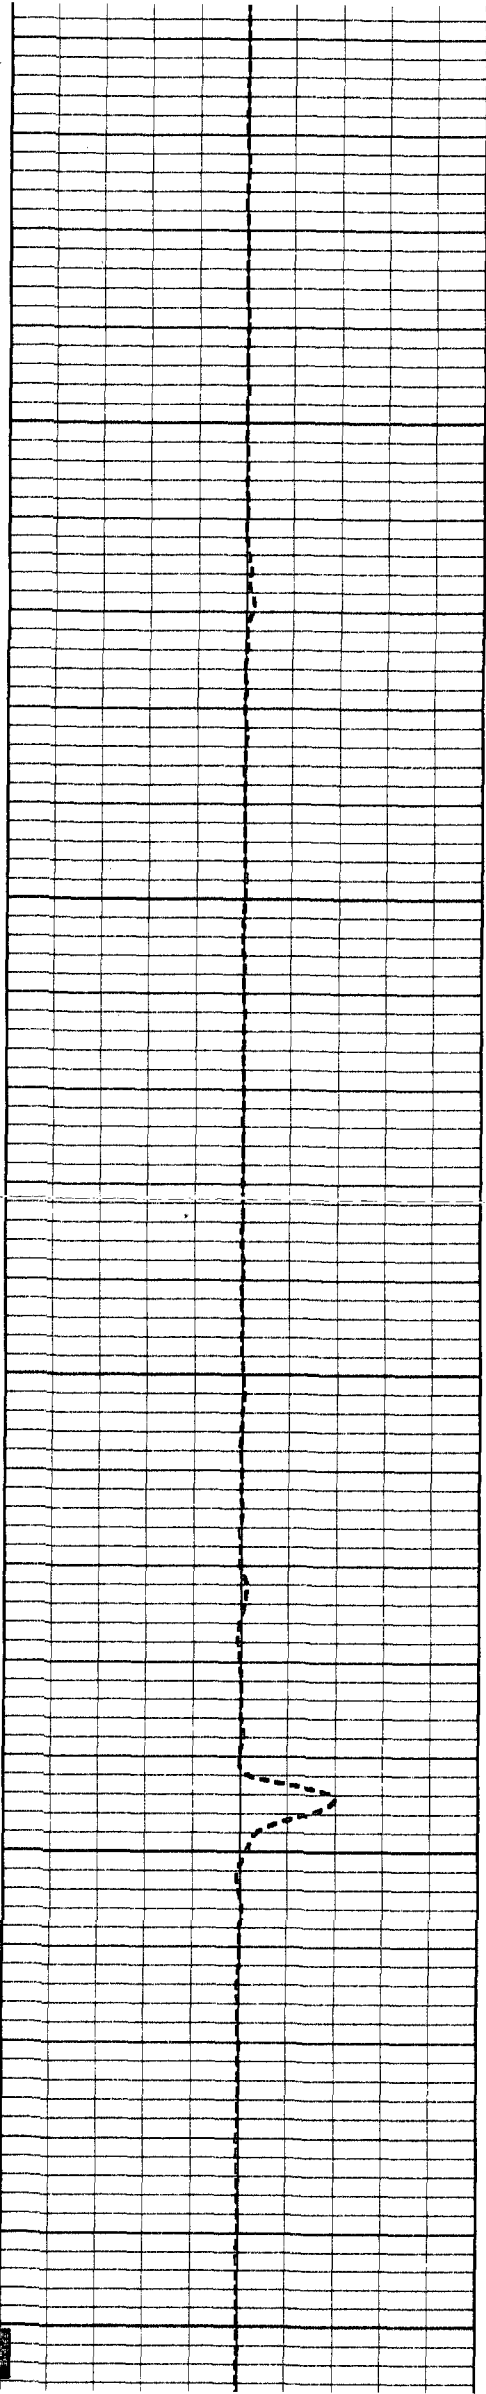


2150

2200

2250

2300

2350

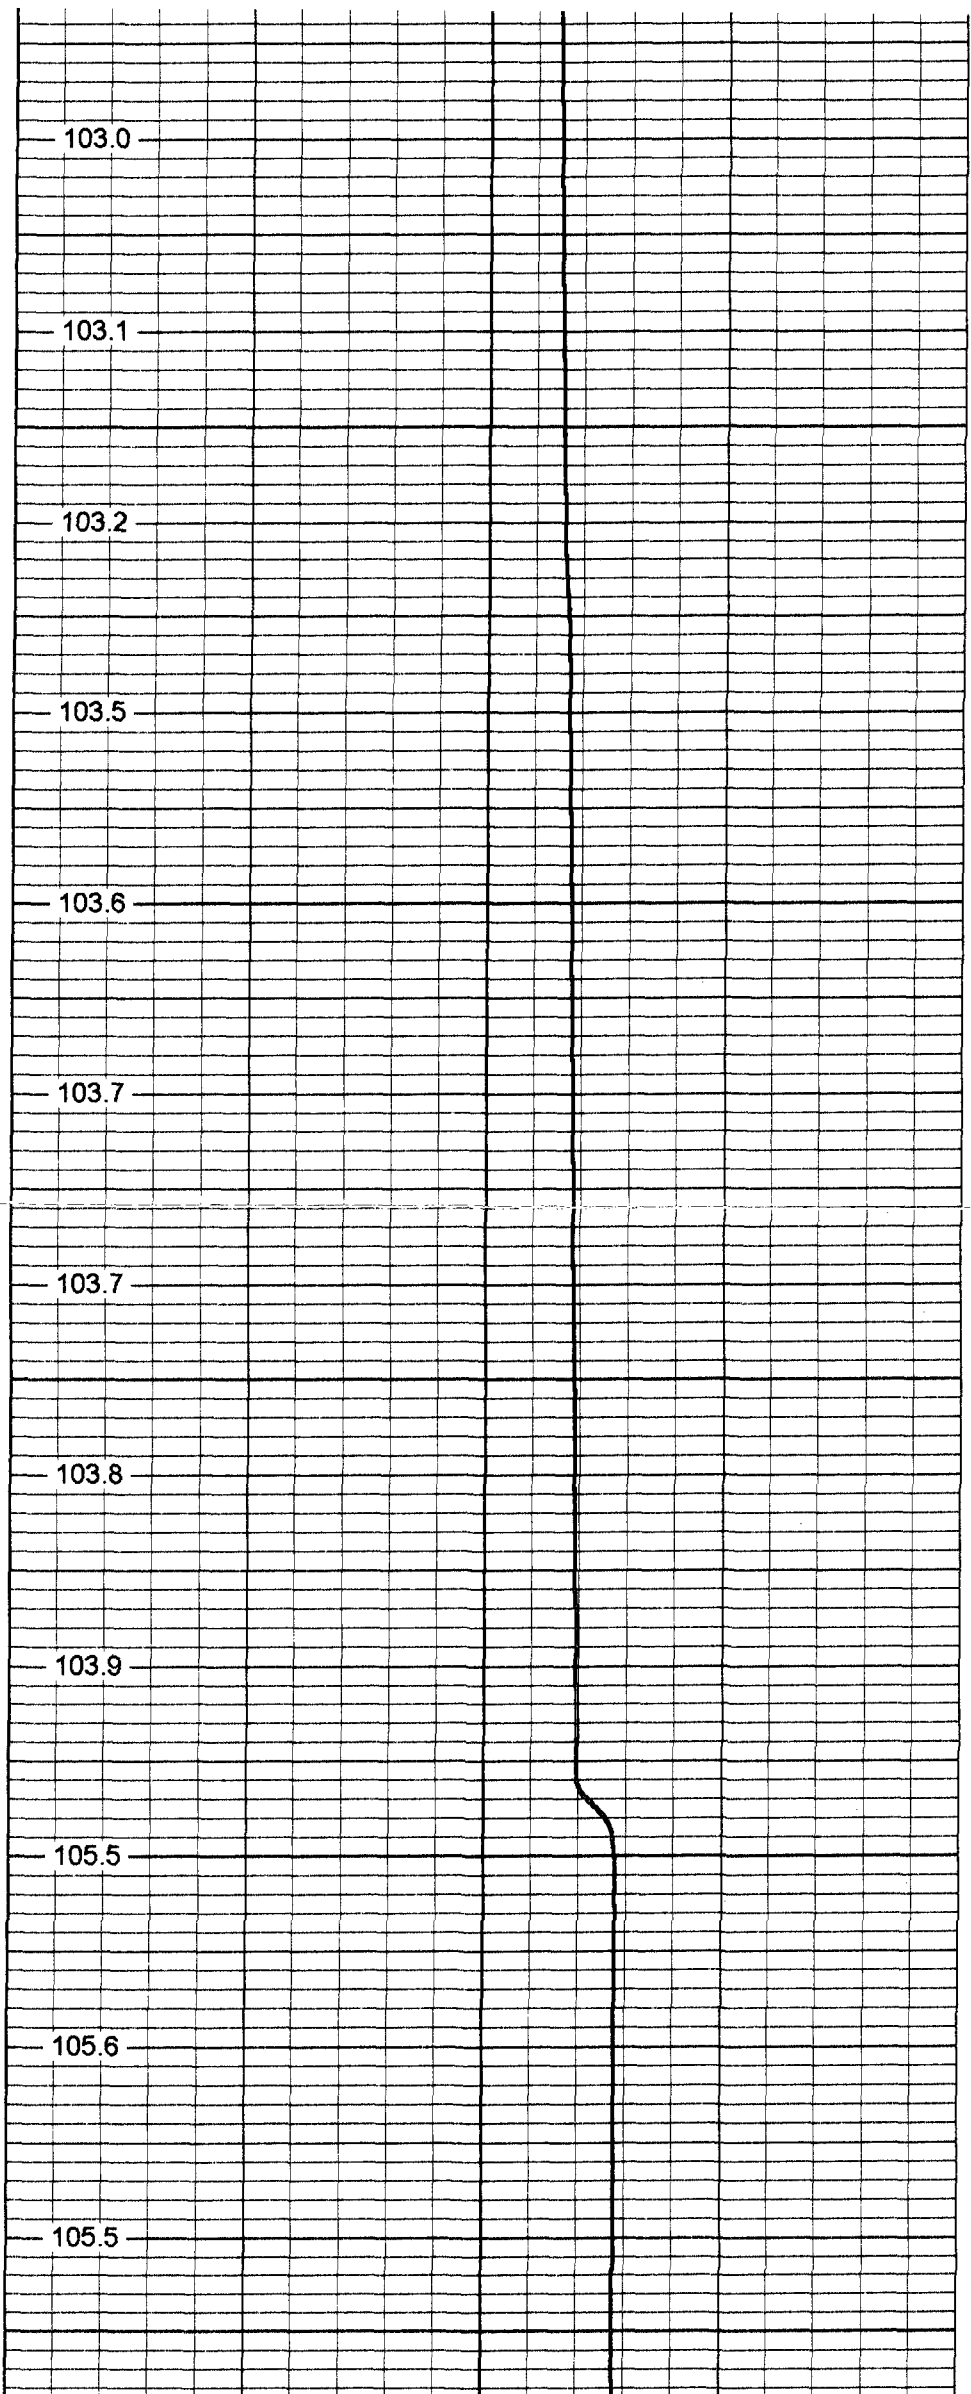

103.0

103.1

103.2

103.5

103.6

103.7

103.7


103.8

103.9

105.5

105.6

105.5

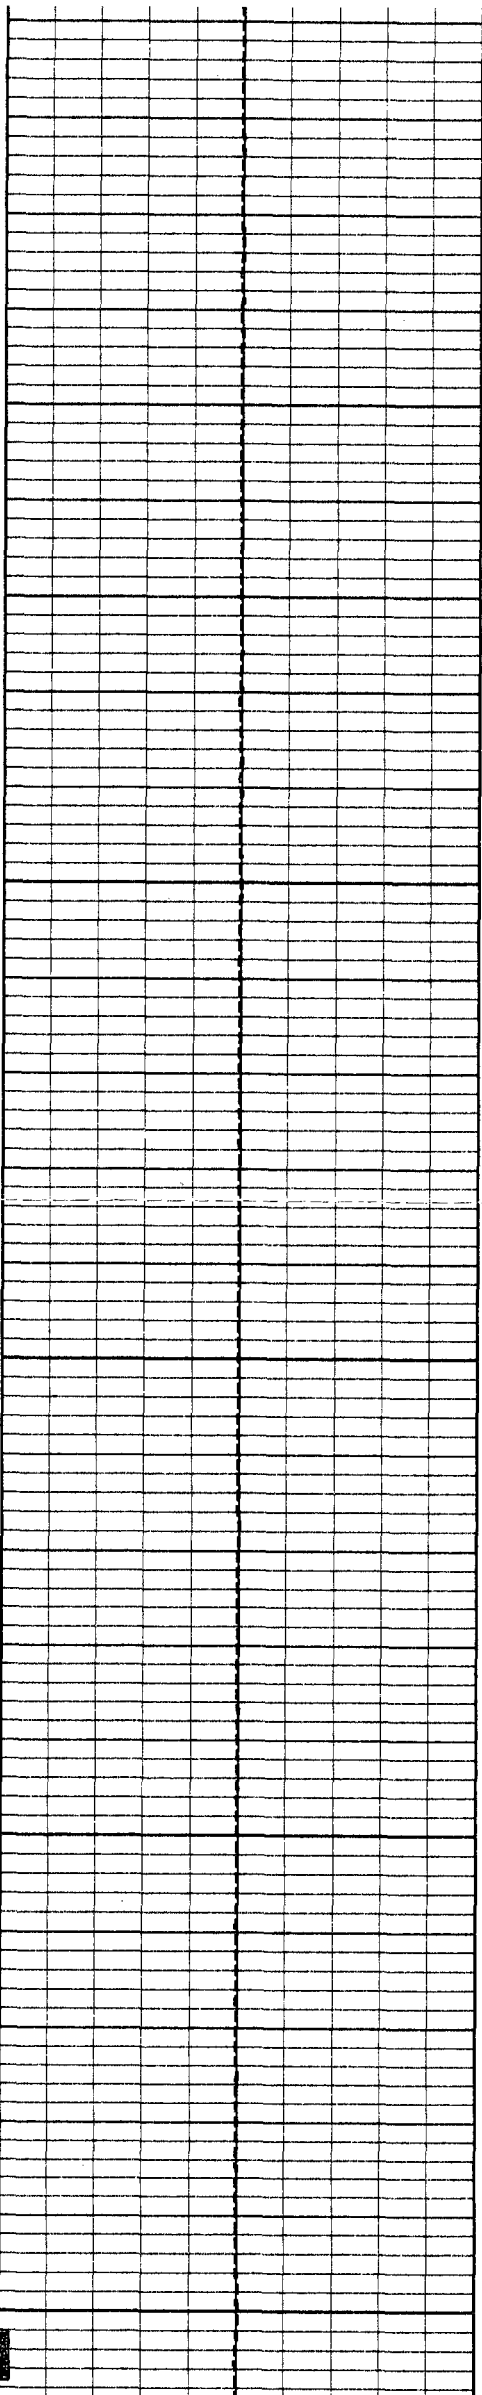

2400

2450

2500

2550

2600

105.5

105.5

105.6

105.6

105.6

105.6

105.6

105.6


105.6


105.6

105.6

105.6

105.6

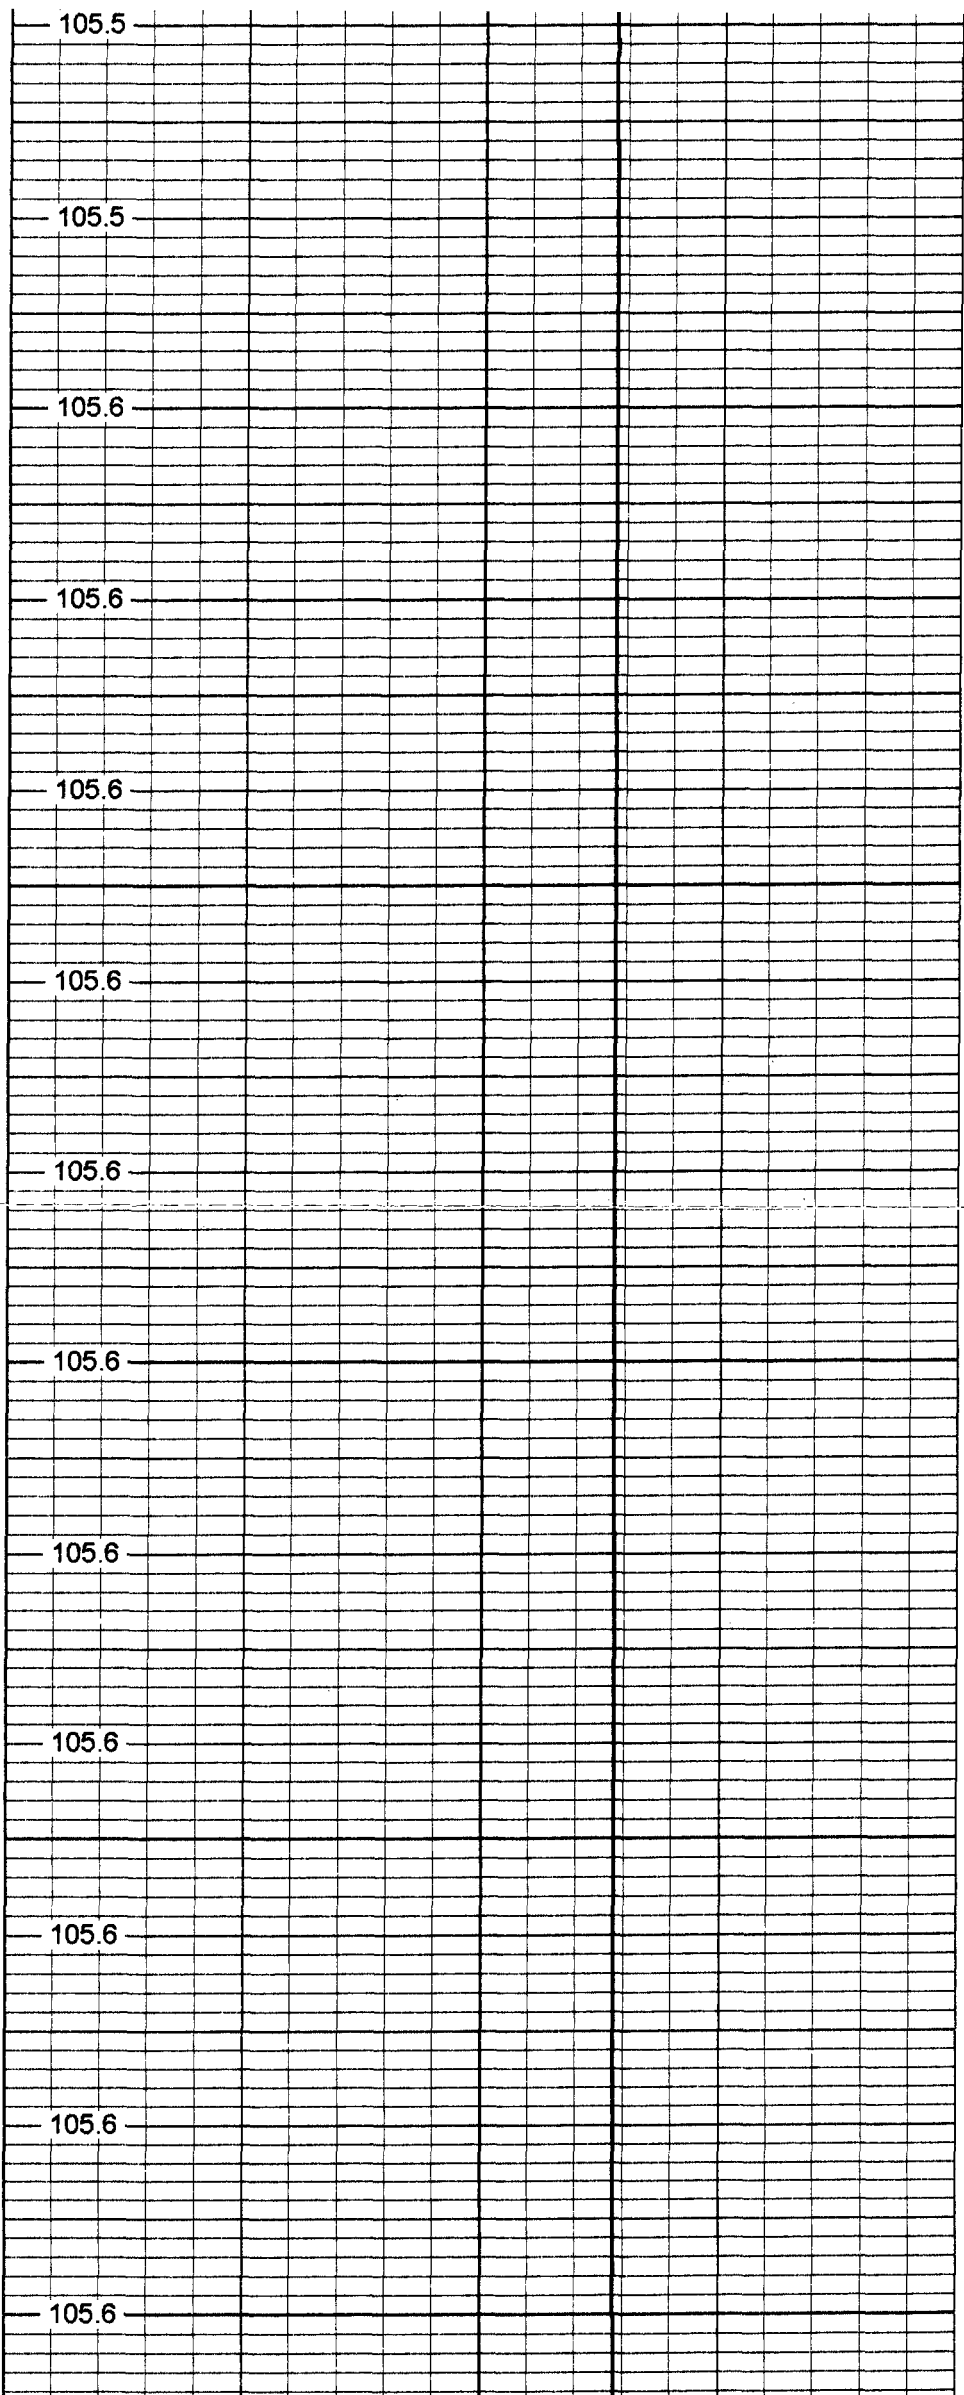

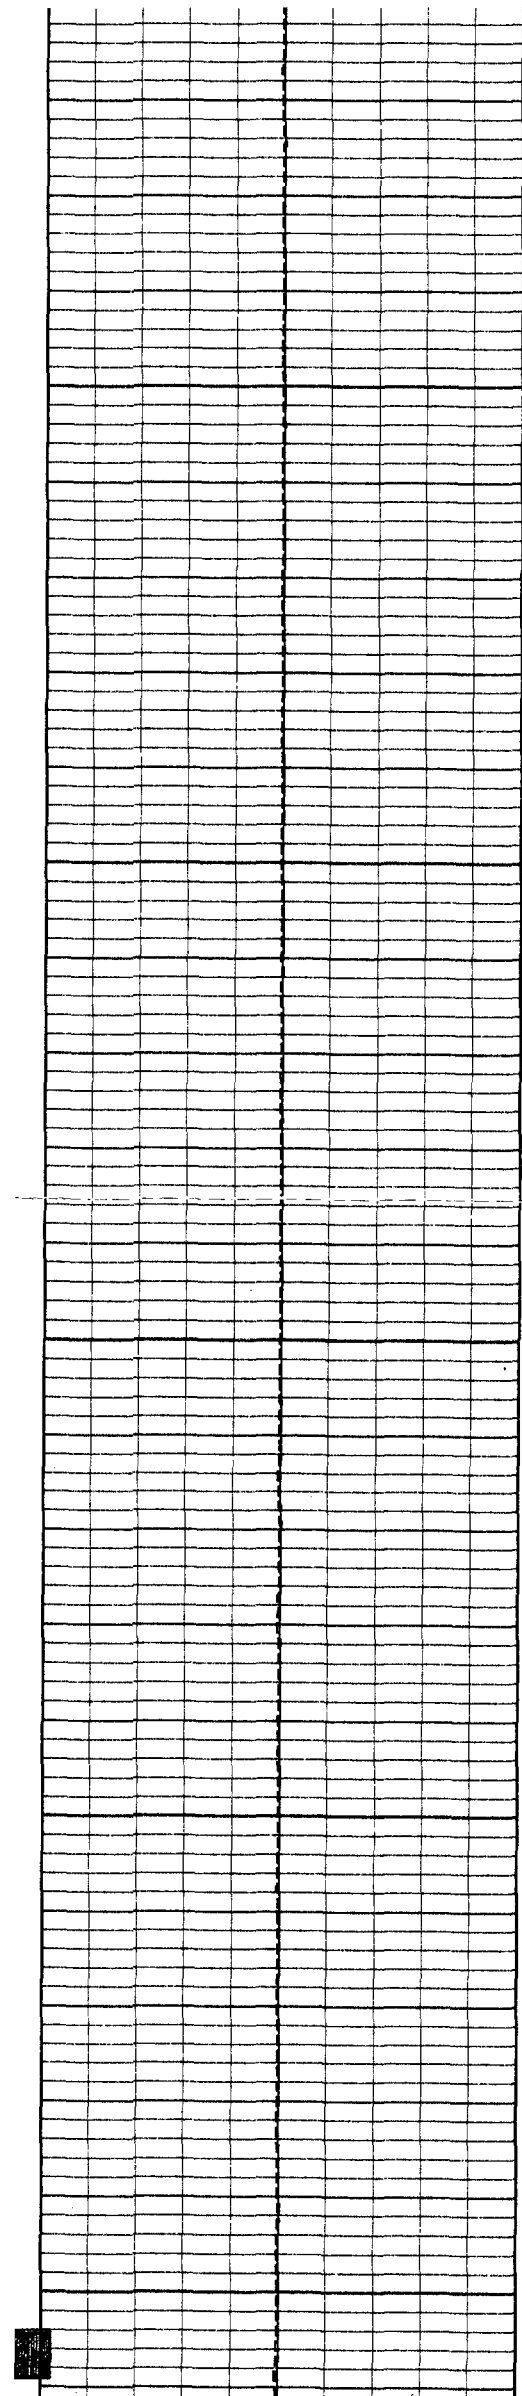

2650

2700

2750

2800

2850

105.6

105.6

105.6

105.6

105.6

105.6

105.6

105.7


105.6

105.6

105.6

105.6

105.6

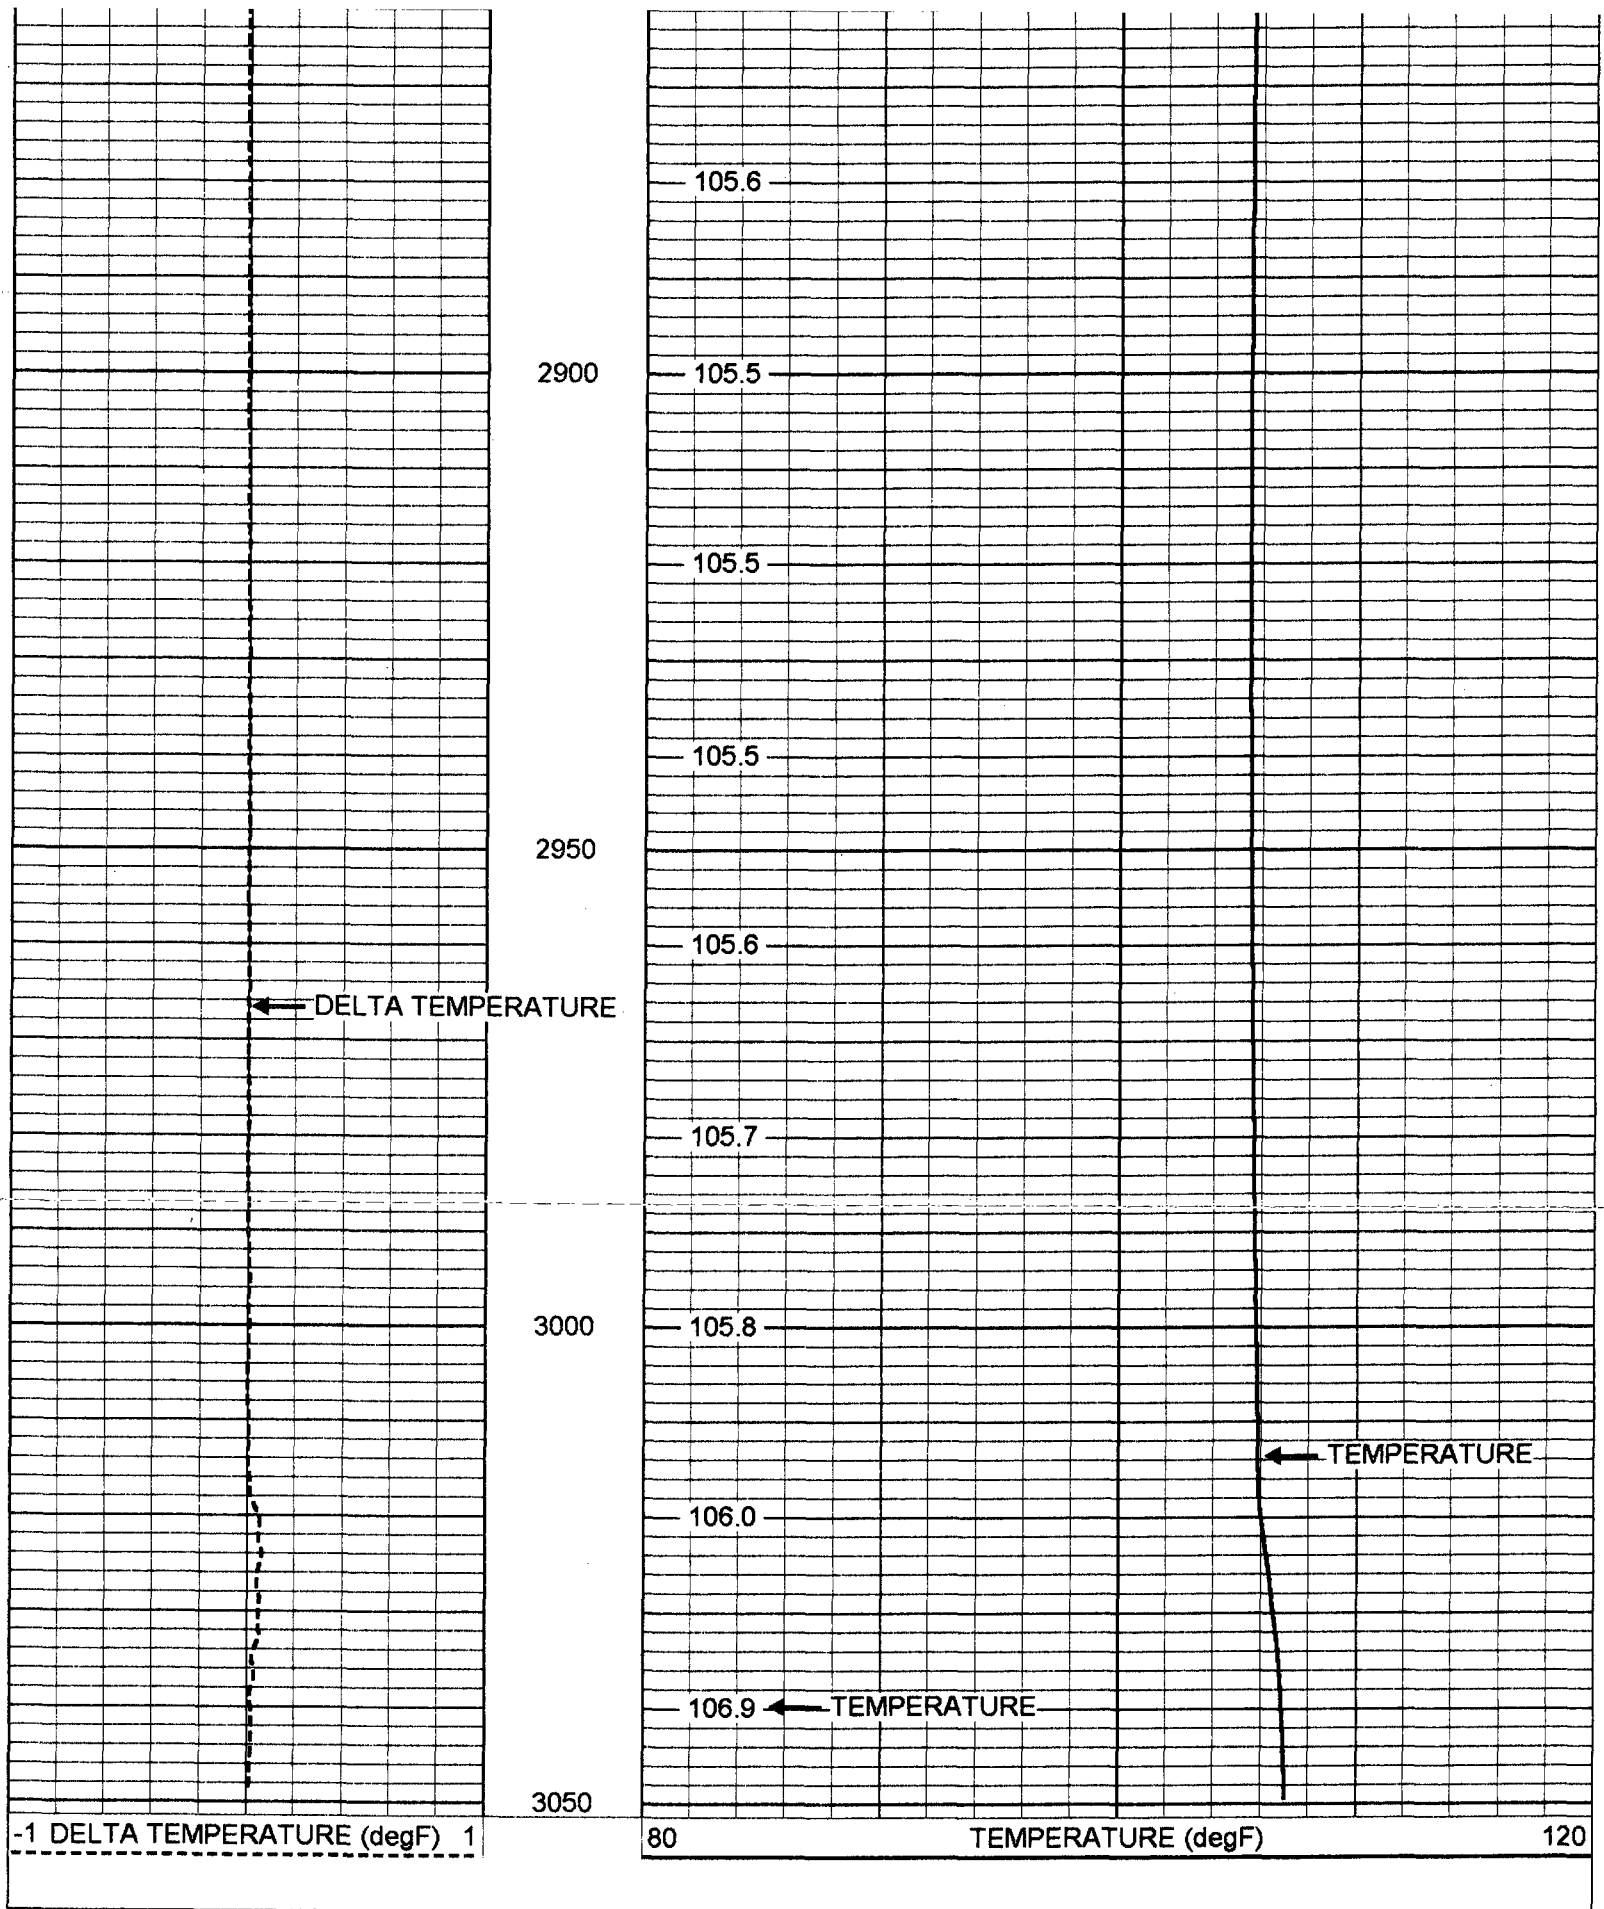

Temperature Calibration Report

Serial Number: 17
 Tool Model: MLS
 Performed: Thu Apr 22 12:56:07 2004

Point #	Reading		Reference	
1	320.1	cps	32	degF
2	700.1	cps	70	degF
3	2000.1	cps	200	degF

