


Log # 101 W # 867 County Shenandoah-205 Date 7/25/63  
 (Gordon Bowman)  
 Owner Bowman Apple Products, Inc. Use Industrial  
 Location 7/10 mile NE of intersection of Virginia Highways 727 and 728;  
approximately 150 yds. N. of Highway 727

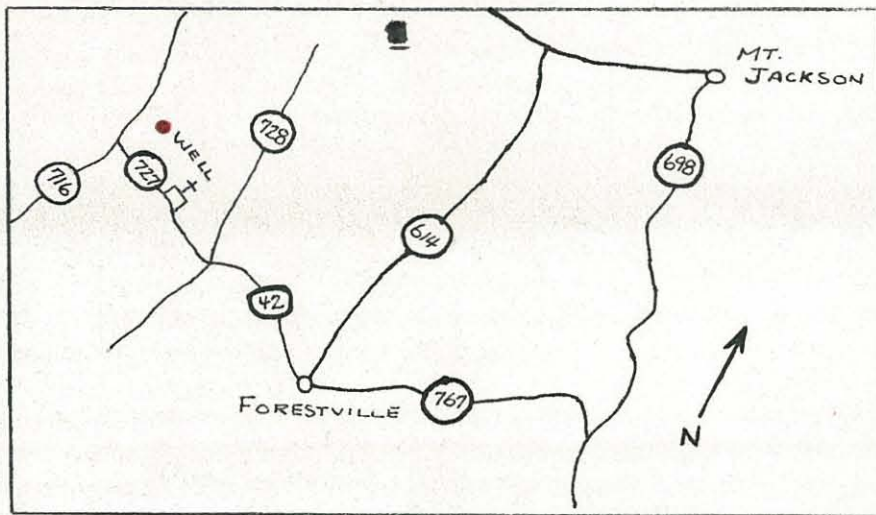

Well Data

Instrument Data


Driller: Sydnor Pump & Well Co., Inc	SP setting <u>200 OHM</u> Approx. 44'/min.
Completed: 7/24/63	Res. " <u>50 Mv</u> " 44'/min.
Total Depth: 500'	Gamma " <u>.005 MR</u> " 28'/min.
Static W. L.: 54.38'	T. C. " <u>E-3; G-16</u>
Casing: 6 1/2x0' - 54'	Fluid: Fresh Water
Bedrock: 17'	Running Time <u>2</u> Hrs. <u>0</u> Mins.
10" x 0' - 52'	Depth of Log: Elec. <u>499'</u> Gamma <u>499'</u>
Hole Size: 6" x 52' - 500'	Ground Electrode <u>in casing 5' below SWL</u>
Yield: 36	
H <sub>2</sub> O Temp: 56° F.	
Aquifers: 160' - 230' (driller)	
Elev: 1200' (topo)	
Geology: Beedmantown dolomite	

Remarks Casing 2' above ground level

*Well shot - yield now 30 gpm*

Logged By Whitfield and Sheffield

Log # 101 W # 867 County Shenandoah-205 Date April 29, '65  
Gordon Bowman  
Owner Bowman Apple Products, Inc. Use Industrial  
Location 7/10 mile NE of Intersection of Va. Highway 727 & 728; approx-  
imately 150 yds. N of Highway 727.

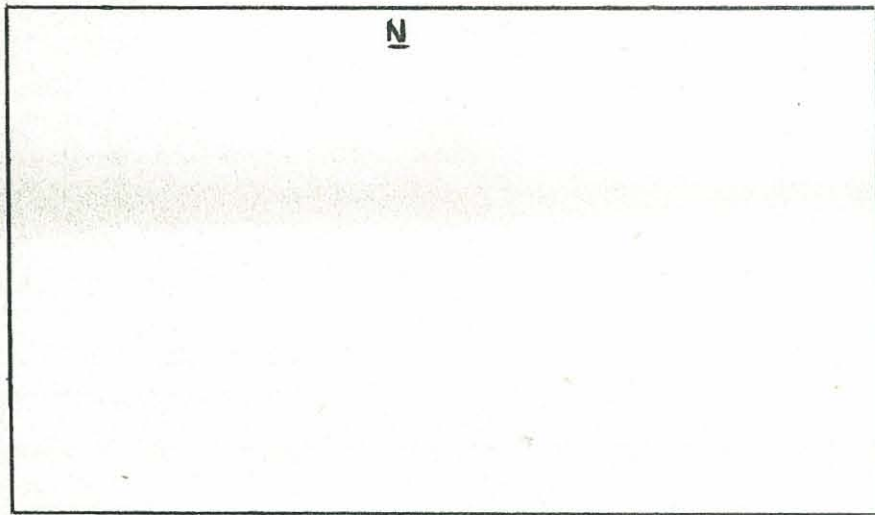

Well Data

Driller: Sydnor Pump & Well Co.  
Completed: 7/24/63  
Total Depth: 500'  
Static W. L.: 57.2'  
Casing: 6 1/2 x 0'-54'  
Bedrock: 17'  
Hole Size: 10" x 0'-52'  
6" x 52'-500'  
Yield: 30gpm - after blasting  
H<sub>2</sub>O Temp: 56°F  
Aquifers: 160'-230' (driller  
Elev: 1200' (topo)  
Geology: Beekmantown dolomite

Instrument Data

SP setting 200' OHM Approx. 50'/min.  
Res. " 50 MV " 50'/min.  
Gamma " .005 " 30'/min.  
T. C. " E-3; G-16  
Fluid: Fresh water  
Running Time 1 Hrs. 45 Mins.  
Depth of Log: Elec. 488 ' Gamma 488 '  
Ground Electrode in casing below  
SWL

Remarks Casing 2' above ground level  
Well shot at bottom W. 300 lbs. of 80% nitro. Yield increased to 200 gpm  
temporarily, then dropped to 30 gpm.

Logged By Gathright & Beverly