


# Delmarva Drilling Co.,

P. O. BOX 188

BRIDGEVILLE, DELAWARE 19933

PC 32-13

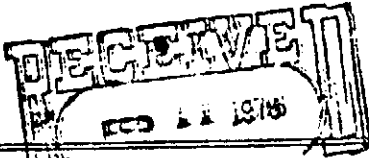

## Water Well Contractors

CUSTOMER Dale Figgs STATE OF DELAWARE WATER RESOURCES SECTION (supply well) TEST JOB 2504  
 ADDRESS Seaford, Delaware 629-7669 DATE 11/18/74  
 LOCATION 42 ft. south of lane and 3 ft. east of lane Permit # 33064

FEET FROM GROUND SURFACE 0 TO.....		WELL LOG
GROUND	2"	top xxx soil
TOTAL DEPTH - FT. 108' CASING 88' SCREEN 20'	0-1	tan sandy clay
	1-3	tan med. sand
	3-4	white clay
	4-9	tan med. to coarse sand
	9-37	gray clay
	37-66	tan med. to coarse sand
	66-111	gray clay
	111-121	
		RECEIVED FEB 17 1975 DELAWARE GEOLOGICAL SURVEY
		4 to 5 tanks water & no drilling clay used 10' stem @ 35'

WELL NO. <u>1</u>	DIAMETER OF WELL <u>4"</u>	DEPT. OF WELL <u>108'</u>
HRS. PUMPED <u>1 hr. 35 min.</u>	SLOT SIZE <u>.030</u>	TYPE OF CASING <u>PVC</u>
CAPACITY G.P.M. <u>20</u>	DRILLING MACHINE NO. <u>D-1</u>	LENGTH OF CASING <u>88</u>
STATIC LEVEL <u>17</u>	DRILLER <u>Calvin Wallace</u>	DISTANCE TO TOP OF SCREEN <u>80-108</u>
PUMPING LEVEL <u>25</u>	GRAVEL <u>#2 morie</u>	TYPE SCREEN <u>PVC</u>
SPECIFIC CAPACITY <u>8.5</u>	BAGS OF CEMENT <u>2</u>	SIZE OF SCREEN <u>4"</u>
PUMPED WITH <u>air and pumper</u>	DATE WELL COMPLETED <u>11/18/74</u>	
DEPTH OF CEMENT GROUT <u>clay 0-15'</u>	DRILLER'S HELPER <u>D. Short</u>	<u>Calvin Wallace</u>
DEPTH GRAVEL PACKED <u>90-115</u>		WELL DRILLER SIGNATURE

Seaford, Delaware